


FEATURES

- Durable 310 stainless steel probe sheath
- IEC 584 class 1 tolerance for optimum accuracy
- Mineral insulation for flexibility, durability and high performance
- Insulated hot junction for reduction in electrical interference

RS PRO Type K Thermocouple 250mm Length, 1mm Diameter → +1100°C

RS Stock No.: 787-7706

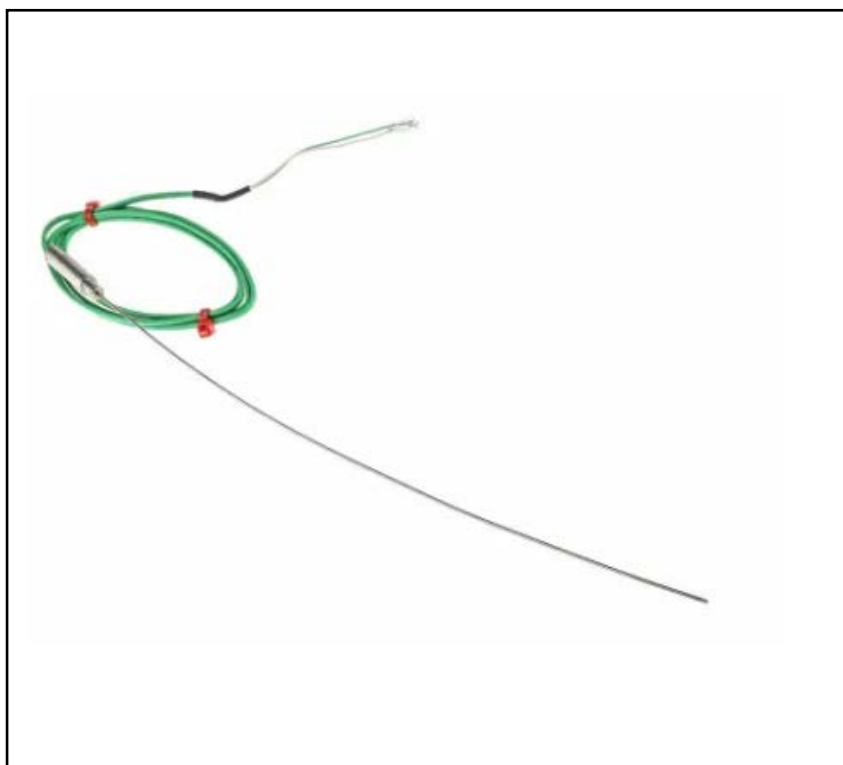

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

From RS Pro a range of type K thermocouple temperature sensors that conform to IEC 584 standards with class 1 tolerance for optimum accuracy. These sensors or probes have a durable construction and feature a stainless steel 310 probe sheath and a PFA insulated lead. The mineral insulated flexible probe sheath can be bent and formed to suit a wide range of applications. The thermocouple has a single element insulated hot junction for a reduction in electrical interference and a plain pot seal with a temperature rating of 200°C.

General Specifications

| | |
|--------------------------------------|--|
| Thermocouple Type | Type K |
| Temperature Measurement Range | -40°C to 1100°C -40°C to 1100°C |
| Construction | Flexible mineral insulated probe with stainless steel sheath, plain pot seal & 1 metre extension cable |
| Measuring Junction | Single element, junction insulated from sheath (offers protection against spurious electrical signals) |
| Application | Heat exchangers, power station, brick and cement kilns, heat treatment and annealing furnaces, thermostats, food thermometers, vehicle diagnostics and in laboratories High pressure and vacuum applications, and able to withstand high levels of vibration. |

Mechanical Specifications

| | |
|----------------------------------|-----------------|
| Probe Diameter | 1mm |
| Probe Length | 250mm |
| Probe Body Material | Stainless Steel |
| Termination Type | Cable |
| Compensating Cable Length | 1m |

Approvals

| | |
|----------------------------------|---------|
| Compliance/Certifications | IEC 584 |
| Standards Met | IEC |



| T/C Type | Conductors | Length | Termination | +Positive tail wire | -Negative tail wire code | Allied Code | RS order Code |
|----------|------------|----------|-------------|---------------------|--------------------------|-------------|-----------------|
| 'K' | 1/0.2mm | 1 metre | Mini plug | Green | White | 70643600 | 363-0250 |
| 'K' | 1/0.2mm | 2 metre | Mini plug | Green | White | | 110-4482 |
| 'K' | 1/0.2mm | 5 metre | Mini plug | Green | White | | 123-6306 |
| 'K' | 1/0.2mm | 10 metre | Mini plug | Green | White | | 123-6307 |
| 'J' | 1/0.2mm | 1 metre | Mini plug | Black | White | 70643599 | 363-0244 |
| 'J' | 1/0.2mm | 2 metre | Mini plug | Black | White | | 123-6308 |
| 'J' | 1/0.2mm | 5 metre | Mini plug | Black | White | | 123-6309 |
| 'J' | 1/0.2mm | 10 metre | Mini plug | Black | White | | 123-6310 |
| 'T' | 1/0.2mm | 1 metre | Mini plug | Brown | White | 70643601 | 363-0266 |
| 'T' | 1/0.2mm | 2 metre | Mini plug | Brown | White | | 123-6311 |
| 'T' | 1/0.2mm | 5 metre | Mini plug | Brown | White | | 123-6312 |
| 'T' | 1/0.2mm | 10 metre | Mini plug | Brown | White | | 123-6313 |

| T/C Type | Conductors | Cores | Reel Length | Allied code | RS order code |
|----------|------------|---------------|-------------|-------------|-----------------|
| J | 1/0.2mm | +Black/-White | 25 metres | 70657194 | 827-5980 |
| J | 1/0.2mm | +Black/-White | 50 metres | 70657195 | 827-5984 |
| J | 1/0.315mm | +Black/-White | 25 metres | 70657198 | 827-5993 |
| J | 1/0.315mm | +Black/-White | 50 metres | 70657199 | 827-5996 |
| K | 1/0.315mm | +Green/-White | 25 metres | 70657200 | 827-6000 |
| K | 1/0.315mm | +Green/-White | 50 metres | 70657205 | 827-6019 |
| T | 1/0.315mm | +Brown/-White | 25 metres | 70657208 | 827-6028 |
| T | 1/0.315mm | +Brown/-White | 50 metres | 70657206 | 827-6022 |
| J | 1/0.508mm | +Black/-White | 25 metres | 70657197 | 827-5990 |
| J | 1/0.508mm | +Black/-White | 50 metres | 70657201 | 827-6003 |
| K | 1/0.508mm | +Green/-White | 25 metres | 70657203 | 827-6012 |
| K | 1/0.508mm | +Green/-White | 50 metres | 70657204 | 827-6016 |
| J | 7/0.2mm | +Black/-White | 25 metres | 70657202 | 827-6006 |
| K | 7/0.2mm | +Green/-White | 25 metres | 70657207 | 827-6025 |
| T | 7/0.2mm | +Brown/-White | 25 metres | 70657209 | 827-6031 |
| N | 7/0.2mm | +Pink/-White | 25 metres | 70657210 | 827-6034 |

| | Conductors | Cores | Jacket | Reel Length | Allied Code | RS order code |
|-------------------|------------|---------------|--------|-------------|-------------|-----------------|
| Extension: | | | | | | |
| KX | 7/0.2mm | +Green/-White | Green | 10 metres | 70657084 | 827-5615 |
| KX | 7/0.2mm | +Green/-White | Green | 25 metres | 70641729 | 236-3820 |
| KX | 7/0.2mm | +Green/-White | Green | 50 metres | 70657085 | 827-5619 |
| KX | 7/0.2mm | +Green/-White | Green | 100 metres | 70646156 | 611-7889 |
| KX | 7/0.2mm | +Green/-White | Green | 200 metres | 70657088 | 827-5628 |
| JX | 7/0.2mm | +Black/-White | Black | 10 metres | 70641640 | 219-4753 |
| JX | 7/0.2mm | +Black/-White | Black | 25 metres | 70657078 | 827-5592 |
| JX | 7/0.2mm | +Black/-White | Black | 50 metres | 70657079 | 827-5596 |
| JX | 7/0.2mm | +Black/-White | Black | 100 metres | 70641737 | 236-3915 |
| JX | 7/0.2mm | +Black/-White | Black | 200 metres | 70657081 | 827-5606 |
| TX | 7/0.2mm | +Brown/-White | Brown | 10 metres | 70641637 | 219-4703 |
| TX | 7/0.2mm | +Brown/-White | Brown | 25 metres | 70641734 | 236-3870 |
| TX | 7/0.2mm | +Brown/-White | Brown | 50 metres | 70657095 | 827-5653 |
| TX | 7/0.2mm | +Brown/-White | Brown | 100 metres | 70651749 | 762-1146 |
| TX | 7/0.2mm | +Brown/-White | Brown | 200 metres | 70657098 | 827-5662 |
| NX | 7/0.2mm | +Pink/-White | Pink | 10 metres | 70641635 | 219-4668 |
| NX | 7/0.2mm | +Pink/-White | Pink | 25 metres | 70657091 | 827-5637 |
| NX | 7/0.2mm | +Pink/-White | Pink | 50 metres | 70657089 | 827-5631 |
| NX | 7/0.2mm | +Pink/-White | Pink | 100 metres | 70657092 | 827-5640 |

| | Conductors | Cores | Jacket | Reel Length | Allied Code | RS order code |
|----------------------|------------|----------------|--------|-------------|-------------|-----------------|
| Compensating: | | | | | | |
| VX (KCB) | 7/0.2mm | +Green/-White | Green | 10 metres | 70657082 | 827-5609 |
| VX (KCB) | 7/0.2mm | +Green/-White | Green | 25 metres | 70641629 | 219-4551 |
| VX (KCB) | 7/0.2mm | +Green/-White | Green | 50 metres | 70657080 | 827-5603 |
| VX (KCB) | 7/0.2mm | +Green/-White | Green | 100 metres | 70641630 | 219-4573 |
| VX (KCB) | 7/0.2mm | +Green/-White | Green | 200 metres | 70657083 | 827-5612 |
| VX (KCB) | 13/0.2mm | +Green/-White | Green | 10 metres | 70657086 | 827-5621 |
| VX (KCB) | 13/0.2mm | +Green/-White | Green | 25 metres | 70657087 | 827-5625 |
| VX (KCB) | 13/0.2mm | +Green/-White | Green | 50 metres | 70657090 | 827-5634 |
| VX (KCB) | 13/0.2mm | +Green/-White | Green | 100 metres | 70651750 | 762-1152 |
| U (RCA) | 7/0.2mm | +Orange/-White | Orange | 10 metres | 70657096 | 827-5656 |
| U (RCA) | 7/0.2mm | +Orange/-White | Orange | 25 metres | 70646158 | 611-7902 |
| U (RCA) | 7/0.2mm | +Orange/-White | Orange | 50 metres | 70657097 | 827-5659 |
| U (RCA) | 13/0.2mm | +Orange/-White | Orange | 10 metres | 70641641 | 219-4769 |
| U (RCA) | 13/0.2mm | +Orange/-White | Orange | 25 metres | 70657093 | 827-5643 |
| U (RCA) | 13/0.2mm | +Orange/-White | Orange | 50 metres | 70657094 | 827-5647 |

| T/C Type | Conductors | Cores | Reel Length | Allied code | RS order code |
|----------|------------|--------------|-------------|-------------|-----------------|
| KX | 1/0.2mm | +Yellow/-Red | 25 metres | 70656106 | 814-0030 |
| KX | 1/0.2mm | +Yellow/-Red | 50 metres | 70656111 | 814-0049 |
| KX | 1/0.2mm | +Yellow/-Red | 100 metres | 70656109 | 814-0042 |
| KX | 7/0.2mm | +Yellow/-Red | 25 metres | 70656110 | 814-0046 |
| KX | 7/0.2mm | +Yellow/-Red | 50 metres | 70656113 | 814-0055 |
| KX | 7/0.2mm | +Yellow/-Red | 100 metres | 70656114 | 814-0058 |
| KX | 1/0.3mm | +Yellow/-Red | 25 metres | 70656104 | 814-0024 |
| KX | 1/0.3mm | +Yellow/-Red | 50 metres | 70656107 | 814-0033 |
| KX | 1/0.3mm | +Yellow/-Red | 100 metres | 70656108 | 814-0036 |
| TX | 1/0.3mm | +Blue/-Red | 25 metres | 70656121 | 814-0080 |
| TX | 1/0.3mm | +Blue/-Red | 50 metres | 70656126 | 814-0099 |
| TX | 1/0.3mm | +Blue/-Red | 100 metres | 70656124 | 814-0092 |
| TX | 1/0.2mm | +Blue/-Red | 25 metres | 70656125 | 814-0096 |
| TX | 1/0.2mm | +Blue/-Red | 50 metres | 70656128 | 814-0106 |
| TX | 1/0.2mm | +Blue/-Red | 100 metres | 70656129 | 814-0109 |

| T/C Type | Conductors | Cores | Jacket | Reel Length | Allied code | RS order code |
|----------------------|------------|--------------|--------|-------------|-------------|-----------------|
| Extension: | | | | | | |
| KX | 7/0.2mm | +Yellow/-Red | Yellow | 25 m | 70656102 | 814-0018 |
| KX | 7/0.2mm | +Yellow/-Red | Yellow | 100 m | 70656105 | 814-0027 |
| KX | 7/0.2mm | +Yellow/-Red | Yellow | 200 m | 70656103 | 814-0020 |
| JX | 7/0.2mm | + White/-Red | Black | 25 m | 70656096 | 813-9995 |
| JX | 7/0.2mm | + White/-Red | Black | 100 m | 70656098 | 814-0005 |
| JX | 7/0.2mm | + White/-Red | Black | 200 m | 70656099 | 814-0008 |
| TX | 7/0.2mm | +Blue/-Red | Blue | 25 m | 70656119 | 814-0074 |
| TX | 7/0.2mm | +Blue/-Red | Blue | 100 m | 70656122 | 814-0083 |
| TX | 7/0.2mm | +Blue/-Red | Blue | 200 m | 70656123 | 814-0086 |
| Compensating: | | | | | | |
| VX (KCB) | 7/0.2mm | +Yellow/-Red | Yellow | 25 m | 70656127 | 814-0103 |
| VX (KCB) | 7/0.2mm | +Yellow/-Red | Yellow | 100 m | 70656130 | 814-0112 |
| VX (KCB) | 7/0.2mm | +Yellow/-Red | Yellow | 200 m | 70656131 | 814-0115 |