NO	DESCRIPTION	DATE
1	BACKGROUND FORMAT UPDATED	02.15.05'
2	BACKGROUND FORMAT UPDATED	05.10.11'
3	DEL PROOF VOLTAGE WORKING VOLTAGE → VOLTAGE RATING	05.20.15'

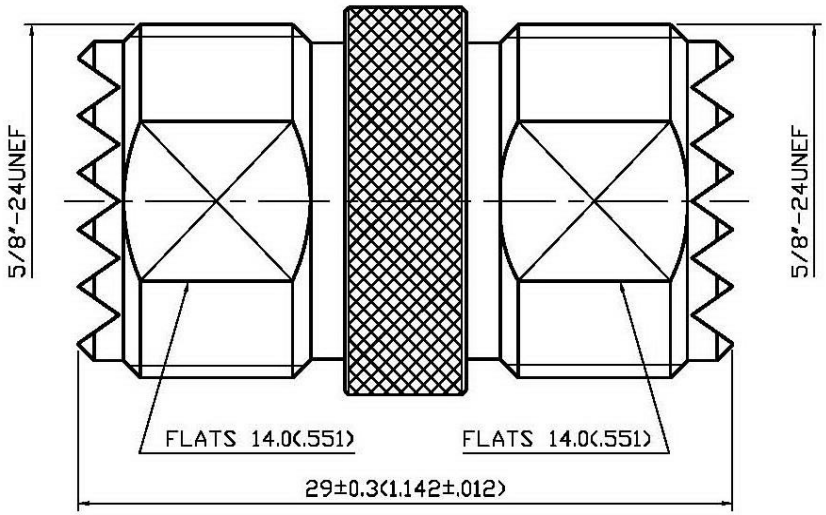

1.0 ELECTRICAL

1.1 FREQUENCY RANGE: DC-300 MHz
1.2 NOMINAL IMPEDANCE: 50 OHMS
1.3 VOLTAGE RATING: 500 VOLTS MAX. 3

2.0 MATERIALS

2.1 BODIES: BRASS PER JIS-C3604
2.2 CENTER CONTACT: BERYLLIUM COPPER PER ASTM B196 UNS C17300
2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710

3.0 FINISHES AND OTHERS

3.1 SEE BELOW TABLE FOR DETAILS.

4.0 ENVIRONMENTAL

4.1 OPERATING TEMPERATURE RANGE: -55° C TO +85° C

NO	DESCRIPTION	MATERIAL	Q'TY	FINISH
4	WASHER	BRASS	1	SILVER 70μ" MIN
3	INSULATION	TEFLON	2	NONE
2	CENTER CONTACT	BERYLLIUM COPPER	1	SILVER 70μ" MIN
1	BODY	BRASS	1	SILVER 70μ" MIN

APPROVED by _____ DATE: _____

DESCRIPTION	STRAIGHT UHF JACK-JACK ADAPTER								
製圖	DRAWN: Kristina	TOLERANCE		品名 TITLE	17-11-3 T.S.S \ROHS COMPLIANT (50Ω)	日期	DATE: 06.21.97'	版次	REV.: A-3
		.X	±0.2						
檢圖	CHECK: Arc	.XX	±0.1	單位	UNIT: mm(in)	DWG.NO.	17-0104		
		.XXX	±0.05						
認定	APPROVAL: Jenny	ANGLE	±5°	比例	SCALE: 4:1				