



NO	DESCRIPTION	DATE
①	BACKGROUND FORMAT UPDATED	11.12.03'
②	BACKGROUND FORMAT UPDATED	11.20.09'
③	BACKGROUND FORMAT UPDATED	03.09.11'
④	BOM UPDATED ; ADD (P/N3034961)	03.24.11'

SPECIFICATIONS:

MECHANICAL CHARACTERISTICS:
MATING/UNMATING-500 CYCLES.

ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE-50 OHMS.
FREQUENCY RANGE-0-1 GHZ.
OPERATING VOLTAGE-500 VOLTS RMS.
CONTACT RESISTANCE-3.0 MILLIOHMS MAX.(GOLD)
DIELECTRIC WITHSTANDING VOLTAGE-1500 VOLTS RMS.
INSULATION RESISTANCE-5000 MEGOHMS MIN.

ENVIRONMENTAL CHARACTERISTICS:
TEMPERATURE RANGE- -50° TO +85° C.
THERMAL SHOCK-MIL-STD-202,METHOD 107,COND.B.
PHYSICAL SHOCK-MIL-STD-202,METHOD 204,COND.B.

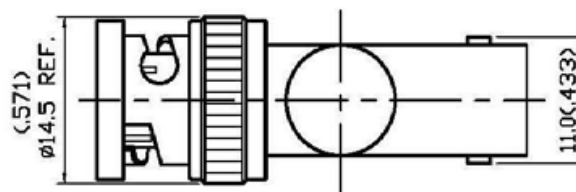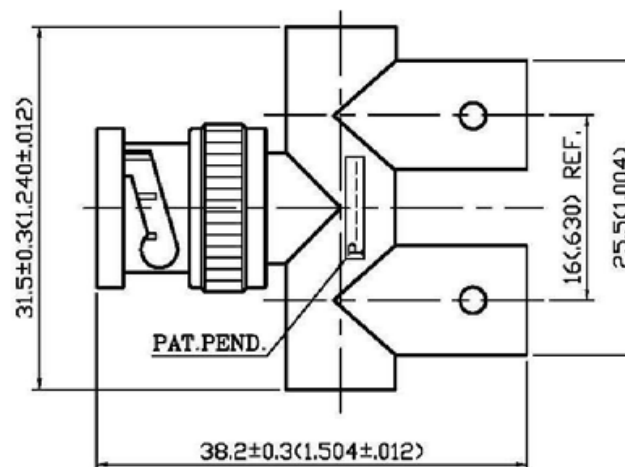

(P/N:3034961) ④

APPROVED

by _____ DATE: _____

14	INSULATOR	POLYPROPLENE (UL 94HB).
13	WASHER	NICKEL PLATING OVER COPPER STRIP.
12	SIDE COVER	NICKEL PLATING OVER ZINC ALLOY.
11	RETENTION CONTACT	GOLD PLATING OVER BRASS.
10	SPACER	POM
9	GASKET	SILICONE RUBBER.
8	SPRING WASHER	NICKEL PLATING OVER STEEL.
7	INSULATORS	POLYPROPLENE (UL 94HB).
6	RETENTION WASHER	NICKEL PLATING OVER COPPER STRIP.
5	FEMALE CONTACT	GOLD PLATING OVER PHOSPHOR BRONZE
4	MALE CONTACT	GOLD PLATING OVER BRASS.
3	OUTER CONTACT	NICKEL PLATING OVER COPPER BRASS.
2	BAYONET SLEEVE	NICKEL PLATING OVER ZINC ALLOY.
1	ADAPTOR BODY	NICKEL PLATING OVER ZINC ALLOY.
	DESC.	MATERIAL & TREATMENT

DESCRIPTION		BNC Y ADAPTER JACK-PLUG-JACK								
製圖	DRAWN	TOLERANCE		品名	13-39-5	D.G.Z	日期	DATE	版次	REV.
	Yoko	X	±0.2	TITLE	\ROHS COMPLIANT (50Ω)		10.26.93'		A-4	
檢圖	CHECK	XX	±0.1	單位	UNIT	DWG.NO.	13-0226			
	Arc	XXX	±0.05	mm(in)	SCALE					
認定	APPROVAL	ANGLE	±5°	比例	2:1					
	Jenny									