


CS65 Waterproof Compact Weighing Scale



SP-scale

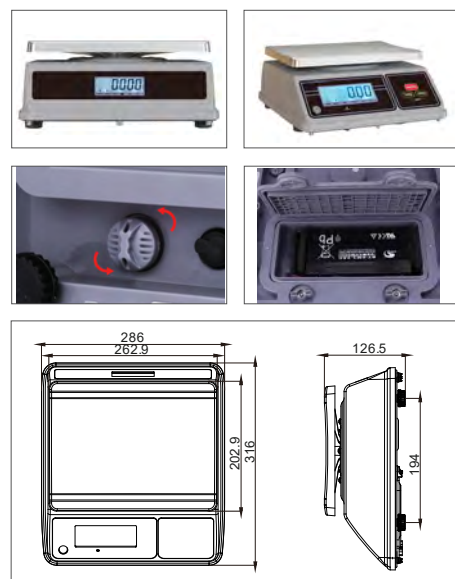

Features

High mobility: battery operation, compact, light weight construction, it is suitable for the use in several locations (kitchen, sales office, cafeteria, Food industry-Laboratory etc.)

Easy to clean: stainless steel pan. Its smooth surfaces make it simple to clean

Easy to read: 6 digits 25mm digits high LCD display, with white color LED backlight

Full function: zero, tare, units conversion

Technical Data

Display: LCD display, digit height 25 mm, with white color LED backlight

Power: AC adapter (100~240VAC/12V500mA), lead acid battery (6V/3.2Ah), operation time: 70 hours

Dimensions: 286x316x126.5 mm

Pan size: 200x260 mm

Net weight: 3.6kg

Gross weight: 4.4kg

Operation temperature: -10°C/40°C

Accessories

- Rear display

Standard



Factory Option




Model	Weighing Capacity [Max]kg	Readability [d]g	Verification value [e]g	Minimal load [Min]g
CS65-S-3K	3	0.5	/	10
CS65-S-6K	6	1	/	20
CS65-S-15K	15	2	/	40
CS65-S-25K	25	5	/	100
CS65-S-30K	30	5	/	100
CS65-O-3K	3	1	1	20
CS65-O-6K	6	2	2	40
CS65-O-15K	15	5	5	100
CS65-O-25K	25	10	10	200
CS65-O-30K	30	10	10	200
CS65-D-6K	3 6	1 2	1 2	20
CS65-D-15K	6 15	2 5	2 5	40
CS65-D-25K	15 25	5 10	5 10	100
CS65-D-30K	15 30	5 10	5 10	100

CS65-3 Waterproof Compact Weighing Scale



SP-scale

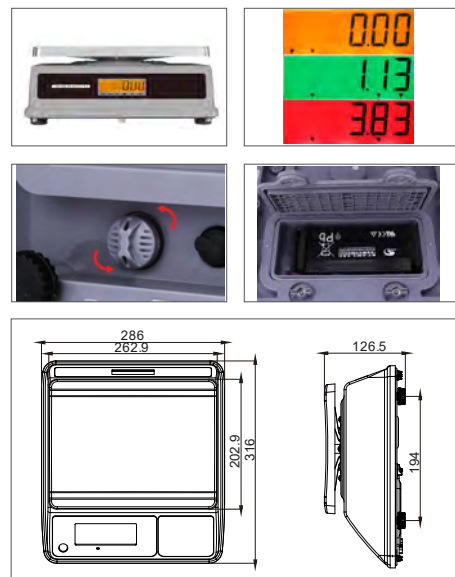

Features

High mobility: battery operation, compact, light weight construction, it is suitable for the use in several locations (kitchen, sales office, cafeteria, Food industry-Laboratory etc.)

Easy to clean: stainless steel pan. Its smooth surfaces make it simple to clean

Easy to read: 6 digits 25mm digits high LCD display, with 3 color LED backlight

Full function: zero, tare, check weighing with 3 color backlight

Technical Data

Display: LCD display, digit height 25 mm, with 3 color LED backlight

Power: AC adapter (100~240VAC/12V500mA), lead acid battery (6V/3.2Ah), operation time: 70 hours

Dimensions: 286x316x126.5 mm

Pan size: 200x260 mm

Net weight: 3.6kg

Gross weight: 4.4kg

Operation temperature: -10°C/40°C

Accessories

- Rear display

Standard



Factory Option



Model	Weighing Capacity [Max]kg	Readability [d]g	Verification value [e]g	Minimal load [Min]g
CS65-S3-3K	3	0.5	/	10
CS65-S3-6K	6	1	/	20
CS65-S3-15K	15	2	/	40
CS65-S3-25K	25	5	/	100
CS65-S3-30K	30	5	/	100
CS65-O3-3K	3	1	1	20
CS65-O3-6K	6	2	2	40
CS65-O3-15K	15	5	5	100
CS65-O3-25K	25	10	10	200
CS65-O3-30K	30	10	10	200
CS65-D3-6K	3 6	1 2	1 2	20
CS65-D3-15K	6 15	2 5	2 5	40
CS65-D3-25K	15 25	5 10	5 10	100
CS65-D3-30K	15 30	5 10	5 10	100

CT65 Waterproof Compact Weighing Scale s/s

SP-scale



Features

IP65 waterproof protection, Stainless steel construction

High mobility: battery operation, compact, light weight construction, it is suitable for the use in several locations (kitchen, sales office, cafeteria, Food industry-Laboratory etc.)

Easy to clean: stainless steel pan and housing. Its smooth surfaces make it simple to clean

Full function: zero, tare, unit change

Technical Data

Display: LCD display, digit height 25 mm, with white color LED backlight

Power: AC adapter (100~240VAC/12V500mA), lead acid battery (6V/3.2Ah), operation time: 70 hours

Dimensions: 242.9×299.7×126.7 mm

Pan size: 230×190 mm

Net weight: 3.8 kg

Operation temperature: -10°C/40°C

Accessories

- Rear display

Standard



Factory Option



Model	Weighing Capacity [Max]kg	Readability [d]g	Verification value [e]g	Minimal load [Min]g
CT65-S-3K	3	0.5	/	10
CT65-S-6K	6	1	/	20
CT65-S-15K	15	2	/	40
CT65-S-25K	25	5	/	100
CT65-S-30K	30	5	/	100
CT65-O-3K	3	1	1	20
CT65-O-6K	6	2	2	40
CT65-O-15K	15	5	5	100
CT65-O-25K	25	10	10	200
CT65-O-30K	30	10	10	200
CT65-D-6K	3 6	1 2	1 2	20
CT65-D-15K	6 15	2 5	2 5	40
CT65-D-25K	15 25	5 10	5 10	100
CT65-D-30K	15 30	5 10	5 10	100