





Disconnect Terminal, Female

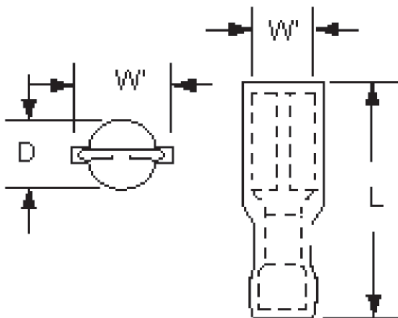

Specifications

| | |
|----------------------------|---|
| Barrel seam | : Butted with insulation grip |
| Max. Voltage Rating | : 600V building wire 1,000V signs or lighting fixtures (Luminaries) |
| Connector Type | : Female Disconnect |
| Insulator Colour | : Red |
| Termination Method | : Crimp |
| Stud/Tab Size | : 0.187" × 0.02" |
| Wire Size | : 22AWG to 18AWG |
| Max. Operating Temperature | : 221°F (105°C) |
| Max. Current | : Same as wire |
| Insulator material | : Nylon |
| Terminal material | : Brass |
| Insulation grip material | : Brass |
| Plating | : Tin |



-  Barrel crimp (Electrical)
-  Insulation crimp (Mechanical)

Suitable for factory installation on steel or brass tabs
 Suitable for field application on brass tabs, strain relief is required

Dimension Table

| Mates With Male Tab Range (AWG) | Width (W') × Thickness | L | W | D | Barrel Length | Barrel I D | Max. Insulation Diameter |
|---------------------------------|------------------------|------|-----|------|---------------|------------|--------------------------|
| 22-18 | 0.187 × 0.02 | 0.81 | 0.3 | 0.23 | 0.25 | 0.085 | 0.145 |

Dimensions : Inches

Disconnect Terminal, Female

Engineering Specification

Crimp-type female disconnects shall, electrically and mechanically, connect permanently to a prestripped end of a stranded copper wire, and have a tongue portion with fingers which grip a male disconnect in a separable, reusable manner, forming a quick connect wiring termination.

The connector line shall offer tongue variations (sized 0.187 × 0.020" ANSI / NEMA CD-2) and construction, non-insulated, vinyl insulated and nylon fully insulated, etc. The female disconnects shall have regulatory agency coverage.

The tongue portion shall be marked with the wire range and manufacturer's symbol (†).

The nylon fully insulated female disconnect, with insulation grip, shall be tin plated 0.016" thick brass with a tongue for gripping a 0.187 × 0.020" male tab per ANSI / NEMA CD-2 and a 0.25" long barrel with a tin plated brass funnel entry insulation grip, covered by a moulded nylon sleeve, which extends to cover the tongue, colour coded and sized for a specified (AWG) wire range (22-18).

Important Notice

Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use.

Part Number Table

| Description | Part Number |
|-----------------------------|-------------|
| Terminal, Female Disconnect | CFS-DF-1818 |

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.