




Datasheet

RS PRO AC AXIAL FAN 92×92×38mm, ALL METAL IP55

EN

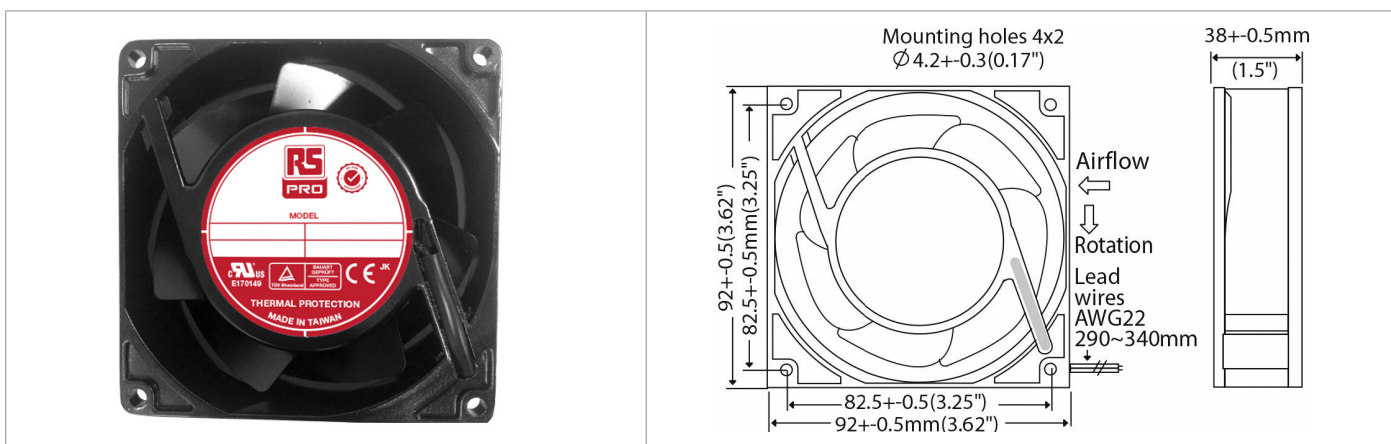

Frame	Diecast Aluminum	<u>Operating Temperature</u>	
Impeller	Metal Alloy	Ball Bearing -30C ~ +80C (non-condensing)	
Connection	2x Lead Wires 22 AWG or terminals	Storage Temp -40C ~ +100C	
Motor	Shaded pole, impedance protected	<u>Life Expectancy</u>	
Bearing System	Dual ball or Sleeve	Ball Bearing 50,000 hours (L10 at 55C)	
Insulation Resistance	>100M ohm between leadwire and frame (500VDC)	Environmental Protection IP55	
Dielectric Strength	> 1 min at 1500 VAC, 50/60Hz	Weight: ~ 0.50 kgs (1.1 lbs)	

Model Number	175-9813	175-9814
Connections	Wire Leads	Terminals
Speed (RPM)	2700 / 3150	2700 / 3150
Airflow (CFM)	45 / 55	45 / 55
Noise Level (dB)	40	40
Volts AC	230	230
Voltage Range	200-240	200-240
Watts	17 / 15	17 / 15
Max. Static Pressure	0.17" / 022" H ₂ O	0.17" / 022" H ₂ O
Curves	2 (50Hz) / 1 (60Hz)	2 (50Hz) / 1 (60Hz)