

XV613 PRODUCT DATASHEET


Copper X 4 Ply Medical Face Mask



PHYSICAL DIMENSION

DESIGN	FEATURES
Outer Layer	Hydrophobic Fluid Resistance (Antimicrobial Copper Coated)
Second Layer	Hydrophobic Fluid Resistance (Antimicrobial Copper Coated)
Third Layer	High Density Melt Blown Filter
Inner Layer	Moisture Absorbent Lint Free

4 Ply Mask Filter

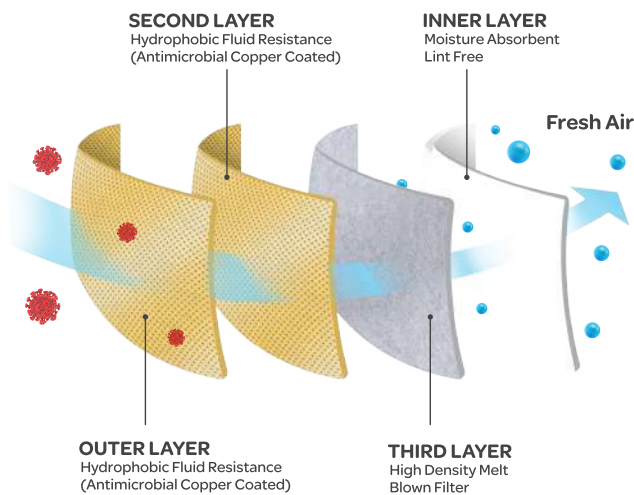

Product Specification & Instruction Use

PRODUCT SPECIFICATIONS:

Classification:

ASTM Level 3,
MDA No. : GA 43088421-58036

Product Material:

Copper Oxide Surface Coating and Lint Free Fabric

Packaging Mode:

30pcs/box (Individual Packaging)

Physical Features

- Hypoallergenic
- Antibacterial
- 4 Layers Protection
- Quad Fold

STORAGE:

- Store in dry, clean conditions in original packaging.
- Store away from direct sunlight, source of high temperature and solvent vapors.
- Store with the temperature range 0°C to 39°C.
- Shelf life is 60 months from the date of manufacture when stored as stated above.
- Replace if damaged or heavily contaminated.
- Dispose of contaminated face mask with care and in accordance with national regulations.

ASTM-F2100 MASK PERFORMANCE

LEVEL
3

BFE (%)	≥98
ΔP (mm H ₂ O/cm ²)	<6.0
PFE @0.1μ (%)	>99
Fluid Resistance (mmHg)	>160
Flammability	Class 1

Instruction:



1. Place loop over the ears.
2. Ensure coloured layer to face out.
3. Adjust nose piece for comfort fit.



Antibacterial



Ultimate Fitting



Individual Packing



Bergamot Sdn Bhd (1153028-V)
No 7 & 8, Jalan Sinaran 6,
Kawasan Perindustrian Sinaran,
43000 Kajang, Selangor,
Malaysia

info@bergamot.com.my

+603 8964 4186

