



## Pallet truck/Standard



### Integral-type pump

1. High reliability, suitable for variety of environments. It can be used for 3-5 years under normal maintenance
2. The first design of forging & casting integral pump, which prevents any loosening and leakage.
3. High-strength alloy steel carefully rafted, increased loading capacity
4. Set the active safety valve to prevent over loading of operation
5. Option: rubber wheel, Polyurethane wheel  
double(Nylon, polyurethane) wheel

Model		CBY20-II	CBY25-II	CBY30-II
Load capacity	kg	2000	2500	3000
Lift height	mm		190/200	
Min. Height	mm		75/85	
Outside fork spread	mm		520/550/685	
Fork length	mm		800/900/1000/1100/1150/1220	
Overall length	mm		1230/1330/1430/1530/1580/1650	
Steering Wheel	mm		Φ180×50/Φ200×50	
Load wheel	mm		Φ80×70/Φ80×74	
Turning radius	mm		1250	
Standard wheel			single Nylon wheel	
Package			6units packed one wooden pallet	



### Welding pump, with leaking proof design

1. With overloading safety valve
2. Chrome plate piston
3. Option: rubber wheel, Polyurethane wheel  
double(Nylon, polyurethane) wheel


Model		CBY20-III	CBY25-III	CBY30-III
Load capacity	kg	2000	2500	3000
Lift height	mm		190/200	
Min. Height	mm		75/85	
Outside fork spread	mm		520/550/685	
Fork length	mm		800/900/1000/1100/1150/1220	
Overall length	mm		1230/1330/1430/1530/1580/1650	
Steering Wheel	mm		Φ180×50/Φ200×50	
Load wheel	mm		Φ80×70/Φ80×74	
Turning radius	mm		1250	
Standard wheel			single Nylon wheel	
Package			6units packed one wooden pallet	



## Pallet truck/Special

### Pallet Truck Quick Lift

1. the fork could be raised to the Maximum Height in 5 times of handle operation.
2. The integral-type pump body contains hydraulic circuit and hydraulic oil tank, which ensures the entire hydraulic system completely sealed and solves the common problem of oil leaking
3. Professional designed quick lift hydraulic system, it can reach the highest volumetric efficiency.

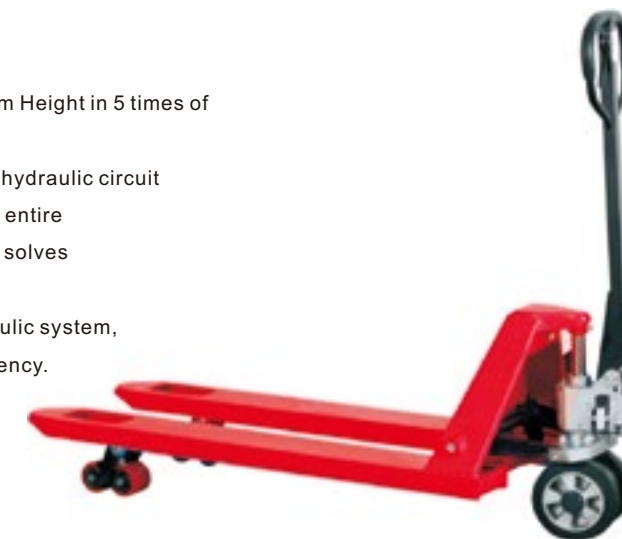

Model		EP20Q	EP25Q
Load capacity	kg	2000	2500
Lift height	mm		190/200
Min. Height	mm		75/85
Outside fork spread	mm		520/550/685
Fork length	mm		800/900/1100/1150/1220
Overall length	mm		1230/1330/1430/1530/1580/1650
Steering Wheel	mm		Φ180×50/Φ200×50 nylon/polyurethane/rubber
Load wheel	mm		Φ80×70/Φ74×70 single/tandem nylon(polyurethane)
Turning radius	mm		1250
Package			6units packed one wooden pallet

### Low profile pallet truck

Option: polyurethane wheel, double(Nylon, polyurethane) wheel



Model		EP10L	EP15L	EP20L
Load capacity	kg	1000	1500	2000
Lift height	mm	85	135	135
Min. Height	mm	35	51	51
Outside fork spread	mm		520/685	540/685
Fork length	mm		1150/1220	1150/1220
Overall length	mm		1430/1530	1547/1617
Steering Wheel	mm	Φ140×54	Φ180×50	Φ150
Load wheel	mm	Φ34×58	Φ51×60	Φ58
Turning radius	mm		1250	
Standard wheel			single Nylon wheel	
Package			6units packed one wooden pallet	