




ENGLISH

Datasheet

RS PRO SLIM USB2.0 A-B FRONT MOUNTING FT CONNECTOR

Stock No: 2188309, 2188311

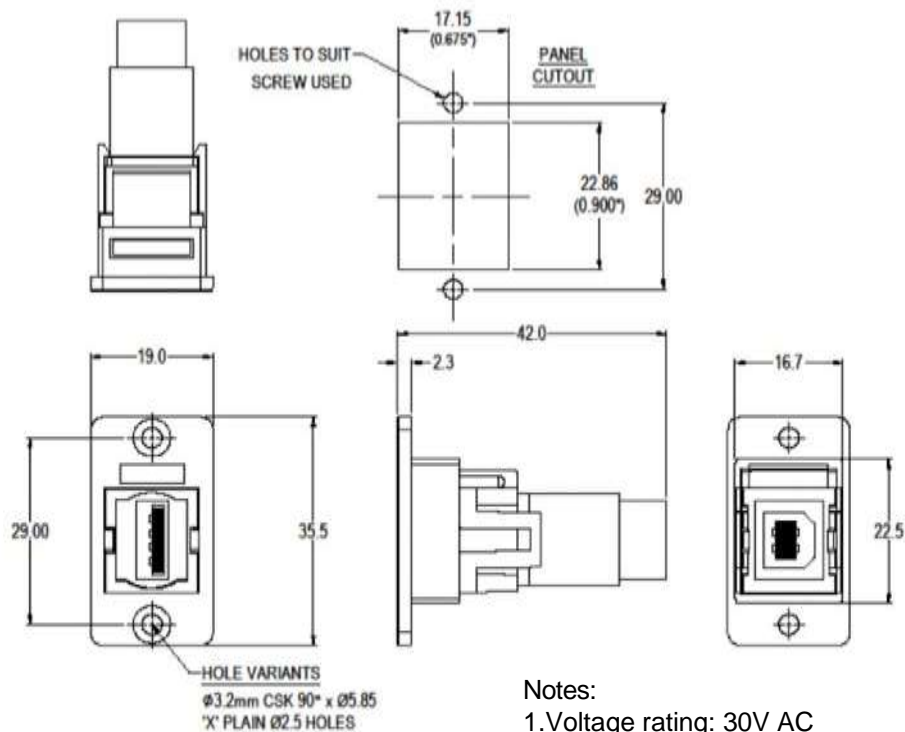

Material:

- 1.Insert: ABS
- 2.Frame: Polyamide UL94 V-2
- 3.Shell: Nickel plated steel
- 4.Contacts: Gold Plated

Notes:

- 1.Voltage rating: 30V AC
- 2.Current rating: 1.5 A max
- 3.Contact resistance: 50mΩ max
- 4.Insulation resistance: 20MΩ min
- 5.Dielectric withstanding voltage: 500V AC
- 6.Operating Temperature: -20°C to 50°C

rspro.com

Features & Benefits:

- Fits standard rectangular cutout.
- Various hole mounting options
- No soldering or punch termination. Use standard cable for each connector style.
- Low rear profile.

General:

Please note: Functionality is affected by cable quality, length and cable wiring configuration.

Other models available:

Part No.

2188309 **FM SLIM FT USB2.0 A-B Black plastic frame, CSK holes**

2188311 **FM SLIM FT USB2.0 A-B Black plastic frame, Ø2.5 PLAIN holes**



rspro.com

