


# Datasheet

## Prototyping board

RS Stock number 100-4334

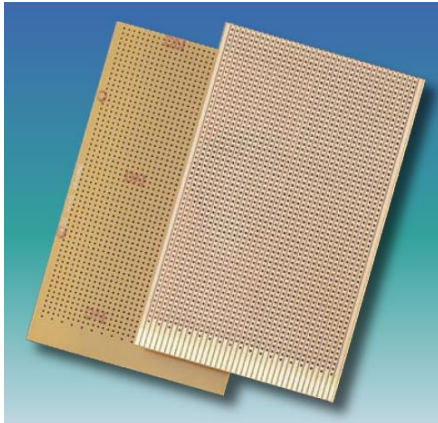

### Description

This board combines the unique Veroboard pattern with the 37 way 2,54mm pitch direct edge connector. Intended primarily for hard wiring of discrete components it is equally useful where a number of common bus or signal lines are required.

### Features

- Ideal for hard wired applications
- 37 way 2,54mm pitch gold plated tongue

### Board Specifications

- Board type Epoxy glass
- Base material SRBP
- Single sided copper BS4584 part 16
- Max. working temp. 155oC
- Nom. board thickness (inc. copper) 1,6mm
- Copper thickness 35µm or 1oz/ft2 or 305g/m2

Dimensions	Tracks	Holes per track	Base material
100 x 160	37	57	SRBP

*Note: hole grid 2,54 x 2,54mm Hole dia. 1,02mm Contact pitch 2,54mm*