



DWG NO.

201610002

REV	DESCRIPTION	BY	DATE
A	CREATED	CPA	11/10/16


CONFIDENTIAL DOCUMENT! THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CIE-GROUP LTD. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF CIE-GROUP LTD IS PROHIBITED.
 The cable assy should comply with the European Parliament and the Council Directive : 2011/65/EU for the restriction of hazardous substances (ROHS) . The manufacturer will provide a certification proving the ROHS compliance of the cable assy whenever customer requires such.



± 0.2mm

Colour Code:

- 1 - White & Orange
- 2 - Orange
- 3 - Green & White
- 4 - Blue
- 5 - Blue & White
- 6 - Green
- 7 - Brown & White
- 8 - Brown

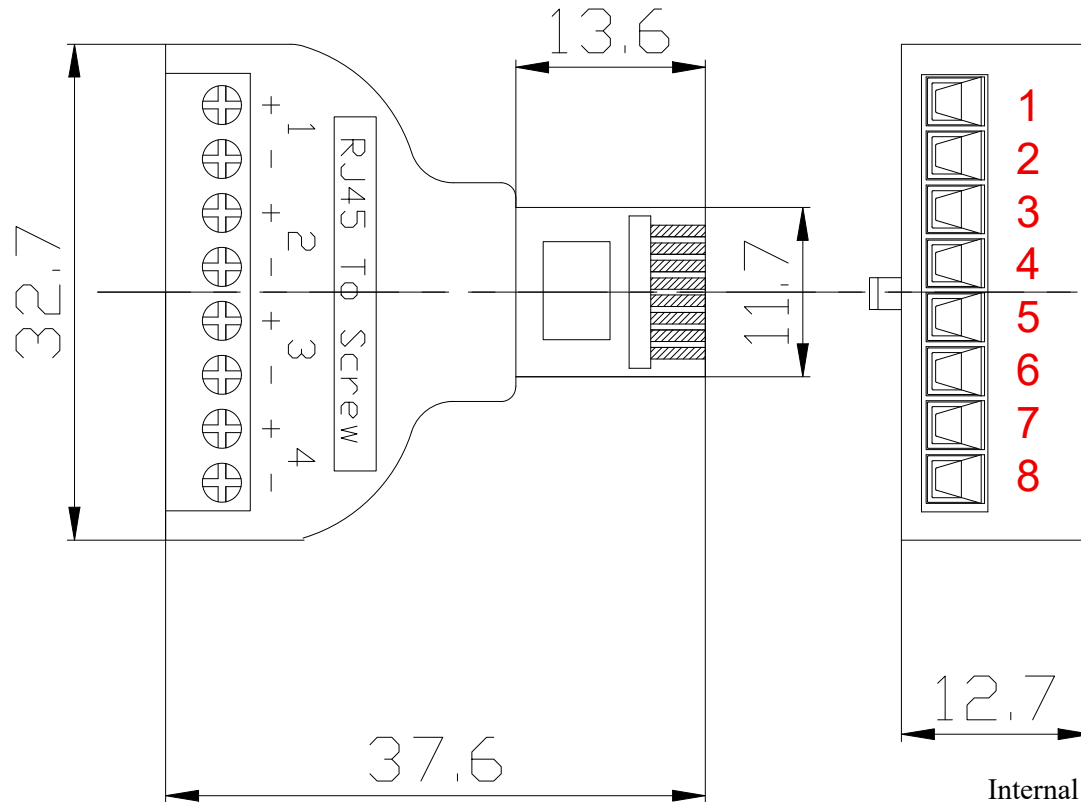

Internal impedance per pin: 0.3~0.4Ω

The material of the black shell: ABS
 Fire rating: UL 94-V0
 Operating temperature range: -25°C ~+60°C
 Voltage rating: 1-24V
 Current rating: 800mA
 Pitch of PINS: 3.5mm
 Thickness of gold plating: 1.5µm

TOLERANCES .XXX ±.025mm .XX ±.100mm .X ±.250mm Wire Length 0-100 ±5mm 101-300 ±10mm 301-500 ±15mm 501-<1000 ±20mm 1000-<2000 ±50mm 2000+ ±100mm	TITLE:	RS PRO 8-Port RJ45, Terminal Block Adapter, Nickel Plated				
	P/N:	124-2520				
	Certificate	Rohs Compliant				
SHEET	PROJECTION	UNIT	DRAWN	VERIFIED	APPROVED	
1 OF 1		MM				