



ENGLISH

Datasheet

Stock No: 251-8660

RS Pro W82972 Series, 2.54mm Pitch 72 Way 2 Row Right Angle PCB Header, Solder Termination



Product Details

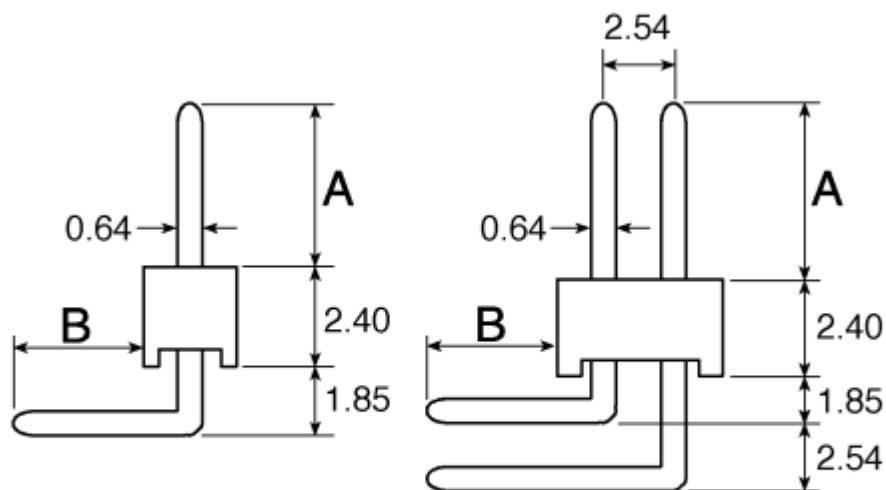
90° Headers

Various pin heights and PCB tail lengths
Can be snapped to desired length

| | |
|-------------------|-----------------------|
| Current Rating | 1 A max |
| Temperature Range | -55° C to +125 ° C |
| Pin Material | Tin Plated Brass |
| Insulation | PBT 30% Glass UL94V-0 |
| Pin Size | 0.64mm Square |

Specifications:

| | |
|--------------------|-------------------|
| Number of Contacts | 72 |
| Pitch | 2.54mm |
| Number of Rows | 2 |
| Type | Unshrouded Header |
| Body Orientation | Right Angle |
| Termination Method | Solder |
| Series | W82972 |

Dimensions:**2.54mm PCB Connector RS Range**

A large variety of connector options, to cover the majority of board-to-board, bussing and programming requirements.