


## Datasheet

# RS 15 Way Straight Through Hole Mount PCB D-sub Connector, Plug

RS Stock [472-770](#)

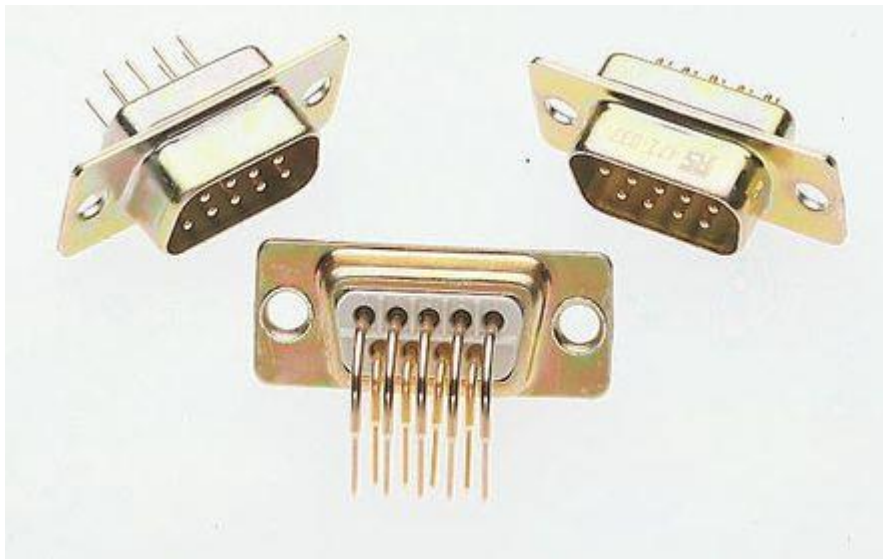

## Specifications

Conforms to BS9523 F0010 and F0018

Standards RS232 interface

Bright tin finish and grounding indents available for EMI/RFI shielding

Meets dimensional requirements of MIL-C-24308, BS9523 F0018 and DIN 41652

UL 94V-0 rated insulators

Compatible with all other D Subminiatures

Machined contacts



## Specifications / Technical Data

Shell material: Steel

Shell finish: Zinc plate,

Yellow colour passivated

Insulator material: Glass filled polyester

Insulator rating: UL 94 V-0

Contact material: Copper alloy

Contact plating: 0.2 $\mu$ m gold

Current rating: 5A

Voltage rating: 750Vac pk

Contact resistance (max.): 5m $\Omega$

Insulation resistance (min): 106 M $\Omega$

Temperature range: -55°C to +125°C

Mating cycles: 250