


NO	DESCRIPTION	DATE
△	DEL PROOF VOLTAGE WORKING VOLTAGE → VOLTAGE RATING	05.06.13'
△	6.0 → 6.5 ,8.0 → 8.5	09.19.16'

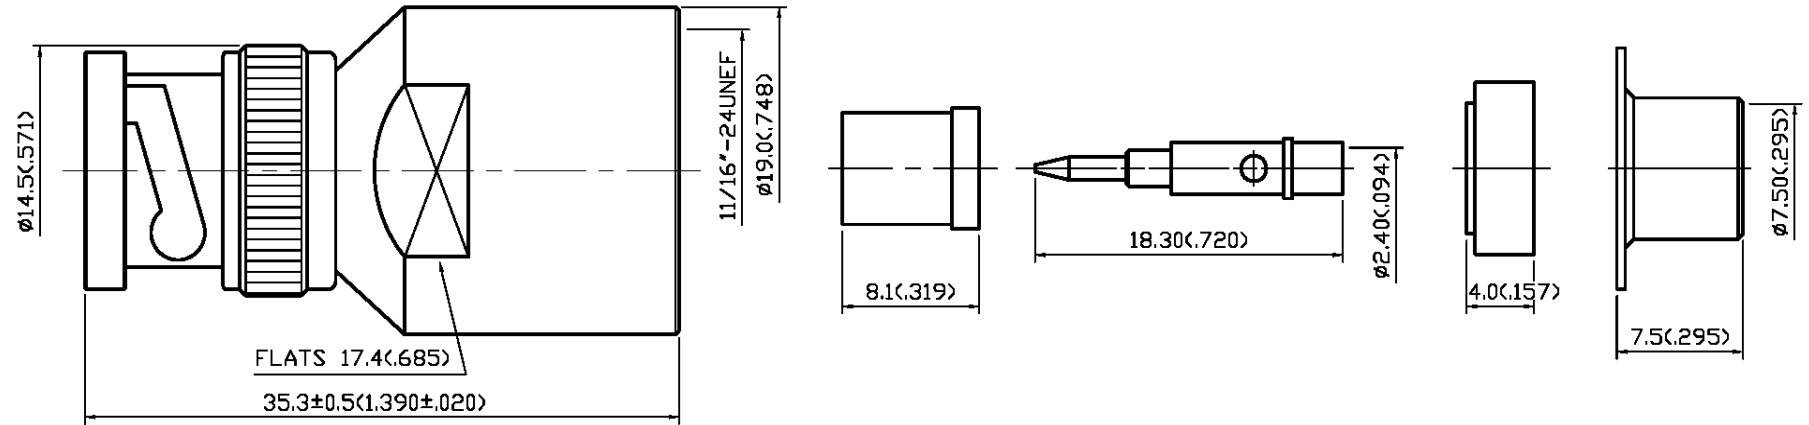

1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC-4 GHz
- 1.2 NOMINAL IMPEDANCE: 50 OHMS
- 1.3 VOLTAGE RATING: 500 VOLTS MAX. △
- 1.4 VSWR: 1.3 MAX.

2.0 MATERIALS

- 2.1 BODIES: BRASS PER JIS-C3604
- 2.2 CENTER CONTACT: BRASS PER JIS-C3604
- 2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710

3.0 FINISHES AND OTHERS

3.1 SEE BELOW TABLE FOR DETAILS.



4.0 MECHANICAL

- 4.1 INTERFACE IN ACCORDANCE WITH: MIL-STD-348A
- 4.2 FOR USE WITH RG213U OR SIMILAR STYLE CABLE
- 4.3 CABLE ATTACHMENT: OUTER: CLAMP, INNER: SOLDER

5.0 ENVIRONMENTAL

5.1 OPERATING TEMPERATURE RANGE: -65° C TO +165° C

13	NUT	BRASS	1	SILVER 70 μ" MIN.
12	BODY	BRASS	1	SILVER 70 μ" MIN.
11	WASHER	BRASS	1	SILVER 70 μ" MIN.
10	GASKET	SILICONE	1	RED
9	BRAID CLAMP	BRASS	1	SILVER 70 μ" MIN.
8	INSULATION	TEFLON	1	NONE
7	WASHER	BRASS	1	SILVER 70 μ" MIN.
6	SPRING WASHER	SK-5	1	NICKEL
5	WASHER	BRASS	1	NICKEL
4	GASKET	SILICONE	1	RED
3	CENTER CONTACT	BRASS	1	SILVER 70 μ" MIN.
2	INSULATION	TEFLON	1	NONE
1	SHELL	BRASS	1	SILVER 70 μ" MIN.
NO	DESCRIPTION	MATERIAL	Q'TY	FINISH

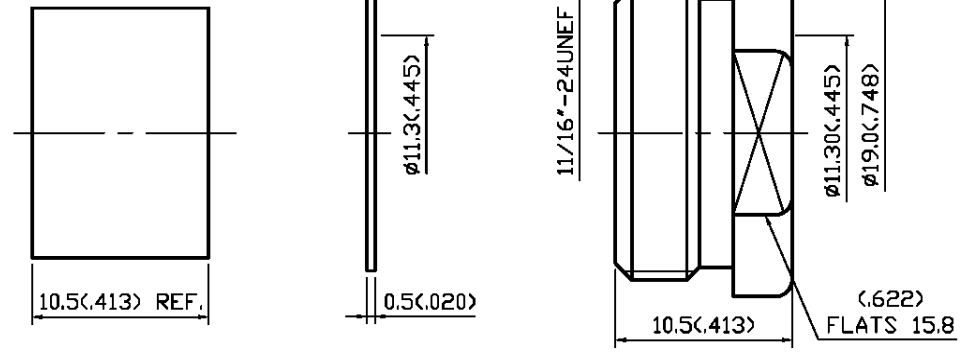

APPROVED by _____ DATE: _____



DESCRIPTION		BNC STRAIGHT PLUG CLAMP						
製圖	DRAWN	TOLERANCE	品名	13-04-8 T.S.S 213U	日期	DATE	版次	REV.
	Yoko		TITLE	\ROHS COMPLIANT (50Ω)	11.15.99'	B-2		
檢圖	CHECK	X ±0.2	單位	DWG.NO.	13-0302(13-004-08-04)			
	Arc							
認定	APPROVAL	.XXX ±0.05	比例					
	Angela							