

Datasheet

Insulated Male Crimp Bullet Connector, 12 → 10 AWG, 5mm Bullet diameter, Yellow

RS Stock number [534-935](#)



Specifications:

1. Maximum Electric Rating: 75°C 300V

最高溫度: 105°C 耐壓 300V

2. Maximum Electric Current: (最大電流)

22-16AWG / 0.5-1.5mm²: 10A

16-14AWG / 1.5-2.5mm²: 15A

12-10AWG / 4-6mm²: 24A


3. Terminal Body: Brass (端子材質: 黃銅)

4. Insulation: Pvc (護套材質: Pvc)

5. Plating: Tin (表面處理: 鍍錫)

VM---Flared Vinyl without copper sleeve

PIPG---Pre-insulated funnel Vinyl insulator with easy entry copper sleeve

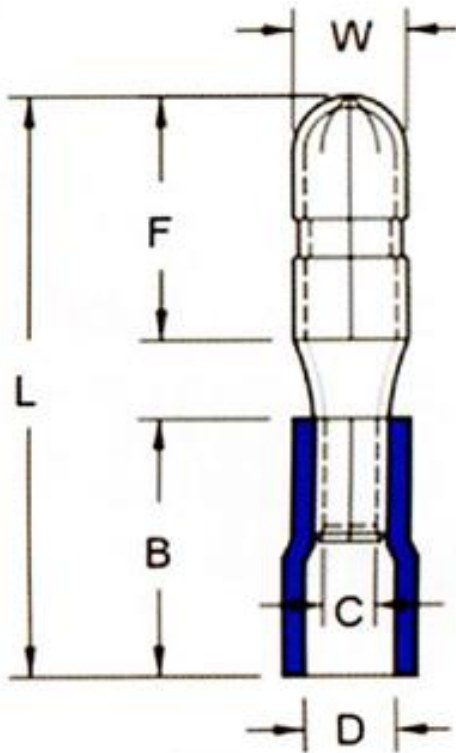

Insulation Colour	Wire Range Mm ² /Awg	Dimension (mm)	Tab Size
Yellow	4-6mm ² /12-10AWG	5.0/9.0/25.0/13.0/5.5/3.5/0.4	.032*.110