

## FEATURES

- For all corrosive fluids and environment
- Mechanical strength
- Operating temperature range is from - 60 °C to + 300 °C

# RS PRO T CONNECTOR 8 AISI316L

RS Stock No.: 2312719



RS PROfessionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

## Product Description

The RS PRO T connector 6 is made up of stainless steel 316L. It is a perfect solution for multiple application and connection, it's possible to connect with several rigid metallic tube in complete safety (stainless steel, brass, aluminum, copper) but also plastic made tubes like polyurethane, polyamide, Teflon.

It is RoHS and REACH compliant. It has operating temperature range from - 60 °C to + 300 °C.

## General Specifications

<b>Fitting Type</b>	Tee
<b>Material</b>	Brass
<b>Fitting Direction</b>	Tee
<b>Application</b>	Compressed Air, Pneumatic Automation, Industrial water circuits, Inert Gases, Fluids, Steam Vacuum

## Mechanical Specifications


<b>Pipe Fitting Connection Type</b>	Threaded
<b>Connection 1</b>	M14 Metric Female
<b>Connection Gender 1</b>	Female
<b>Thread Size 1</b>	M14
<b>Thread Standard 1</b>	Metric
<b>Connection 2</b>	M14 Metric Female
<b>Connection Gender 2</b>	Female
<b>Thread Size 2</b>	M14
<b>Thread Standard 2</b>	Metric
<b>Connection 3</b>	M14 Metric Female
<b>Length 1</b>	51mm
<b>Length 2</b>	25.5mm
<b>Wrench Size</b>	12mm

## Operation Environment Specifications

Temperature	<b>Min.</b>	<b>Max.</b>
	- 60 °C	+ 300 °C

## Approvals

Approvals	RoHS and REACH compliant
-----------	--------------------------

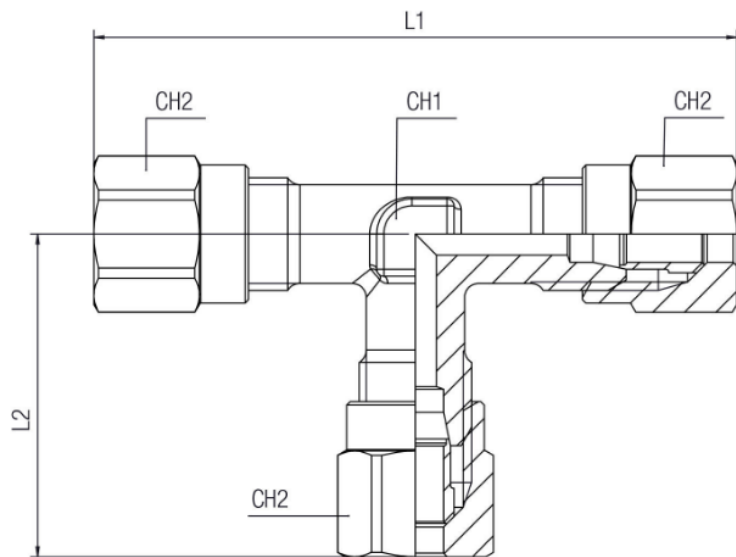

Tube	L1	L2	CH1	CH2	Pack
8	51	25.5	12	14	2