



Application

- Home Shopping Mall School
- Hospital Conference Room

[illegible]

Technical Specifications	
CRI	80
Colour Consistency (SDCM)	≤ 6
Dimmable	No
Housing Colour	White
IP	IP20
IK	IK02
Driver integrated (Yes/No)	Yes


Electrical Supply	
Frequency (Hz)	50/60Hz
Voltage (V)	220V-240V
AC/DC	AC

Mechanical Properties	
Optical Material	PP
Housing Material	PC


Application Conditions	
Operating Temperature	-20°C~40°C
Application Temperature	20°C
Storage Environment	-20°C~40°C

Photometric Data


9W




12W




15W




18W



22W



Dimensional Drawing

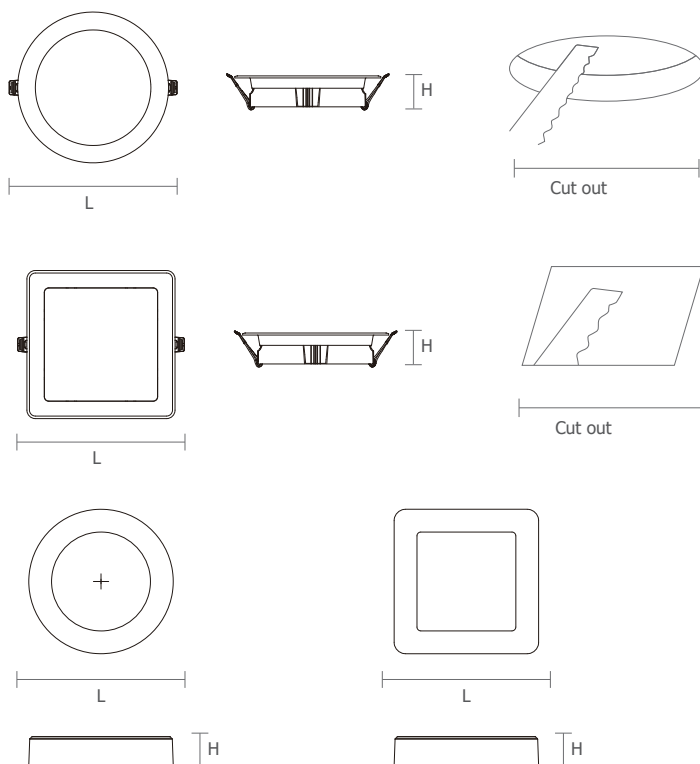

Model	L(mm)	H(mm)	Cut out(mm)
MQTL1119-Y-15W-R150	Ø175	30	Ø150
MQTL1119-Y-18W-R175 V2	Ø200	30	Ø175
MQTL1119-Y-18W-R200	Ø225	30	Ø200
MQTL1119-Y-22W-R200 V2	Ø225	30	Ø200
MQTL1119-F-9W-S100	125	30	100*100
MQTL1119-F-12W-S125	150	30	125*125
MQTL1119-F-15W-S150	175	30	150*150
MQTL1119-F-22W-S200 V2	225	30	200*200
MQTL1119-Y-R150-SM KIT V1	Ø190	43	/
MQTL1119-Y-R200-SM KIT V1	Ø235	43	/
MQTL1119-F-S150-SM KIT V1	190	43	/
MQTL1119-F-S200-SM KIT V1	235	43	/