




Product Datasheet

ENGLISH

# Polyamide Terminal Blocks with Horizontal Plug

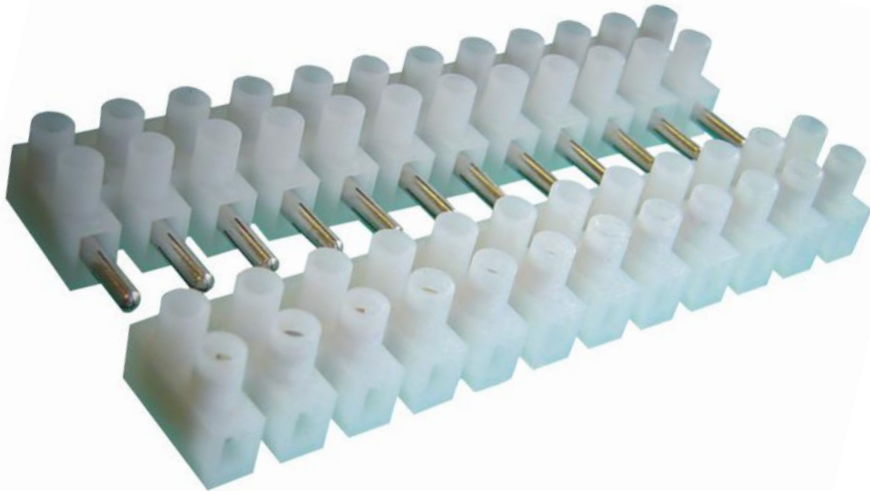

## Specification

**HOUSING:** POLYAMIDE (PA 66)

**INSERTS:** NICKEL PLATED BRASS

**SCREWS:** GALVANISED STEEL

**TEMP.:** 105°C

**COLOR:** NATURAL

**Standard:** VDE & MULTI-APPROVALS

## Features:

SEMI-RIGID;


FLAME RETARDANT;;

HIGH TEMPERATURE;

ALL SCREWS ARE CAPTIVE & RAISED  
FOR EASY WIRING



**Dimensions**

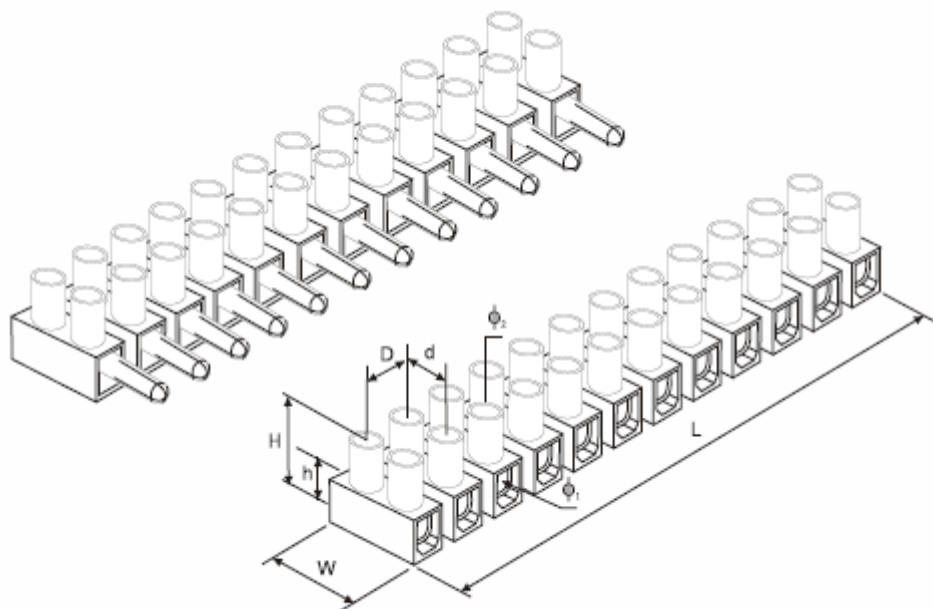

RS CODE	CROSS SECTION	CURRENT RANGE	RATED VOLTAGE	DIMENSIONS (mm)							
				W	L	Φ1	Φ2	D	d	H	h
8659821	2.5 mm <sup>2</sup>	2.5~20A	450V	18	94	2.8	2.5	7.2	5.6	13	7
8659830	4 mm <sup>2</sup>	3~24A	450V	20	115	3.5	3.2	10	8	15	8
8659833	6 mm <sup>2</sup>	5~32A	450V	24	138	4.2	3.5	12	9.5	19	10

**Cross Section:** rated for rigid wire and cables (if for flexible wire, it should be reduced one-step, i.e. 6mm<sup>2</sup> is 4mm<sup>2</sup>)  
**Φ1** wire entry hole diameter    **Φ2** fixing hole diameter