
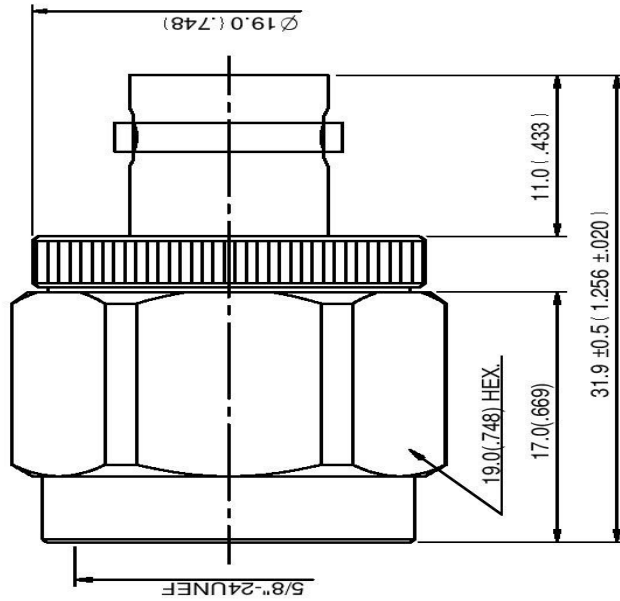


Datasheet

Stock No:1707011

RS Pro STRAIGHT N PLUG- BNC JACK ADAPTER



1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC - 6GHz
- 1.2 NOMINAL IMPEDANCE: 75 OHMS
- 1.3 VOLTAGE RATING: 50 VOLTS MAX.
- 1.4 VSWR: 1.2 MAX.

2.0 MATERIALS

- 2.1 BODIES: BRASS PER JIS-C3604
- 2.2 CENTER CONTACT: BERYLLIUM COPPER PER ASTM B196 UNS C1730
- 2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710

3.0 FINISHES AND OTHERS

- 3.1 SEE BELOW TABLE FOR DETAILS.

4.0 MECHANICAL

- 4.1 INTERFACED IN ACCORDANCE WITH: MIL-STD-348B

5.0 ENVIRONMENTAL

- 5.1 OPERATING TEMPERATURE RANGE: -65 C TO +165 C

APPROVED by DATE: -----

NO	DESCRIPTION	MATERIAL	QTY	FINISH
8	INSULATION	TEFLON	1	NONE
7	INSULATION	TEFLON	1	NONE
6	CENTER CONTACT	BERYLLIUM COPPER	1	GOLD 3 μ" MIN.
5	WASHER	BRASS	1	NONE
4	BODY	BRASS	1	NICKEL 100 μ" MIN.
3	GASKET	SILICONE	1	NONE
2	SHASSIS	BRASS	1	NICKEL 100 μ" MIN.
1	SHELL	BRASS	1	NICKEL 100 μ" MIN.

DESCRIPTION	TOLERANCE	品名	品名	DATE	REV.
STRAIGHT N PLUG - BNC JACK ADAPTER	±0.2	40111001300009	日期	11.29.17	A-0
製圖	X	TITLE	(75 Ω)		
檢圖	.XX	單位	DWG.NO.	11-0346-Z	
認圖	.XXX	出例	SCALE		
	ANGLE ±5°	例	3:1		