

Features

- All data at 25°C unless otherwise specified
- Operating temperature ranges between -20°C and 70°C
- Operating voltage ranges between 6V and 12VDC
- Wave solder and wash not allowed

RS PRO Piezo Transducer with Feedback Lead

RS Stock No.: 188-1766



RS PRO Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO 9VDC piezo buzzer with feedback lead has a diameter of 40mm and a resonant frequency of 3200HZ. This black transducer has a single tone length.

General Specifications

Rated Voltage (VDC)	9VDC
Rated current at rated voltage	≤30mA
Sound output at 2400Hz at 10cm	≥110dB
Resonant frequency	3200 ± 500Hz
Storage temperature	-20~+85°C 5g
Weight	Single
Features and notes	<ul style="list-style-type: none">• Wave solder & wash not allowed• All data at 25°C unless otherwise specified



Operating Environment Specifications

Operating voltage	6~12VDC
Operating temperature	-20~+70°C

Approvals

Standards/ Compliance	RoHS compliant
-----------------------	----------------

Unless otherwise specified, tolerance:±0.5(unit:mm)

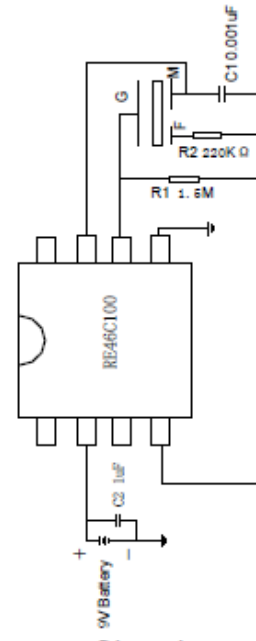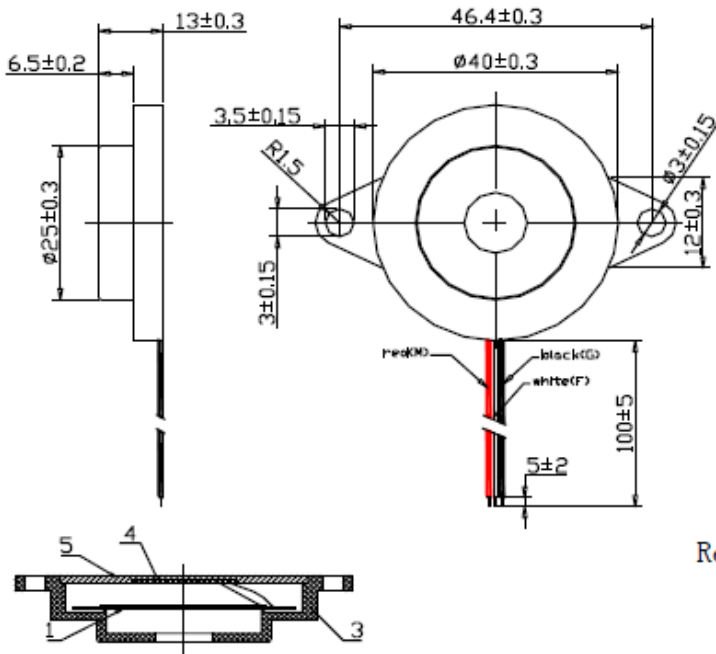

Reference Circuit

No.	Part Name	Qty	Material
5	Cover	1	BLACK ABS777D
4	PCB	1	Epoxy Board
3	Housing	1	BLACK ABS777D
2	Lead wire	3	UL1095 AWG28 (Red, White & Black)
1	Piezo element	1	Stainless steel