


## Datasheet

# Feed Through Terminal Block

RS Stock number 762-2503

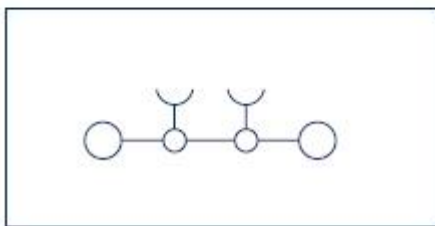

Feed-through terminal  
2 connections

### Features

- Foot can be snapped on TS 35 DIN rail
- Housing made from polyamide 6.6 UL 94-V0

### Specifications:

Rated wire cross-section, mm<sup>2</sup> | AWG: 2.5 | 22-12

Rated impulse voltage, kV | Contamination degree: 8 | 3

Plug gauge acc. to EN 60 947-1 | Flamm. class acc. to UL 94: A3 | V0

### Connection data

Single wire (solid) / Stranded mm<sup>2</sup>: 0.2-4 | -

Stranded/stranded (w/ferrules acc. to DIN 46 228/1) mm<sup>2</sup>: 0.2-4 | 0.2-2.5

Contact wire range, mm<sup>2</sup>: 0.2-4

Stripping length, mm: 10

Torque, Nm | Screw: 0.4-0.8 | Slotted M 2.5