



EN

## Datasheet

# RS PRO HEAT SHRINKABLE-CHANGING DOWN BUTT SPLICE CONNECTORS “HT” (TUBULAR TYPE)

Stock number: 178-7188

### MAXIMUM ELECTRIC CURRENT:

A.W.G.	22	20	18	16
AMP.	9	12	17	18

MAXIMUM ELECTRICAL RATING: 600 VOLTS MAX.


SHRINK TEMP. : 150° C

OPERATING TEMP. : -40° C~+105° C

INSULATION MATERIAL: HIGH DENSITY PE

TERMINAL MATERIAL: COPPER TUBULAR

INSULATION COLOR: BLUE WITH RED COLOR RING

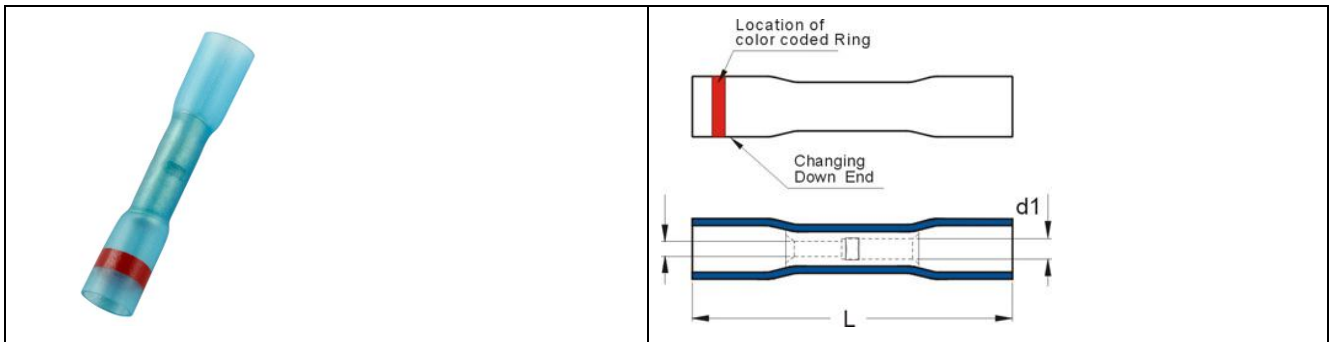

WIRE RANGE A.W.G. mm <sup>2</sup>	ITEM NO.	DIMENSION inch(mm)			INSULATED COLOR
		d1	d2	L	
16-14 to 22-16 A.W.G.	178-7188	0.091	0.087	1.417	BLUE WITH RED COLOR RING
1.5-2.5 to 0.5-1.5 mm <sup>2</sup>		2.300	1.700	36	