


Industrial torque wrench 3/4" - 265

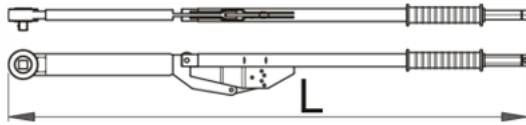

Description

- robust construction gives accurate results, to +/-4% , even in arduous working conditions.
- every wrench supplied with a calibration certificate according to ISO 9000:2000
- the large break angle improves accuracy by reducing the possibility of over torquing
- Cam control of the mechanism gives a controlled break which will not throw the operator off balance
- Torque application: bothway, but always apply in direction specified on torque wrench handle
- dual scaled, N.m and lbf.ft
- made according to standard ISO 6789

Usage

- agricultural equipment
- building sector
- heavy industry
- larger construction machinery
- shipbuilding industry
- aircraft industry
- Do not use torque wrench for untightening!

Important!

- Tool must be used with equal pulls and in accordance with the instructions in the manual.
- Torque tightens only in the direction showed on the key sticker! Sticker shows the proper direction of tightening!
- The default calibration interval of the torque wrench is 12 months or 5.000 measurements from the date of end user purchase.
- ALWAYS set the measuring mechanism to starting point, at the end of work.
- When the requested torque are reached, please do not tight any more.
- Torque wrench can be damaged, if manual instructions are not considered.

Technical Data

Barcode	Color	Nm	lbf.ft	Lenght	Weight	Box	Carton	
616801	3/4"	150 - 700	100 - 500	1090	8500	1S	1	-
616802	3/4"	200 - 800	150 - 600	1140	9000	1S	1	-
616803	3/4"	300 - 1000	200 - 750	1470	11000	1S	1	-

Packaging data

Barcode	Color	Retail tool packaging			Weight	Hand	Transport package			
		Retail packaging in mm (length)	Retail packaging in mm (width)	Retail packaging in mm (height)			Transport packaging in mm (length)	Transport packaging in mm (width)	Transport packaging in mm (height)	Weight
616801	3/4"	230	1300	95	8500	1	230	1300	95	8500
616802	3/4"	230	1300	95	9000	1	230	1300	95	9000
616803	3/4"	230	1470	95	11000	1	230	1470	95	11000