XVGB3ST

Tower Light - RAG - 24V - LED - W. Buzzer - Direct tube mounting





Main

Range of product	Harmony XVG
Product or component type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	3 illuminated units
Material	PC (UL94 V-2): globe ABS (UL94HB): tube body Aluminium: tube
Mounting diameter	60 mm
Component name	XVG
Device mounting	Direct tube mounting
Light source	LED steady red LED steady green LED steady amber
Light block color	Red/orange/green
Indicator bank base type	Base with integrated buzzer

Complementary

ole cross section 0.33 mm² crete output type PNP and NPN np] rated impulse withstand voltage 0.5 kV rent consumption 180 mA		
crete output type PNP and NPN np] rated impulse withstand voltage 0.5 kV rent consumption 180 mA	Rated supply voltage	24 V AC/DC
rent consumption 0.5 kV rent consumption 180 mA	Cable cross section	0.33 mm ²
rent consumption 180 mA	Discrete output type	PNP and NPN
·	[Uimp] rated impulse withstand voltage	0.5 kV
se level 85 dB	Current consumption	180 mA
	Noise level	85 dB
ver consumption in W 4.1 W	Power consumption in W	4.1 W
damental frequency 2.64 kHz	Fundamental frequency	2.64 kHz
weight 0.4 kg	Net weight	0.4 kg

Environment

Product certifications	CE[RETURN]EAC
Ambient air temperature for storage	-3570 °C
Ambient air temperature for operation	-1050 °C
IP degree of protection	IP23

Packing Units

Unit Type of Package 1	PCE	
Number of Units in Package 1	1	
Package 1 Height	8.3 cm	
Package 1 Width	14.2 cm	
Package 1 Length	55.3 cm	
Package 1 Weight	590.0 g	
Unit Type of Package 2	S04	
Number of Units in Package 2	8	
Package 2 Height	30 cm	
Package 2 Width	40 cm	
Package 2 Length	60 cm	

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not interested for a set of for determining suitability or intelability of these products for specific user applications. It is the documentation is not integrator to perform the appropriate and complete risk analysis, evaluating of the products with respect to the relevant specific application or use thereof. Neither Schmeider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Package 2 Weight	3.94 kg	
Unit Type of Package 3	P06	
Number of Units in Package 3	30	
Package 3 Height	72 cm	
Package 3 Width	60 cm	
Package 3 Length	80 cm	
Package 3 Weight	26 kg	


Offer Sustainability

Sustainable offer status	Green Premium product
REACh Regulation	REACh Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	☑ China RoHS Declaration
RoHS exemption information	₫Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	☑ End Of Life Information

Contractual warranty

Warranty	18 months	


Dimensions

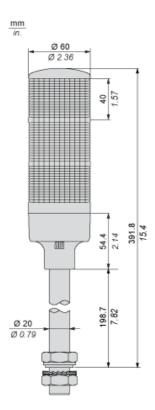


Product data sheet Mounting and Clearance

XVGB3ST

Mounting



Wiring



- (1) "ON" for lighting and/or applying continuous sound.(2) Fuse (rated current: 0.5 A)
- RD: Red YE: Yellow GR : Green GY : Grey OR : Orange BK: Black