

1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC-1 GHz
- 1.2 NOMINAL IMPEDANCE: 75 OHMS
- 1.3 VOLTAGE RATING: 500 VOLTS MAX.
- 1.4 VSWR: 1.3 MAX.

2.0 MATERIALS

- 2.1 BODIES: BRASS PER JIS-C3604
- 2.2 CENTER CONTACT: BRASS PER JIS-C3604
- 2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710

3.0 FINISHES AND OTHERS


- 3.1 SEE BELOW TABLE FOR DETAILS.

4.0 MECHANICAL



- 4.1 FOR USE WITH URM70 OR SIMILAR STYLE CABLE
- 4.2 CABLE ATTACHMENT: OUTER: CLAMP, INNER: SOLDER

5.0 ENVIRONMENTAL

- 5.1 OPERATING TEMPERATURE RANGE: -65° C TO +165° C



STRIPPING DIMENSION

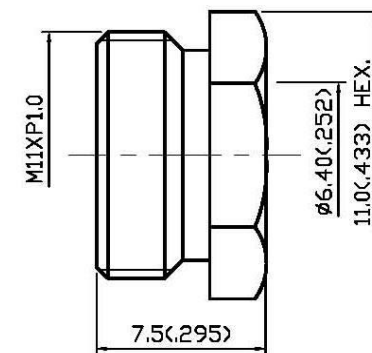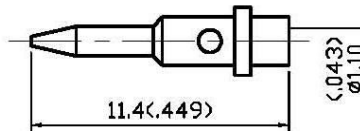

13	NUT	BRASS	1	SILVER 70 μ" MIN.
12	BODY	BRASS	1	SILVER 70 μ" MIN.
11	WASHER	BRASS	1	SILVER 70 μ" MIN.
10	GASKET	SILICONE	1	RED
9	BRAID CLAMP	BRASS	1	SILVER 70 μ" MIN.
8	INSULATION	TEFLON	1	NONE
7	WASHER	BRASS	1	SILVER 70 μ" MIN.
6	SPRING WASHER	SK-5	1	NICKEL
5	WASHER	BRASS	1	NICKEL
4	GASKET	SILICONE	1	RED
3	CENTER CONTACT	BRASS	1	SILVER 70 μ" MIN.
2	INSULATION	TEFLON	1	NONE
1	SHELL	BRASS	1	SILVER 70 μ" MIN.
NO	DESCRIPTION	MATERIAL	Q'TY	FINISH

APPROVED by _____ DATE: _____



DESCRIPTION		BNC STRAIGHT PLUG CLAMP	
製圖	DRAWN <i>Kristina</i>	TOLERANCE .X ±0.2	品名 13-04-5 T.G.N URM70
檢圖	CHECK <i>Ivan</i>	.XX ±0.1	DATE 08.15.13
認定	APPROVAL <i>Angela</i>	.XXX ±0.05	版次 A-0
	ANGLE ±5°	比例 4:1	UNIT mm(in)
			DWG.NO. 13-0522
			TITLE ROHS COMPLIANT (75Ω)