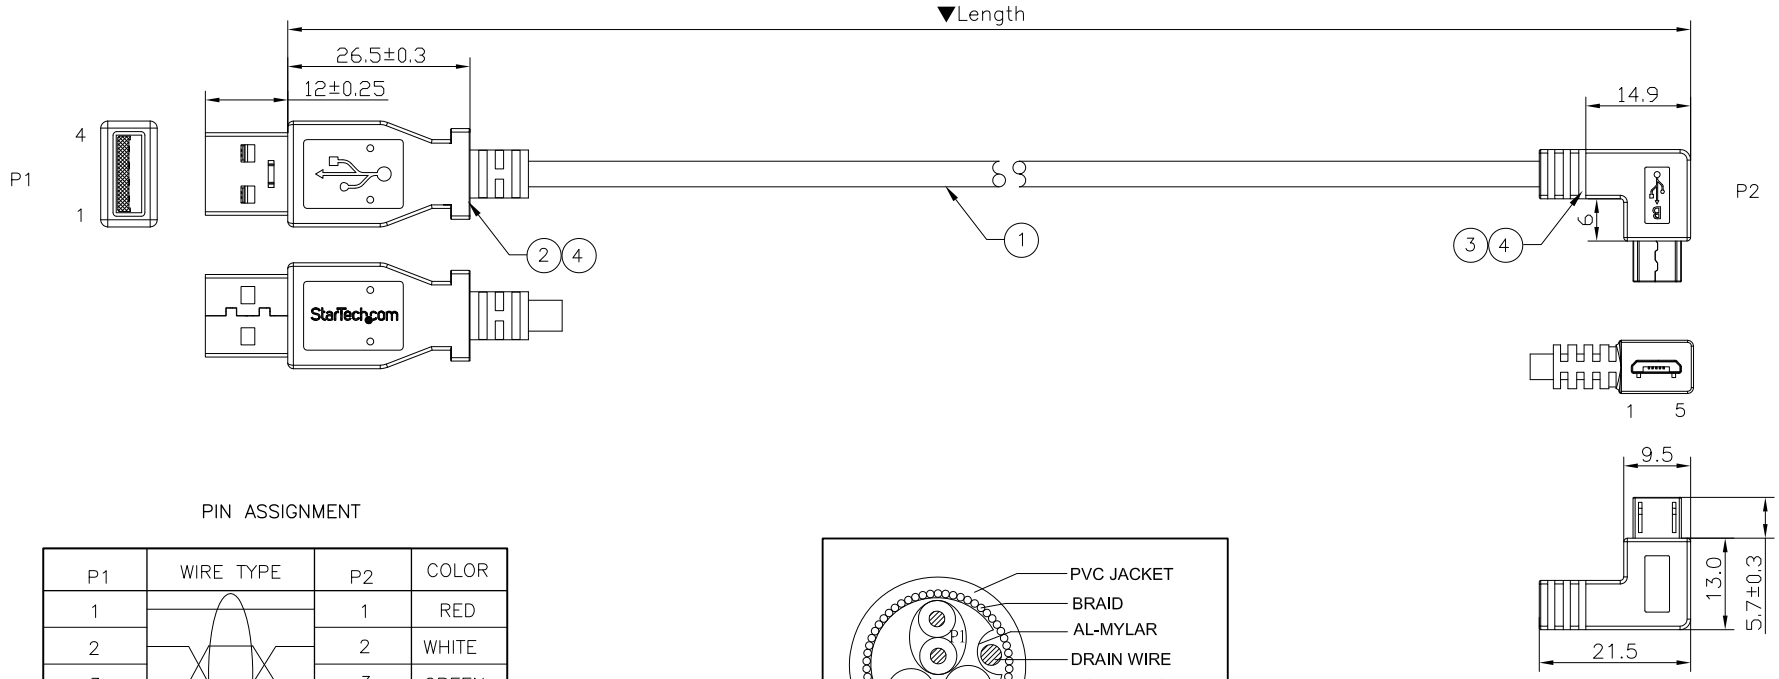

PIN ASSIGNMENT

P1	WIRE TYPE	P2	COLOR
1		1	RED
2		2	WHITE
3		3	GREEN
4		5	BLACK
SHELL		SHELL	DRAIN

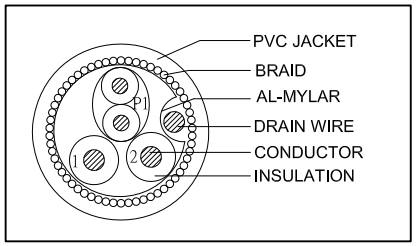

NOTE:
1. OPEN/SHORT/INTERMITTENCE 100% TEST.
2. DIELECTRIC STRENGTH:200 VOLTS AC 2mA MAX/0.02S.
3. INSULATION RESISTANCE:300V DC/0.02SEC, 10MΩ MIN.
4. CONDUCTIVE RESISTANCE:2Ω MAX.
5. RoHS COMPLIANT.

SKU	LENGTH
USBAUB50CMRA	500MM±25MM
USBAUB1MRA	1000MM±30MM
USBAUB2MRA	2000MM±30MM

NO.	NAME	MATERIAL DESCRIPTION
4	OVER MOLD	PVC, COLOR:BLACK
3	CONNECTOR	MICRO USB 5P B/M(SOLDER TYPE) PIN: G/F, NICKEL PLATED FOR SHELL,BLACK INSULATION.
2	CONNECTOR	USB A/M(SOLDER TYPE) PIN: G/F, NICKEL PLATED FOR SHELL,WHITE INSULATION.
1	CABLE	USB 2.0 UL2725 30#*1P+24#*2C+AL+D(7/0.16TC) +B(16*3/0.12AL-M) OD:3.5mm BLACK PVC JACKET

TOLERANCE UNSPECIFIED

0.000	± 0.15
0.00	± 0.25
0.0	± 0.35
0	± 0.50
ANGLE	± 2°

THIRD ANGLE PROJECTION

GENERAL NOTES

DIMENSIONS ARE IN MM - DO NOT SCALE

THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION THAT IS PROPERTY OF STARTECH.COM

StarTech.com

PRODUCT ID	USBAUBxxxMRA
DESCRIPTION	Micro-USB Charge-and-Sync Cable M/M - Right-Angle Micro-USB - 24 AWG

DO NOT SCALE | SHEET: 1 OF: 1 | UPLOAD DATE: 09/10/2020