


RS ITEM NO 205-511



LED/Multiled	LED	Optimum voltage (V)	12Vac/dc	Intensity	550mcd Typ
Mounting Size	Bi-Pin	Rectifier	-	Reverse Voltage	5Vdc
Mounting Finish	-	AC current	6mA		
Protection	-	DC current	12mA		
Mount Holder	-	Voltage Tolerance(%)	10%		
Chip Qty	-	Optimum temperature (°C)	-25°C...+60°C		
Indicator colour	Blue	Storage temperature (°C)	-25°C...+60°C		
Wavelength (nm)	470nm	Contact Tab	Bi-Pin		

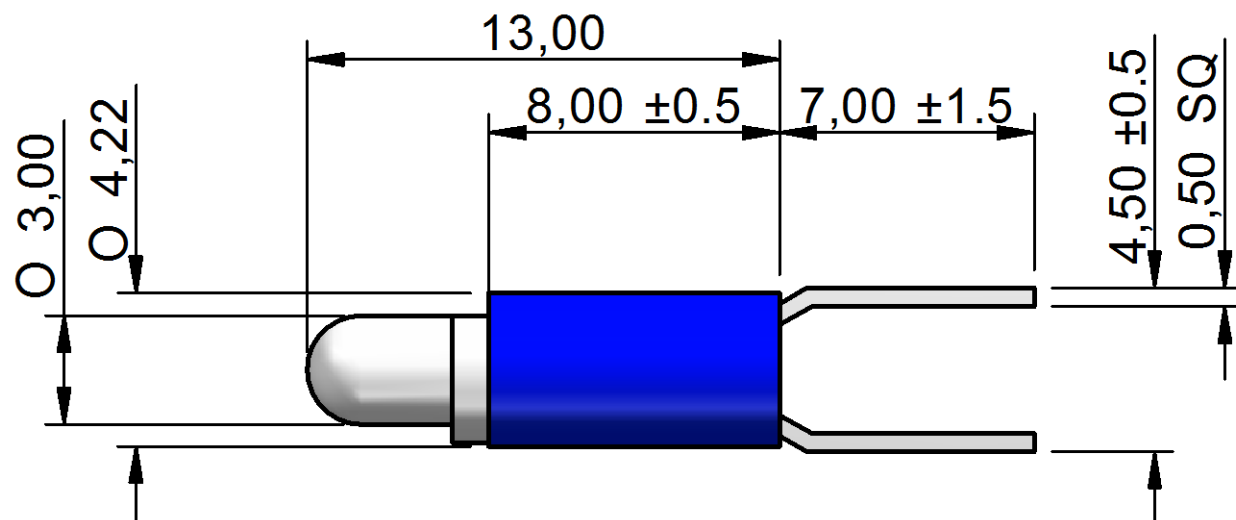

*Dimension in mm (typical), not to scale.
We reserve the right to make changes without further notice to this product to improve reliability, function or design.*