

FEATURES

- Polyester coated stainless steel
- Flame retardant
- High tensile strength
- Self-locking design, secure and easy to fit

RS PRO Metallic Polyester Coated Stainless Steel Roller Ball Cable Tie, 520mm x 7.9 mm

RS Stock No.: 547-4383



RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

They are an ideal alternative where nylon ties are not suitable such as harsh environments or places where there is heat. These cable ties have a roller ball design which is self-locking and fast and easy to install. Rollerball ties have a locking ball bearing which grips the tie strap and locks the tie as it is tensioned ideal for securing cabling. They have a greater load carrying capacity and may be used for general strapping applications. With the RS PRO wide range, there are a variety of sizes and lengths to suit all your requirements in both black and metallic.

General Specifications

Type	Roller ball
Colour	Metallic
Material	Polyster coated stainless steel
Application	applications in industries such as: Oil and gas Marine Chemical Maintenance Automotive Solar Ship Building Mining Defence Services
Resistant To	Ultraviolet resistance
UV Resistant	Yes
Minimum Operating Temperature	-80°C
Maximum Operating Temperature	150°C
Fire Behaviour	Flame Retardant, Halogen Free
Quantity	150


Mechanical Specifications

Length	520mm
Width	7.9mm
Tensile Strength	539N
Maximum Bundle Strength	150mm

Approvals

Standards Met

ABS, DNV, Lloyd's Register, UL

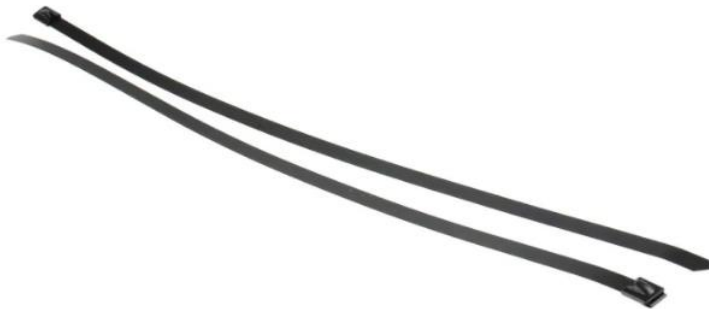

Datasheet

Non-Releaseable Stainless Steel Cable Tie

RS Part No.	Length mm	Width mm	Max Bundle Dia
1595329	360	4.6	100
1595313	200	7.9	50
1595357	150	4.6	50
1595335	360	7.9	100
5474305	520	4.6	150
5474311	520	7.9	150
7436162	680	4.6	200
7436166	380	7.9	200
7436172	1000	4.6	300
7436178	840	7.9	250
7436181	1000	7.9	300

Coated Stainless Steel Cable Tie

RS Part No	Length mm	Width mm	Max Bundle Dia
5474327	150	4.6	50
5474333	360	4.6	100
5474349	250	4.6	150
5474355	200	7.9	50
5474377	360	7.9	100
5474383	520	7.9	150