

Datasheet

RS PRO DIN PLUG SCREW LOCK

Stock No: 2100199, 2100204, 2100208, 2100192, 2100211




Technical Specifications:

To include attributes e.g. height, width, depth, color etc.

Connector type:	Plug
Mounting type:	Cable
IP Rating:	IP40
Contact Gender:	Male
Number of Contact:	3~12

Dimensional line drawings

See examples on Brandzone

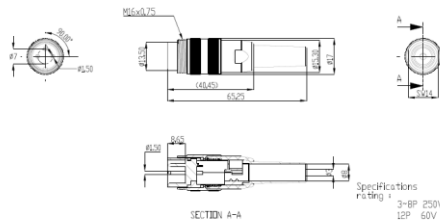

Specifications
 rating :
 3-pc 250V AC 3A MAX
 120V 50V AC 3A MAX
 contact resistance :
 (30-300 MAX) shell=50mΩ MAX
 insulation resistance :
 MIN 100 MΩ @ 500V DC
 Protection Degree : IP40
 Cable Diameter : 5mm

NO.	Description	Material	Tolerance	QTY
1	Handle Holder cap	Zn Alloy	NICKEL P/SL	1
2	Handle Holder shell	Zn Alloy	NICKEL P/SL	1
3	Cable cap	Brass	NICKEL P/SL	1
4	Strap holder	ITO		1
5	Shell	PC		1
6	Cable Holder	Steel	NICKEL P/SL	1
7	Strap	PC		1
8	Handle	PC	NICKEL P/SL	1
9	Terminal	Brass	200μm P/SL	2

TABLE A

①	②	③	④	⑤	⑥	⑦	⑧

①	②	③	④	⑤	⑥	⑦	⑧

