


Datasheet

9 way shielded crimp D plug shell,5A

RS Stock number [481-049](#)

Dimensions: (mm)

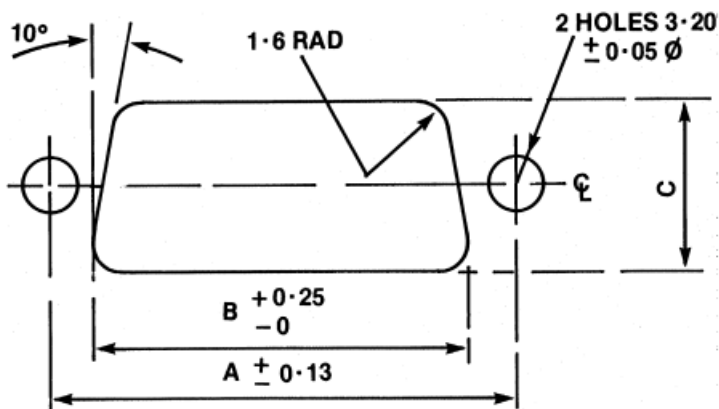

Specifications

- Number of Contacts: 9
- Shell material Steel
- Shell finish Tin plated
- Insulator material Glass filled nylon
- Insulator rating UL 94 V-0
- Contact material Copper alloy
- Contact plating Gold over nickel
- Current rating 5A
- Voltage rating 470Vdc or ac peak
- Contact resistance (max.) -
- Insulation resistance (min) >10MΩ
- Temperature range -55°C to +125°C
- Mating cycles 250
- Wire size 20-24awg