


Compact Laser Displacement Sensor

HL-G1 SERIES



HL-G1 SERIES

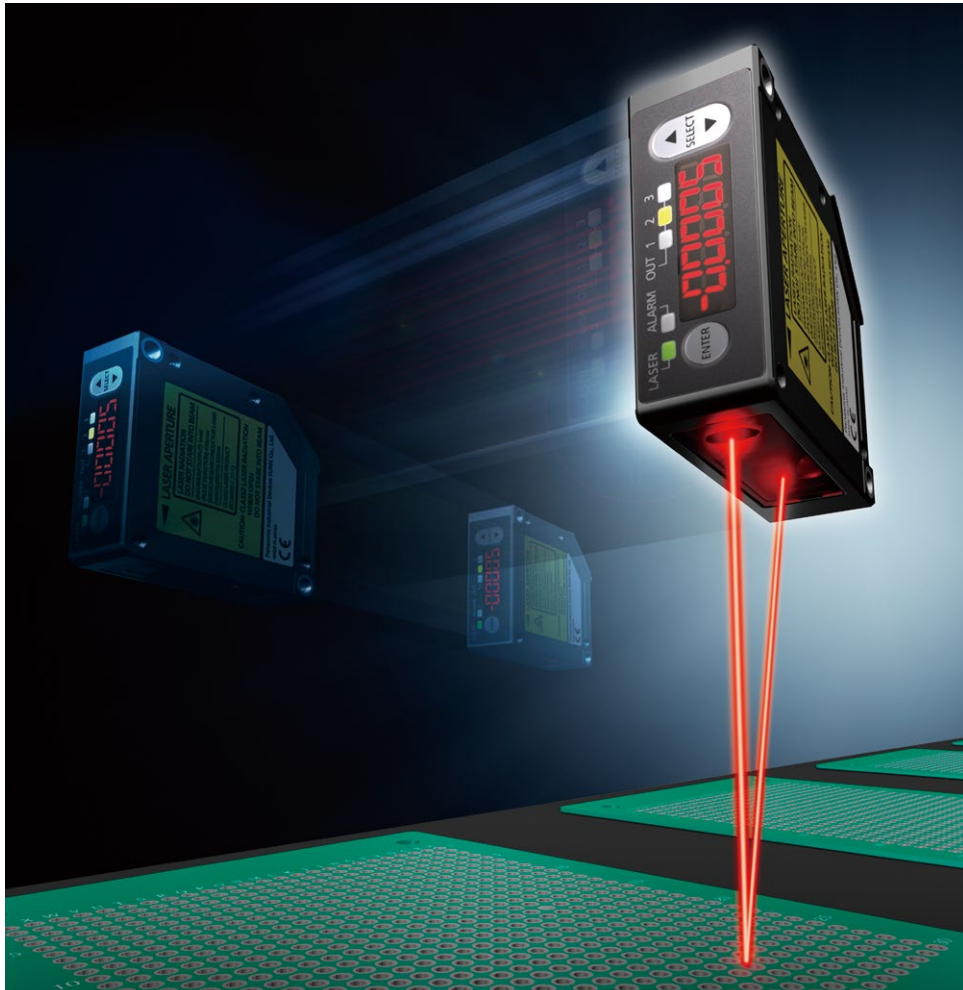

CE

UK
CA

FDA

Conforming to
FDA regulations

Integrated type CMOS laser displacement sensors

This single instrument delivers both high-precision measurement and computer-driven data analysis

High resolution of **0.5 μm 0.020 mil**

Thanks to high-precision measurement at a resolution of 0.5 μm 0.020 mil and an LED digital display that provides exceptional ease of use, the HL-G1 series will see use in a variety of applications on production lines worldwide.

A total of 8 models accommodate a variety of applications

Quick

Setup is fast and efficient by using the built-in digital display to set measurement parameters such as sampling cycle and output options.

Compact

The HL-G1 series features a compact design despite its built-in controller and digital readout. Thanks to our miniaturization technology, it can easily be installed on robot arms and in confined spaces.

Friendly

The HL-G1 series now features a user-friendly interface that offers improved ease of use when operating via computer software or HMI unit for more sophisticated operation and analysis.



Diffuse reflection type

HL-G103□

Measurement range: **30 $\pm$ 4 mm**
 Resolution: **1.181 $\pm$ 0.157 in**
 Linearity: **$\pm$ 0.1 % F.S.**
 Beam diameter: **0.1 $\times$ 0.1 mm**
0.004 $\times$ 0.004 in

Specular reflection type

HL-G103A□

Measurement range: **26.3 $\pm$ 2 mm**
 Resolution: **1.035 $\pm$ 0.079 in**
 Linearity: **$\pm$ 0.2 % F.S.**
 Beam diameter: **0.1 $\times$ 0.1 mm**
0.004 $\times$ 0.004 in

Diffuse reflection type

HL-G105□

Measurement range: **50 $\pm$ 10 mm**
 Resolution: **1.969 $\pm$ 0.394 in**
 Linearity: **$\pm$ 0.1 % F.S.**
 Beam diameter: **0.5 $\times$ 1.0 mm**
0.020 $\times$ 0.039 in

Specular reflection type

HL-G105A□

Measurement range: **47.3 $\pm$ 5 mm**
 Resolution: **1.862 $\pm$ 0.197 in**
 Linearity: **$\pm$ 0.2 % F.S.**
 Beam diameter: **0.1 $\times$ 0.1 mm**
0.004 $\times$ 0.004 in

Diffuse reflection type

HL-G108□

Measurement range: **85 $\pm$ 20 mm**
 Resolution: **3.346 $\pm$ 0.787 in**
 Linearity: **$\pm$ 0.1 % F.S.**
 Beam diameter: **0.75 $\times$ 1.25 mm**
0.030 $\times$ 0.049 in

Specular reflection type

HL-G108A□

Measurement range: **82.9 $\pm$ 10 mm**
 Resolution: **3.264 $\pm$ 0.394 in**
 Linearity: **$\pm$ 0.2 % F.S.**
 Beam diameter: **0.2 $\times$ 0.2 mm**
0.008 $\times$ 0.008 in

Diffuse reflection type





HL-G112□

Measurement range: **120 $\pm$ 60 mm**
 Resolution: **4.724 $\pm$ 2.362 in**
 Linearity: **$\pm$ 0.1 % F.S.**
 Beam diameter: **1.0 $\times$ 1.5 mm**
0.039 $\times$ 0.059 in


Diffuse reflection type

HL-G125□

Measurement range: **250 $\pm$ 150 mm**
 Resolution: **9.843 $\pm$ 5.906 in**
 Linearity: **$\pm$ 0.3 % F.S.**
 Beam diameter: **1.75 $\times$ 3.5 mm**
0.069 $\times$ 0.138 in

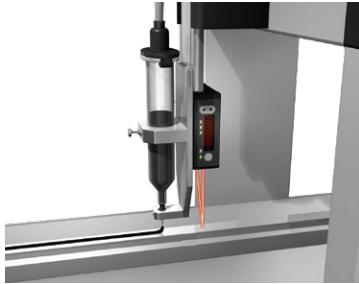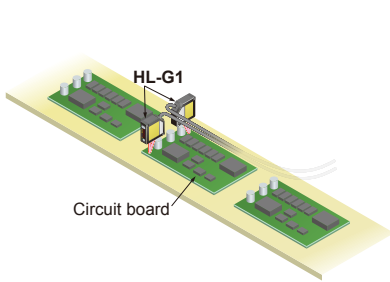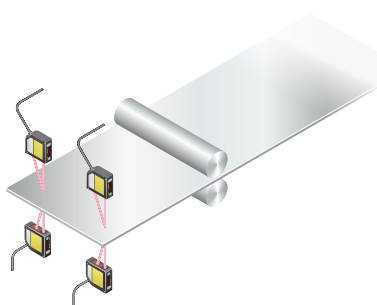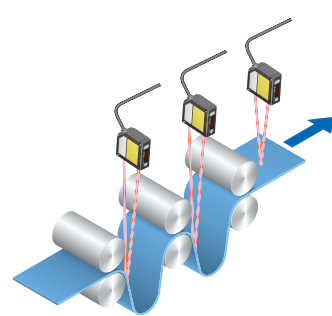APPLICATIONS**Controlling the height of a dispenser nozzle****Positioning of wafer****Measuring the eccentricity of a metal shaft****Detection of circuit board warpage****Measurement of sheet thickness****Testing sheet slack****BASIC PERFORMANCE****Easy input settings while looking at digital display**

The built-in digital display makes it easy to perform sensor setting while checking displacement values.

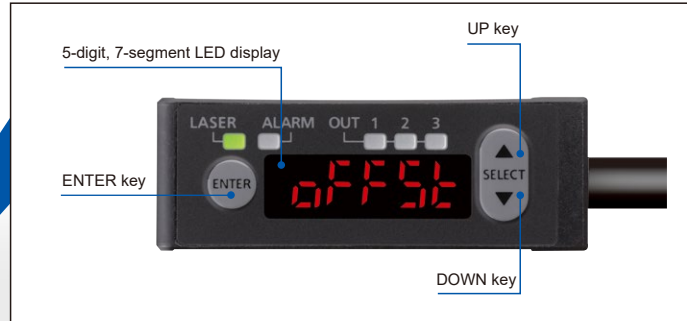**Lightweight body that can be installed on movable parts**

Its lightweight resin body weighs 70 g approx., which can be installed on moving parts such as sliders and robot arms. Cable with superior flexibility is fitted as standard.


Compact

Compact size despite the built-in controller and digital read out.



Easy to embed in machines and production lines

Controller installation and mounting space is not required because controller function is included in sensor unit.

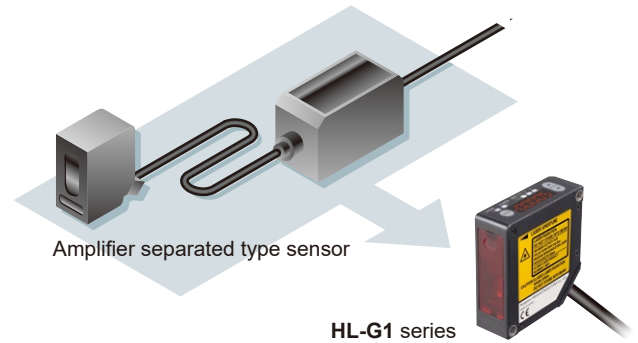

IP67 protective enclosure protects from water and dust

Thanks to its IP67 protective enclosure, the **HL-G1** can be used in the presence of water and dust. Mounting holes are lined with metal sleeves, allowing the instrument to be tightened securely in place with up to 0.8 N·m of torque.



FUNCTIONS

Timing input and multi input

In addition to timing input select the desired input according to your application:

- Zero set on / off
- Reset
- Memory switching
- Laser control
- Teaching
- Saving

Support for both NPN and PNP polarity **GLOBAL SUPPORT**

A single model number accommodates both NPN and PNP wiring polarity, reducing the number of model numbers that must be registered for maintenance purposes.

Featuring 3 outputs and an analog 2 outputs

With three outputs, the **HL-G1** can be used to generate HI / GO / LOW judgment output or alarm output. The analog output can be used in both current and voltage modes.

Memory switching function


Up to four groups of sensor settings can be stored for fast recall. Easy switching among setting groups allows smooth setup changes.

HIGH FUNCTION TYPE (HL-G1□-S-J / HL-G1□-RS-J)

The integrated communications interface lets the sensor communicate with upstream devices such as PLCs.


1:1 communication via RS-422 or 1:16 communication via RS-485 is possible. Up to 16 HL-G1 units can be connected to one PLC to communicate measurement values. When using one of our PLCs*, you can use the PLC's data write / read instructions (F145 and F146) to easily configure HL-G1 series settings and acquire measurement output.

* Supported PLCs from Panasonic Industry:
FP0R, FP0H, FP-XH, FP7

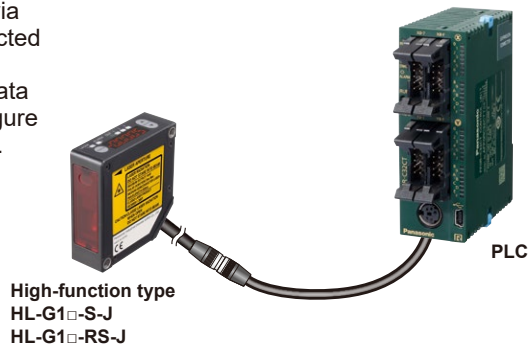**Software tool for sensor configuration and evaluation (Free download available)**

In addition to configuring up to 16 sensors at once, this free tool makes it easy to gather data needed for analysis, such as received light waveform monitoring and data buffering. The interface language can be selected at the time of installation.

- **Data buffering**
Stores and displays measurement data, which can be superimposed on previously recorded data for easy comparison and analysis.
- **Received light waveform display**
Displays the amount of light received by cell from light-receiving element.
- **Measured value display**
Displays measured values as well as the output state for each terminal.

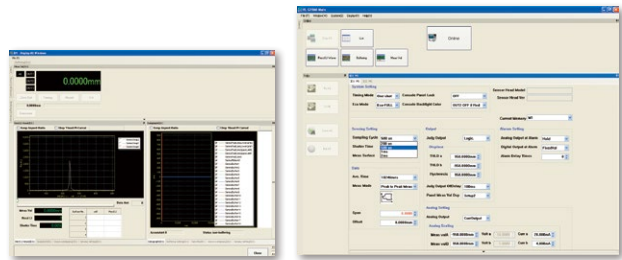**HMI screen (Free download available)**

The **GT02 / GT12** series HMI can be used in combination with the **HL-G1** to allow easy confirmation of sensor status and configuration of sensor settings from a remote location. Japanese, English, Chinese, and Korean are supported. For more information about the **GT02 / GT12** series, visit our website.

Select from the following HMI operator panels:

Power supply: 24 V
Communication port: RS-422 / RS-485

- AIG02GQ14D / AIG02GQ15D
- AIG02MQ14D / AIG02MQ15D
- AIG12GQ04D / AIG12GQ05D
- AIG12MQ04D / AIG12MQ05D

- * Orders for the **GT02 / GT12** series will be discontinued on the date below.
- Type with SD memory card slot:
Orders closed at the end of September 2024.
 - Type without SD memory card slot:
Orders will end at the end of September 2025.

**Multilingualization****GLOBAL SUPPORT**

Software tool and HMI screen data support not only Japanese and English, but also Chinese and Korean, providing a new level of support for devices and equipment in use worldwide.

[Software is available for download.](#)

Setting and monitoring software tool, HMI screen data, function blocks, etc.

Terms of use

Panasonic Industry offers no warranty for this software and is not liable for any loss or damage suffered as a result of its use or operation, whether direct, indirect, incidental, consequential, or unforeseen.

ORDER GUIDE

When using the high function type sensor, please order the extension cable separately.

Type		Appearance	Measurement center distance and measuring range	Resolution	Beam diameter	Model No.
Diffuse reflection type	Standard type		30 ±4 mm 1.181 ±0.157 in	0.5 μm 0.020 mil	0.1 × 0.1 mm 0.004 × 0.004 in	HL-G103-A-C5
	High function type					HL-G103-S-J
	Standard type		50 ±10 mm 1.969 ±0.394 in	1.5 μm 0.059 mil	0.5 × 1 mm 0.020 × 0.039 in	HL-G105-A-C5
	High function type					HL-G105-S-J
	Standard type		85 ±20 mm 3.346 ±0.787 in	2.5 μm 0.098 mil	0.75 × 1.25 mm 0.030 × 0.049 in	HL-G108-A-C5
	High function type					HL-G108-S-J
	Standard type		120 ±60 mm 4.724 ±2.362 in	8 μm 0.315 mil	1.0 × 1.5 mm 0.039 × 0.059 in	HL-G112-A-C5
	High function type					HL-G112-S-J
	Standard type		250 ±150 mm 9.843 ±5.906 in	20 μm 0.787 mil	1.75 × 3.5 mm 0.069 × 0.138 in	HL-G125-A-C5
	High function type					HL-G125-S-J
Specular reflection type	Standard type		26.3 ±2 mm 1.035 ±0.079 in	0.5 μm 0.020 mil	0.1 × 0.1 mm 0.004 × 0.004 in	HL-G103A-RA-C5
	High function type					HL-G103A-RS-J
	Standard type		47.3 ±5 mm 1.862 ±0.197 in	1.5 μm 0.059 mil		HL-G105A-RA-C5
	High function type					HL-G105A-RS-J
	Standard type		82.9 ±10 mm 3.264 ±0.394 in	2.5 μm 0.098 mil	0.2 × 0.2 mm 0.008 × 0.008 in	HL-G108A-RA-C5
	High function type					HL-G108A-RS-J

Note: High function type have communication interfaces (RS-422 / RS-485) and a cable with connector.

OPTIONS

When using the high function type sensor, please order the extension cable separately.

Type	Appearance	Model No.	Description
Extension cable (for high function type)		HL-G1CCJ2	Length: 2 m 6.562 ft, Weight: 130 g approx.
		HL-G1CCJ5	Length: 5 m 16.404 ft, Weight: 320 g approx.
		HL-G1CCJ10	Length: 10 m 32.808 ft, Weight: 630 g approx.
		HL-G1CCJ20	Length: 20 m 65.617 ft, Weight: 1,300 g approx.

14-core cabtyre cable with connector on one side

OPERATING ENVIRONMENT OF SOFTWARE TOOL

Operating environment				
OS	OS	32-bit / 64-bit	Edition	Service Pack
	Windows® 11	64-bit	Pro	—
	Windows® 10	32-bit / 64-bit		
CPU	2 GHz or more processor (however, it depends on the operating environment of the OS)			
Graphics	SXGA (1,280 × 1,024 full colors) or more			
Memory	Windows® 11 (64-bit) / 10 (64-bit): 4 GB or more Windows® 10 (32-bit): 2 GB or more			
Hard disk	2 GB or more free space required for installation			
USB interface	USB 2.0 full speed (USB 1.1 compatible)			

Notes: 1) This software accommodates below language. You can select the language when installing.

Japanese, English, Korean, Chinese

2) Windows is trademark or registered trademark of Microsoft Corporation in the United States and other countries.

3) OS versions that are no longer supported by Microsoft are excluded from the supported OS.

INFORMATION OF INTERFACE CONVERTER

The communications interface converter of **HL-G1** series is RS-422 or RS-485. Use the HMI operator panel **GT02** or **GT12** (through mode) or the following interface converter (Recommended product: SI-35USB manufactured by LINEEYE, others are guaranteed to none work.) when using the tool software **HL-G1SMI** and connecting to PC by USB.

LINEEYE CO., LTD.
Interface converter (USB to RS-422/485) SI-35USB
Website: <https://www.lineeye.com>

SPECIFICATIONS

Item	Model No.	Type	Diffuse reflection type					Specular reflection type		
		Standard type	HL-G103-A-C5	HL-G105-A-C5	HL-G108-A-C5	HL-G112-A-C5	HL-G125-A-C5	HL-G103A-RA-C5	HL-G105A-RA-C5	HL-G108A-RA-C5
		High function type	HL-G103-S-J	HL-G105-S-J	HL-G108-S-J	HL-G112-S-J	HL-G125-S-J	HL-G103A-RS-J	HL-G105A-RS-J	HL-G108A-RS-J
Applicable regulations			CE Marking (EMC Directive, RoHS Directive), UKCA Marking (EMC Regulations, RoHS Regulations), FDA regulations							
Measurement center distance			30 mm 1.181 in	50 mm 1.969 in	85 mm 3.346 in	120 mm 4.724 in	250 mm 9.843 in	26.3 mm 1.035 in	47.3 mm 1.862 in	82.9 mm 3.264 in
Measuring range			±4 mm ±0.157 in	±10 mm ±0.394 in	±20 mm ±0.787 in	±60 mm ±2.362 in	±150 mm ±5.906 in	±2 mm ±0.079 in	±5 mm ±0.197 in	±10 mm ±0.394 in
Resolution			0.5 μm 0.020 mil	1.5 μm 0.059 mil	2.5 μm 0.098 mil	8 μm 0.315 mil	20 μm 0.787 mil	0.5 μm 0.020 mil	1.5 μm 0.059 mil	2.5 μm 0.098 mil
Linearity			±0.1 % F.S.				±0.3 % F.S.	±0.2 % F.S.		
Temperature characteristics			±0.08 % F.S./°C							
Light source			Red semiconductor laser, Class 2 (Class 1 for specular reflection type) [IEC / EN / JIS / GB / KS / FDA (Note 2)], Max. output: 1 mW (0.39mW for specular reflection type), Peak emission wavelength: 655 nm 0.026 mil							
Beam diameter (Note 3)			0.1 × 0.1 mm 0.004 × 0.004 in	0.5 × 1.0 mm 0.020 × 0.039 in	0.75 × 1.25 mm 0.030 × 0.049 in	1.0 × 1.5 mm 0.039 × 0.059 in	1.75 × 3.5 mm 0.069 × 0.138 in	0.1 × 0.1 mm 0.004 × 0.004 in		0.2 × 0.2 mm 0.008 × 0.008 in
Receiving element			CMOS image sensor							
Supply voltage			24 V DC ±10 % including ripple 0.5 V (P-P)							
Current consumption			100 mA max.							
Sampling rate			200 μs, 500 μs, 1 ms, 2 ms							
Analog output	Voltage	Output range: 0 to 10.5 V (normal) / 11 V (at alarm), Output impedance: 100 Ω								
	Current	Output range: 3.2 to 20.8 mA (normal) / 21.6 mA (at alarm), Load impedance: 300 Ω or less								
Outputs (OUT 1, OUT 2, OUT 3)			Judgment output or alarm output (setting selectable) NPN open-collector transistor / PNP open-collector transistor (selectable)							
			<In case of using NPN output> • Maximum sink current: 50 mA • Applied voltage: 3 to 24 V DC (between output and 0 V) • Residual voltage: 2 V or less (at 50 mA of sink current) • Leakage current: 0.1 mA or less				<In case of using PNP output> • Maximum source current: 50 mA • Residual voltage: 2.8 V or less (at 50 mA of source current) • Leakage current: 0.1 mA or less			
	Output operation	Open when the output is ON.								
	Short circuit protection	Incorporated (automatic restoration)								
Output polarity setting input			NPN open collector output operates when 0 V is connected. PNP open collector output operates when 24 V DC is connected.							
Timing input			NPN output operates when 0 V is connected and NPN is set (depending on settings). PNP output operates when external power + is connected and PNP is set (depending on settings).							
Multi input			Zero set, zero set off, reset, memory switching, teaching, saving, and laser control according to the input time. • In case NPN output is selected, function varies according to the time 0 V is connected NPN. • In case PNP output is selected, function varies according to the time external power + is connected.							
Communications interface (high-function type only)			RS-422 or RS-485 (selectable) Baud rate: 9,600 / 19,200 / 38,400 / 115,200 / 230,400 / 460,800 / 921,600 bps, Data length 8 bits, stop bit length 1 bit, without parity check, BCC check, termination code: CR							
Indicator	Laser emission	Green LED (lights up during laser emission)								
	Alarm	Orange LED (lights up when this product cannot measure because of insufficient or excessive light intensity)								
	Output	Yellow LED × 3								
Digital display			Red LED 5.5 digit display							
Environmental resistance	Ambient altitude	2,000 m 6,561 ft or less								
	Pollution degree	2								
	Protection	IP67 (IEC) (Excluding connector part)								
	Ambient temperature	−10 to +45 °C +14 to +113 °F (No dew condensation or icing allowed), Storage: −20 to +60 °C −4 to +140 °F								
	Ambient humidity	35 to 85 % RH, Storage: 35 to 85 % RH								
	Ambient illuminance	Incandescent light: 3,000 lx or less at the light-receiving face (Note 4)								
	Insulation resistance	20 MΩ, or more, with 250 V DC megger between all supply teminals connected together and enclosure								
	Voltage withstandability	1,000 V AC for one min. between all supply terminals connected together and enclosure								
	Vibration resistance	10 to 55 Hz (period: 1 min.) frequency, 1.5 mm 0.059 in double amplitude in X,Y and Z directions for two hours each								
Shock resistance			500 m/s ² acceleration (50 G approx.) in X,Y and Z directions three times each							
Material			Enclosure: PBT, Front cover: Acrylic, Cable: PVC							
Cable			Standard type: 0.1 mm ² 10-core cabtyre cable, 5 m 16.404 ft long, high function type: 14-core cabtyre cable with connector, 0.5 m 1.640 ft long							
Cable extension			Extension up to total 20 m 65.617 ft is possible with optional cable (Cable for standard type cannot be extended).							
Weight	Standard type	Net weight: 70 g approx. (not including cable), 320 g approx. (including cable), gross weight: 380 g approx.								
	High function type	Net weight: 70 g approx. (not including cable), 110 g approx. (including cable), gross weight: 160 g approx.								
Accessory			Warning label: 1 set							

Notes: 1) Where measurement conditions have not been specified precisely, the conditions used were as follows: supply voltage 24 V DC, ambient temperature +20 °C +68 °F, sampling rate 500 μs, average number of samples: 1024, measurement center distance, object measured is made of white ceramic (specular reflection type: an aluminum vapor deposition surface reflection mirror) and analog measurement values.

2) This product complies with the FDA regulations (FDA 21 CFR 1040.10 and 1040.11) in accordance with FDA Laser Notice No. 56, except for complying with IEC 60825-1 Ed. 3.


3) This beam diameter is the size at the measurement center distance. These values were defined by using 1/e² (13.5 %) of the center light intensity. The results may be affected if there is a slight leakage of light outside the normal spot diameter and if the periphery surrounding the sensing point has a higher reflectivity than the sensing point itself.

4) The fluctuation by ambient illuminance is ±0.1 % F.S. or less.

I/O CIRCUIT AND WIRING DIAGRAMS

I/O circuit diagrams

When selecting NPN output

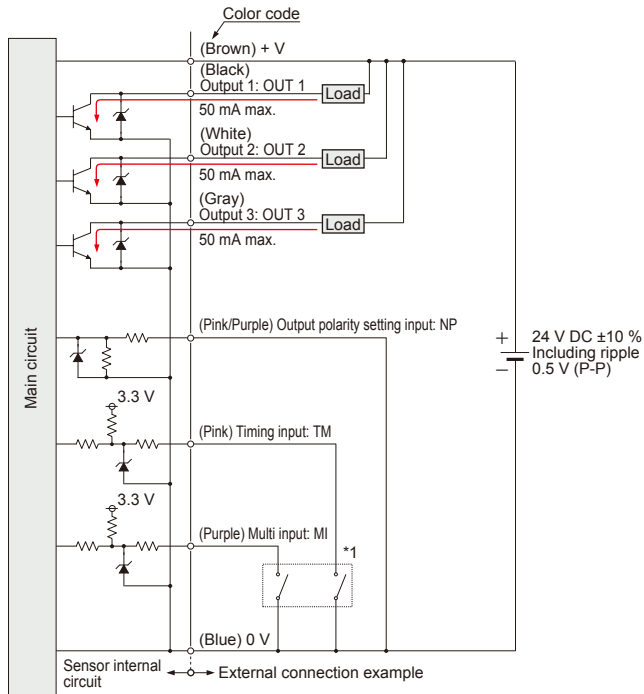


*1

Non-voltage contact




When selecting PNP output

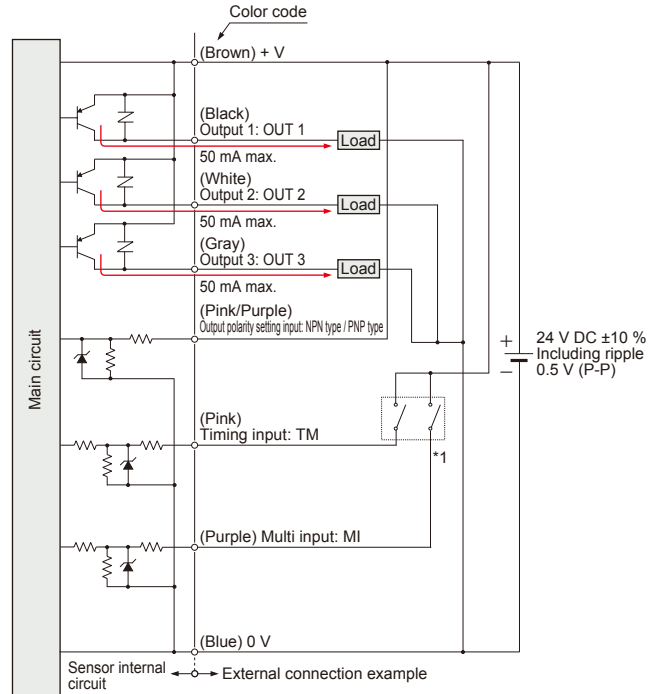


*1

Non-voltage contact or PNP open-collector transistor output



High [+5 V to +30 V DC (source current 0.04 mA or less)] : Effective
 Low (0 to 0.6 V DC or open) : Ineffective

Analog output (common in NPN output type and PNP output type)

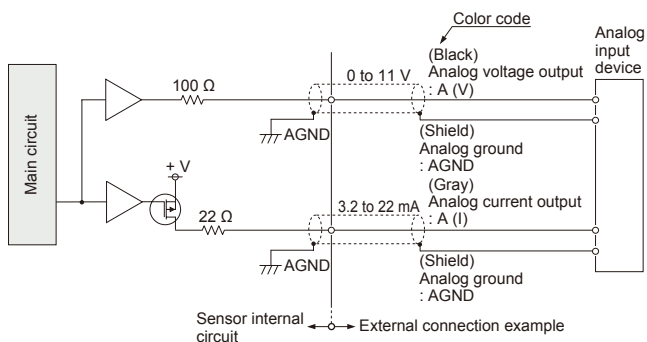

Notes: 1) Analog output is not equipped with the short-circuit protection.
 Do not short-circuit or apply voltage to them.
 2) Use shielded wires for analog outputs.


I/O CIRCUIT AND WIRING DIAGRAMS

Communication specifications (High function type)


Communication method	RS-422	RS-485
	Full duplex	Half duplex
Synchronization method	Asynchronous communication method	
Transmission code	ASC II	
Baud rate	9,600 / 19,200 / 38,400 / 115,200 / 230,400 / 460,800 / 921,600 bps	
Data length	8 bits	
Stop bit length	1 bit	
Parity check	None	
BCC	Yes	
Termination code	CR	

The **HL-G1** can be connected to upper devices of RS-422/485.

When upper device sends the request command, the **HL-G1** series send the response command.

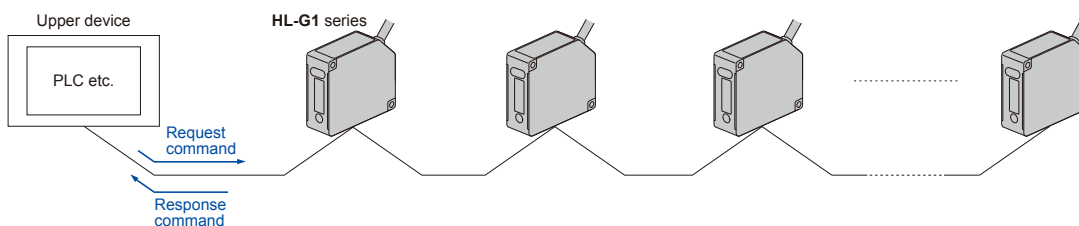


RS-422 1-to-1 connection

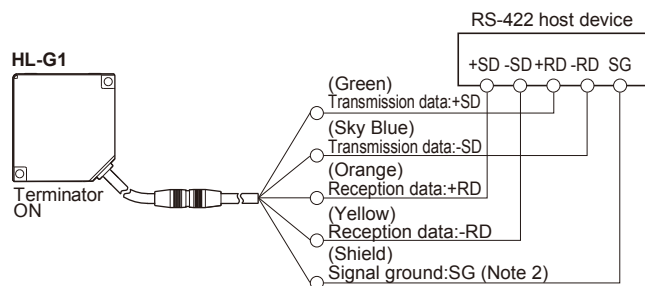

- Notes:
- 1) The transmission data cable and reception data cable are both twisted-pair cables.
 - 2) The shield is connected to the 0 V side of the power supply line inside the sensor.
 - 3) Be sure to connect the signal ground.
 - 4) The sensor is of non-isolated type. Make sure that the potential difference between the sensor and RS-422 connecting device does not exceed 4 V. A difference in potential in excess may cause the connecting device or the sensor to malfunction.

RS-485 1-to-N connection


- Connectable up to 16 units.
- Please set the prefix with no duplication.

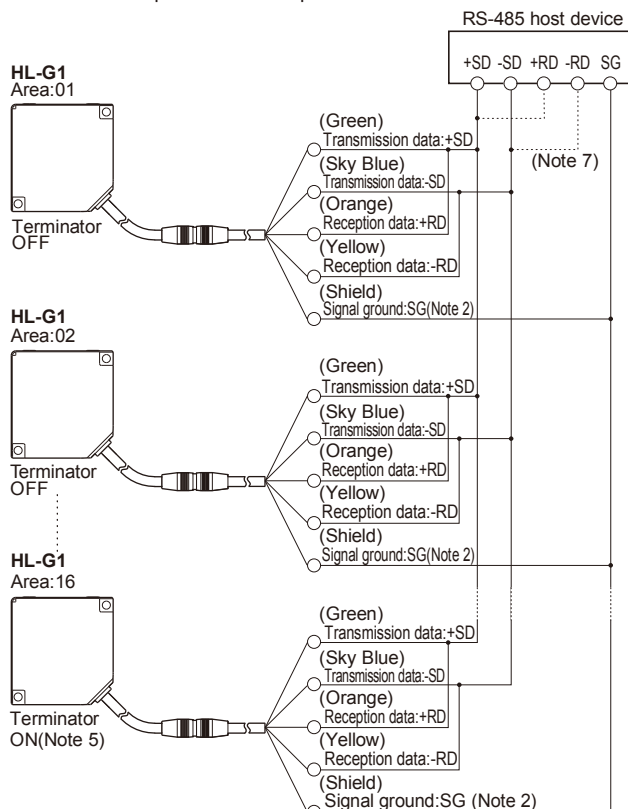


- Notes:
- 1) The transmission data cable and reception data cable are both twisted-pair cables.
 - 2) The shield is connected to the 0 V side of the power supply line inside the sensor.
 - 3) Be sure to connect the signal ground.
 - 4) The sensor is of non-isolated type. Make sure that the potential difference between the sensor and RS-485 connecting device does not exceed 4 V. A difference in potential in excess may cause the connecting device or the sensor to malfunction.
 - 5) The sensor has a built-in terminating resistor. Be sure to turn ON the terminating resistor of the terminating sensor.
 - 6) Perform transition wiring for the transmission path.
 - 7) Connect the wires according to the specification of the equipment.

SENSING CHARACTERISTICS (TYPICAL)**Correlation between measuring distance and error characteristics****Diffuse reflection type**


White ceramic
Vertical orientation




White ceramic
Horizontal orientation

**Specular reflection type**


Aluminum vapor deposition
surface reflection mirror
Vertical orientation




Aluminum vapor deposition
surface reflection mirror
Horizontal orientation

**HL-G103****Diffuse reflection type**


Vertical positioning




Horizontal positioning

**HL-G105****Diffuse reflection type**


Vertical positioning




Horizontal positioning

**HL-G108****Diffuse reflection type**


Vertical positioning




Horizontal positioning

**HL-G112****Diffuse reflection type**


Vertical positioning




Horizontal positioning

**HL-G125****Diffuse reflection type**


Vertical positioning




Horizontal positioning

**HL-G103A****Specular reflection type**


Vertical positioning




Horizontal positioning

**HL-G105A****Specular reflection type**


Vertical positioning




Horizontal positioning

**HL-G108A****Specular reflection type**

Vertical positioning



Horizontal positioning



PRECAUTIONS FOR PROPER USE



- Never use this product as a sensing device for personnel protection.
- In case of using sensing devices for personnel protection, use products which meet laws and standards, such as OSHA, ANSI or IEC etc., for personnel protection applicable in each region or country.



- Do not operate products using methods other than the ones described in the instruction manual of each product. Control or adjustment through procedures other than the ones specified may cause hazardous laser radiation exposure.
- The following labels are attached to the product. Handle the product according to the instruction given on the warning label.
(The Japanese, English, Chinese, Korean warning labels are included in the package of the diffuse reflection type (HL-G1□-S-J / HL-G1□-A-C5).)

HL-G1□-S-J / HL-G1□-A-C5

- This product is classified as a Class 2 Laser Product in EN / JIS / GB / KS standards and FDA* regulations. Do not look at the laser beam directly or through optical system such as a lens.



HL-G1□A-RS-J / HL-G1□A-RA-C5


- This product is classified as a Class 1 Laser Product in IEC / EN / JIS / GB / KS standards and FDA* regulations. Do not look at the laser beam through optical devices such as a lens.




*This product complies with the FDA regulations (FDA 21 CFR 1040.10 and 1040.11) in accordance with FDA Laser Notice No. 56, except for complying with IEC 60825-1 Ed. 3.

Beam diameter (Unit: mm in)

Diffuse reflection type

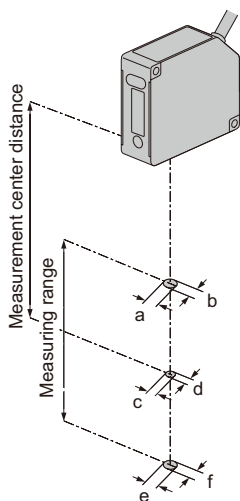

Specular reflection type

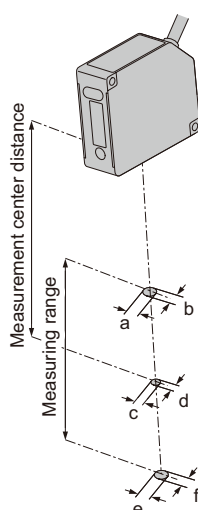


Type	Model No.	Beam diameter (Unit: mm in)					
		a	b	c	d	e	f
Diffuse reflection type	HL-G103-S-J HL-G103-A-C5	0.15 0.006	0.15 0.006	0.1 0.004	0.1 0.004	0.15 0.006	0.15 0.006
	HL-G105-S-J HL-G105-A-C5	1.2 0.047	0.6 0.024	1.0 0.039	0.5 0.020	0.9 0.035	0.4 0.016
	HL-G108-S-J HL-G108-A-C5	1.5 0.059	0.9 0.030	1.25 0.049	0.75 0.030	1.0 0.039	0.6 0.024
	HL-G112-S-J HL-G112-A-C5	1.8 0.071	1.2 0.047	1.5 0.059	1.0 0.039	0.8 0.031	0.5 0.020
	HL-G125-S-J HL-G125-A-C5	2.5 0.098	1.5 0.059	3.5 0.138	1.75 0.069	4.5 0.177	2.0 0.079
Specular reflection type	HL-G103-RS-J HL-G103-RA-C5	0.15 0.006	0.15 0.006	0.1 0.004	0.1 0.004	0.15 0.006	0.15 0.006
	HL-G105-RS-J HL-G105-RA-C5	0.15 0.006	0.15 0.006	0.1 0.004	0.1 0.004	0.15 0.006	0.15 0.006
	HL-G108-RS-J HL-G108-RA-C5	0.2 0.008	0.2 0.008	0.2 0.008	0.2 0.008	0.2 0.008	0.2 0.008


Sensor mounting direction

- To obtain the greatest precision, the sensor head should be oriented facing the direction of movement of the object's surface, as shown in the figure below.


Object with variations in material or color

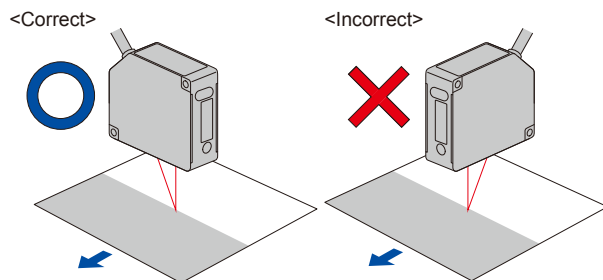

Rotating object

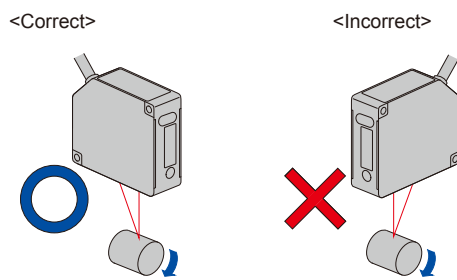

Object that has large differences in gaps, grooves and colors

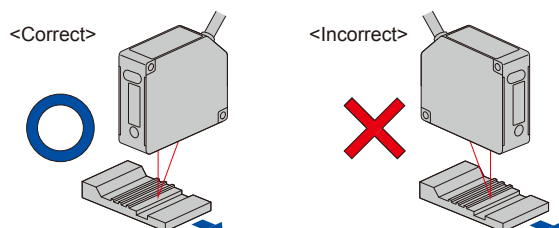


PRECAUTIONS FOR PROPER USE


Mutual interference (Unit: mm in)

- When installing two or more sensor heads side by side, mutual interference will not occur if the laser spots from other sensor heads do not fall within the shaded areas in the figure below.


HL-G103




HL-G105

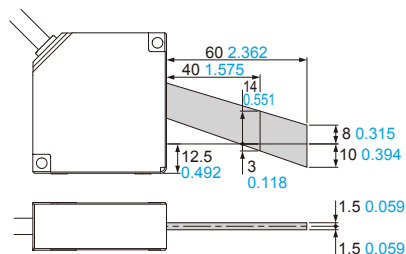


HL-G108

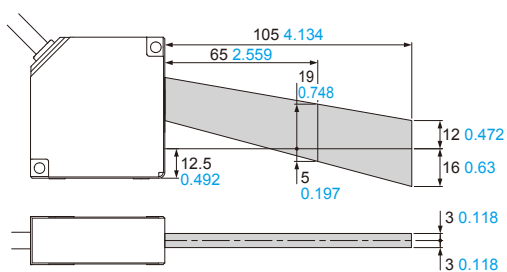

HL-G112

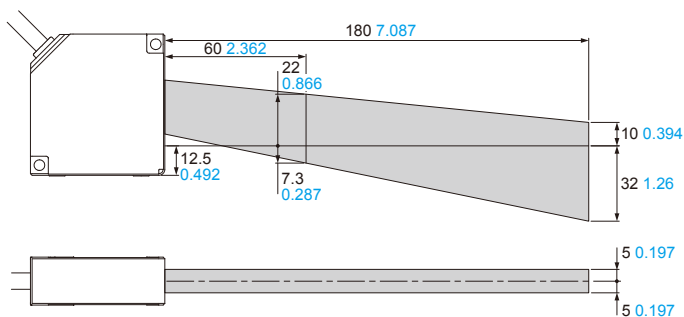

HL-G125

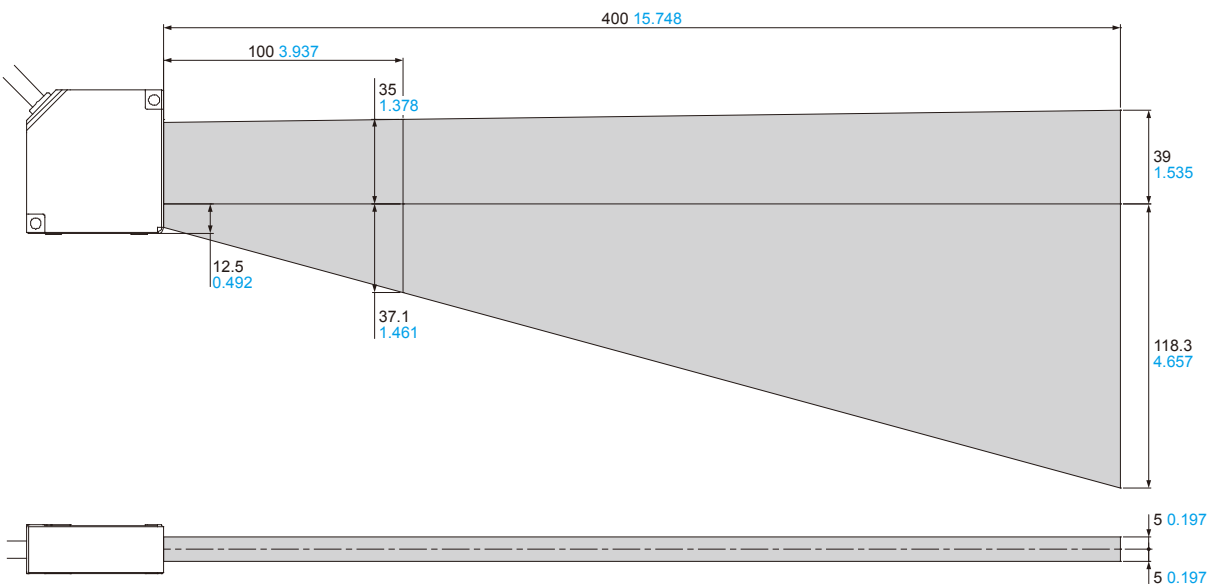


DIMENSIONS (Unit: mm in)

The CAD data can be downloaded from our website.

HL-G1□-A-C5


Sensor (Diffuse reflection / Standard type)

Model No.	Measurement center distance (ℓ)	θ
HL-G103-A-C5	30 1.181	30°
HL-G105-A-C5	50 1.969	21°
HL-G108-A-C5	85 3.346	15°
HL-G112-A-C5	120 4.724	11°
HL-G125-A-C5	250 9.843	6.2°

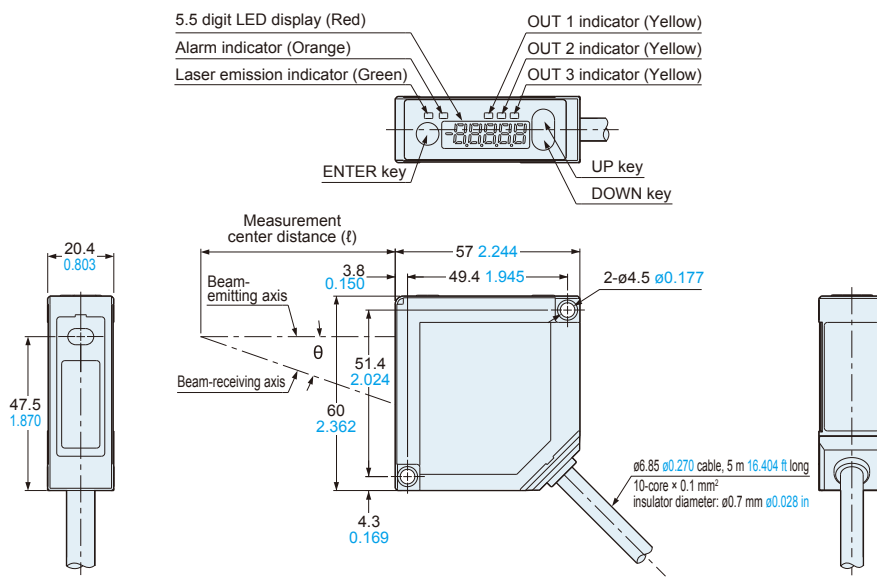**HL-G1□-S-J**


Sensor (Diffuse reflection / High function type)

Model No.	Measurement center distance (ℓ)	θ
HL-G103-S-J	30 1.181	30°
HL-G105-S-J	50 1.969	21°
HL-G108-S-J	85 3.346	15°
HL-G112-S-J	120 4.724	11°
HL-G125-S-J	250 9.843	6.2°

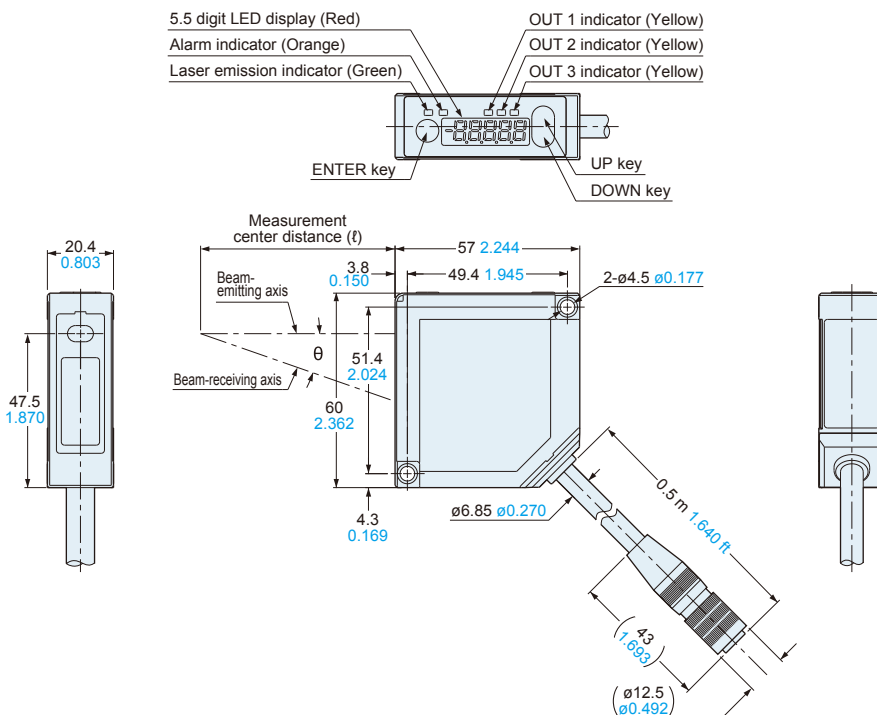**HL-G1CCJ□**







Extension cable (Optional)

Model No.	L
HL-G1CCJ2	2,000 ⁺²⁰⁰ ₀ 78.740 ^{+7.874} ₀
HL-G1CCJ5	5,000 ⁺⁵⁰⁰ ₀ 196.850 ^{+19.685} ₀
HL-G1CCJ10	10,000 ^{+1,000} ₀ 393.701 ^{+39.370} ₀
HL-G1CCJ20	20,000 ^{+2,000} ₀ 787.402 ^{+78.740} ₀

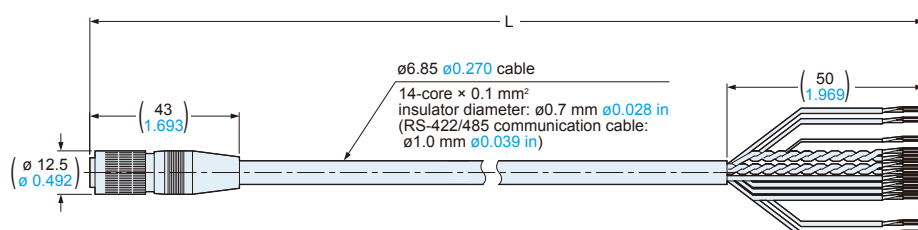

DIMENSIONS (Unit: mm in)

The CAD data can be downloaded from our website.

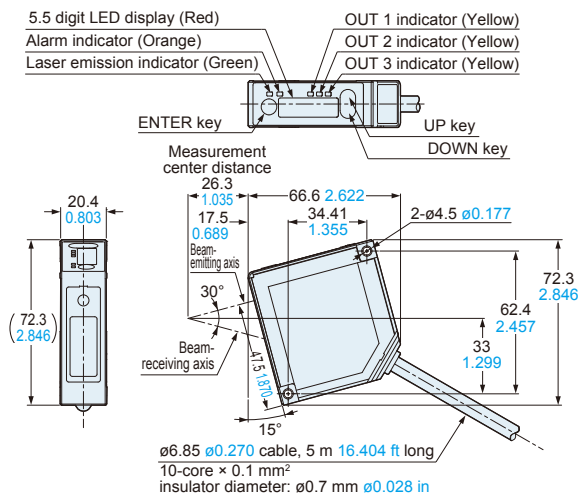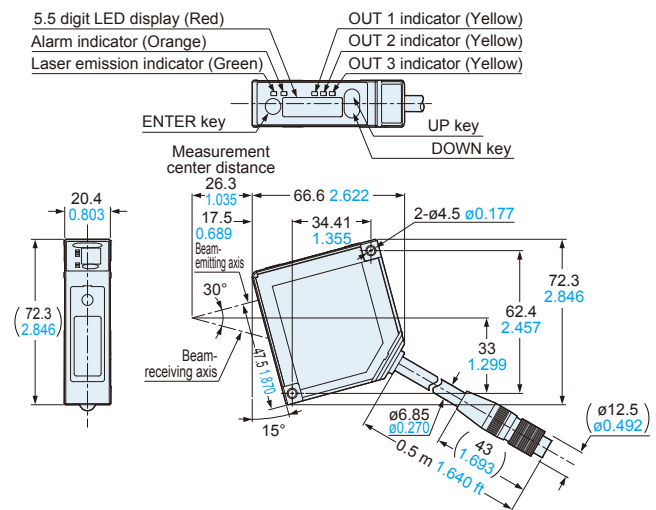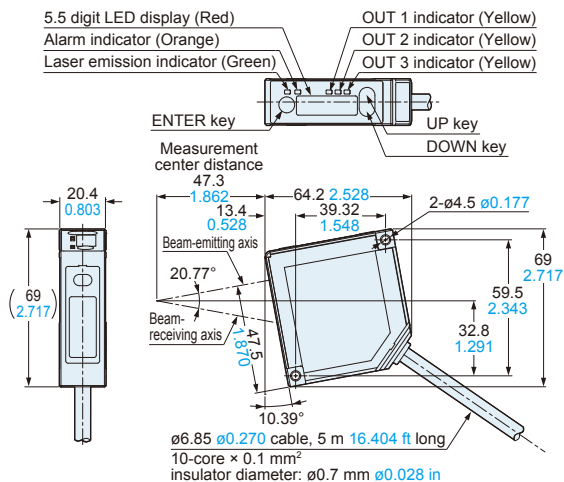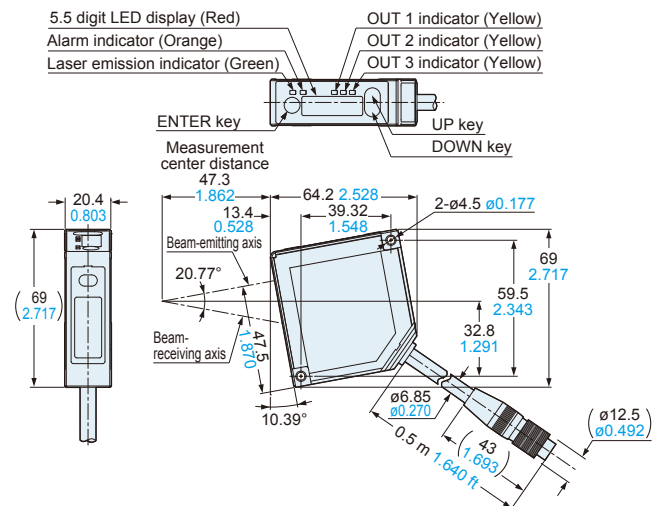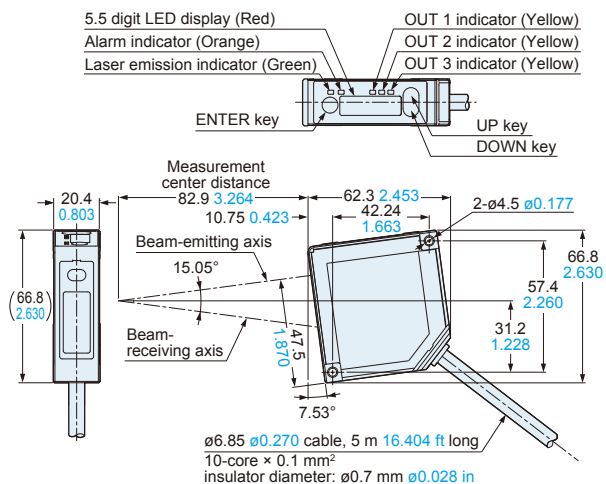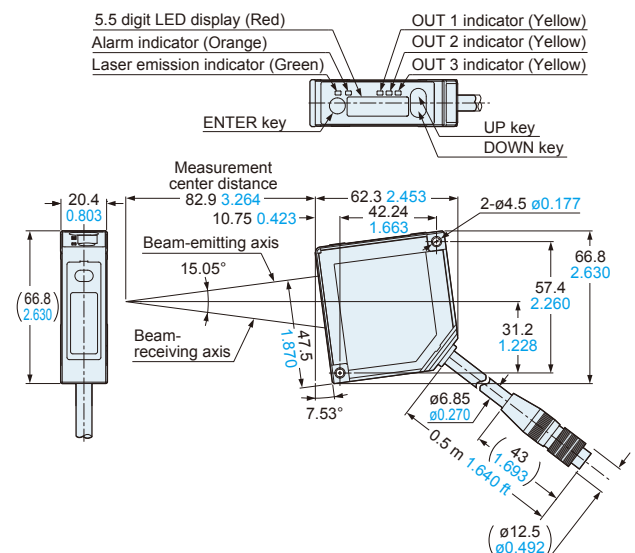HL-G103A-RA-C5 Sensor (Specular reflection / Standard type)**HL-G103A-RS-J** Sensor (Specular reflection / High function type)**HL-G105A-RA-C5** Sensor (Specular reflection / Standard type)**HL-G105A-RS-J** Sensor (Specular reflection / High function type)**HL-G108A-RA-C5** Sensor (Specular reflection / Standard type)**HL-G108A-RS-J** Sensor (Specular reflection / High function type)

Disclaimer

The applications described in the catalog are all intended for examples only. The purchase of our products described in the catalog shall not be regarded as granting of a license to use our products in the described applications. We do NOT warrant that we have obtained some intellectual properties, such as patent rights, with respect to such applications, or that the described applications may not infringe any intellectual property rights, such as patent rights, of a third party.

Panasonic
INDUSTRY

Panasonic Industry Co., Ltd.

Industrial Device Business Division

7-1-1, Morofuku, Daito-shi, Osaka 574-0044, Japan

industry.panasonic.com