




ENGLISH

## Product Datasheet


# KY 30-05 WIRE 250V,22AWG 7/0.25mm TC

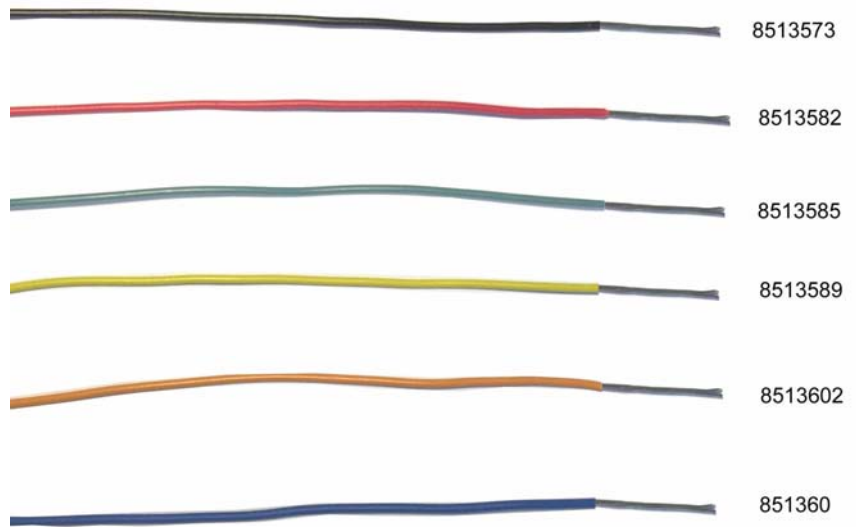

RoHS✓



**Cross Section:**



**Characteristics:**

**Relevant Standards:** NFC 93521 & NFC 32070/C1

**Operating Voltage:** 250 V

**Operating Temperature (°C):** -40 to 105 °C

**Applications:** These wires are mainly designed for internal wiring in electronic equipment.

**Construction:**

**Inner Conductor:** Tinned plated copper

**Insulation:** PVC

**Marking:** No

**Specification:**

Conductor				Overall Diameter (mm)		Conductor resistance (Ω/Km, at 20°C)	Mass
Size AWG	Area (mm <sup>2</sup> )	O/D (mm)	Stranding (mm)	Min.	Max.	Max.	Average (Kg/Km)
22	0.34	0.75	7/ 0.25	1.2	1.45	59.4	4.3

**Product Range:**

**RS Code**

8513573

8513582

8513585

8513589

8513602

8513605

**Description**

**KY30-05 BLACK,250M/PAPER REEL**

**KY30-05 RED,250M/PAPER REEL**

**KY30-05 VERT(GREEN),250M/PAPER REEL**

**KY30-05 YELLOW,250M/PAPER REEL**

**KY30-05 ORANGE,250M/PAPER REEL**

**KY30-05 BLUE,250M/PAPER REEL**