



Benefits

- No external driver required which facilitates easy installation and maintenance
- Delivers uniform light distribution
- IP44 rated diffuser versions for damp locations such as bathrooms and kitchens

Application



Model	Item Description	W	PF	lm	lm/W	CRI	Beam	Temp	Single Box (LxWxH)mm	Outer Box (LxWxH)mm	Packing Qty (PCS/CTN)
F26300RC-d/WH	SIENA 6" R150 21.5W 2800K DIM 90D WH	21.5	0.9	1560	72	80	90°	25000	180*180*120	560*390*500	24

Technical Specifications	
CRI	80
Colour Consistency (SDCM)	≤ 6
Dimmable	Yes
Housing Colour	White
IP	IP44
IK	IK02
Driver integrated (Yes/No)	Yes


Electrical Supply	
Frequency (Hz)	50/60Hz
Voltage (V)	220V-240V
AC/DC	AC

Mechanical Properties	
Optical Material	PP
Housing Material	PC

Application Conditions	
Operating Temperature	-20°C~40°C
Application Temperature	20°C
Storage Environment	-20°C~40°C

Photometric Data

F26300RC-d/WH

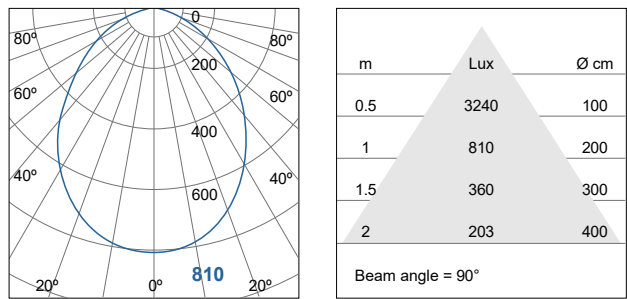

Dimensional Drawing

