




ENGLISH

## Datasheet

### 3.5mm PCB Terminal Block

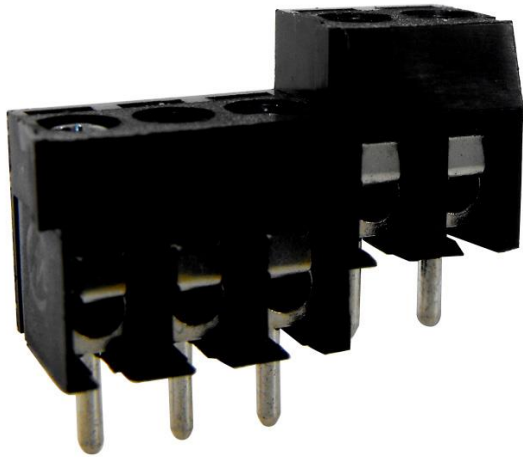

#### SPECIFICATION

Rating: 6A/300V

Dielectric strength: 1.5kV

Working temperature: 105°C

Moulding: UL94-V0 flame retardant PA

Pin/terminal: Tinned, nickel plated copper flash brass

Screw/torque: 3.35mm, tolerance +/- 0.2

Pin Length: M2 steel zinc plated, 0.4Nm max

Recommended PCB hole size:  $\varnothing$ 1.2mm

#### FEATURES

- Ultra low profile
- Stainless steel wire protector
- 2-12 pole interlocking
- 4-12 pole pre-assembled
- UL94-V0 flame retardant PA
- Double interlock mechanism for increased strength
- 1mm<sup>2</sup> cable entry
- Anti solder wicking terminals
- Captive screws
- Special Pin Length 3.35mm
- Guided pin alignment
- RoHS approved

Type No.	Poles	Length
8971339	4	14mm
8971357	9	31.5mm
8971351	10	35mm
8971360	11	38.5mm
8971363	12	42mm

