




Commercial Products & Solutions

 [SITE SEARCH](#)
[HOME](#)[PRODUCTS](#)[EDUCATION / RESOURCES](#)[LIGHTING APPLICATIONS](#)[Where to Buy](#) | [FAQs](#) | [Contact Us](#) | [EliteNet](#)[Products](#) > 13252**13252 – LU150/MED/ECO**

GE Lucalox® High Pressure Sodium B17


**GENERAL CHARACTERISTICS**

| | |
|---------------------------|-------------------------------------------------|
| Lamp type | High Intensity Discharge - High Pressure Sodium |
| Bulb | B17 |
| Base | Medium Screw (E26) |
| Bulb Finish | Clear |
| Wattage | 150 |
| Rated Life (MIN) | 24000 hrs |
| Bulb Material | Hard glass |
| Lamp Enclosure Type (LET) | Open or enclosed fixtures |
| LEED-EB MR Credit | 43 picograms Hg per mean lumen hour |



Bulb

Base

[View Larger](#)**PHOTOMETRIC CHARACTERISTICS**

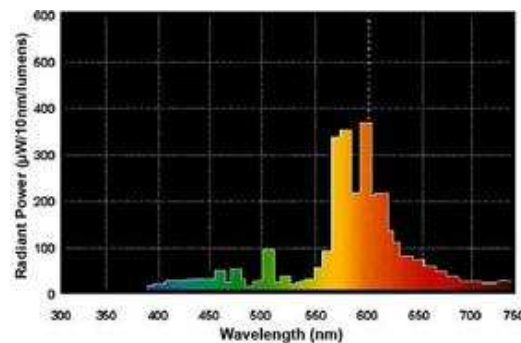
| | |
|---------------------------------|----------------------------|
| Initial Lumens | 16000 |
| Mean Lumens | 14400 |
| Nominal Initial Lumens per Watt | 106 |
| Color Temperature | 2000 K |
| Color Rendering Index (CRI) | 22 |
| Effective Arc Length | 1.570000 in (39.878000 mm) |

ADDITIONAL RESOURCES[Catalogs](#)[Testimonials](#)[MSDS \(Material Safety Data Sheets\)](#)[Disposal Policies & Recycling Information](#)**ELECTRICAL CHARACTERISTICS**

| | |
|----------------------------------------------|----------------------------|
| Burn Position | Universal burning position |
| Open Circuit Voltage (RMS lag ballast) (MIN) | 110 V |
| Warm Up Time to 90% (MIN) | 3 min |
| Warm Up Time to 90% (MAX) | 4 min |
| Hot Restart Time to 90% (MAX) | 0.670 min |

DIMENSIONS

| | |
|------------------------------|----------------------|
| Maximum Overall Length (MOL) | 5.7500 in (146.0 mm) |
| Nominal Length | 5.750 in (146.0 mm) |
| Bulb Diameter (DIA) | 2.125 in (53.9 mm) |
| Light Center Length (LCL) | 3.500 in (88.9 mm) |

PRODUCT INFORMATION**GRAPHS & CHARTS****Spectral Power Distribution**

| | |
|----------------------------------|----------------|
| Product Code | 13252 |
| Description | LU150/MED/ECO |
| ANSI Code | S55 |
| Standard Package | Case |
| Standard Package GTIN | 10043168132524 |
| Standard Package Quantity | 6 |
| Sales Unit | Unit |
| No Of Items Per Sales Unit | 1 |
| No Of Items Per Standard Package | 6 |
| UPC | 043168132527 |

COMPATIBLE GE BALLASTS

| Product Code | Description | # of Bulbs | Power Factor | Ballast Factor |
|-----------------------|-----------------|------------|--------------|----------------|
| 86606 | 1233154U000I | 1 | 90.0 | 1.0 |
| 87087 | GES15048TLC3D-5 | 1 | 90.0 | 1.0 |
| 87094 | GES150MLTLC3D-5 | 1 | 90.0 | 1.0 |

 CAUTIONS & WARNINGS

[See list of cautions & warnings.](#)

[Return To Top](#)

Home | Products | EliteNet | Education/Resources | Lighting Applications | Where to Buy | FAQs | Contact Us | Site Map
 Products for Your Home | Press Room | Corporate | Investor Information | Privacy Policy | Accessibility Statement | Terms of Use

Copyright General Electric Company 1997-2009