



Toll Free: 87 PERMATEX  
(877-376-2839)

10 Columbus Blvd., Hartford,  
Connecticut 06106

6875 Parkland Boulevard, Solon  
Ohio 44139

## Technical Data Sheet

# Permatex® Heavy Duty Rubberized Undercoating

AAM Revised 11/15

### PRODUCT DESCRIPTION

Permatex® Heavy Duty Rubberized Undercoating is specially formulated to protect automotive underbodies from corrosion. The product dries to a firm, flexible, tack-free film has good abrasion resistance and effective sound-deadening properties. Rubberized for maximum thickness, durability and flexibility.

### PRODUCT BENEFITS


- Seals
- Resists chipping
- Insulates

### TYPICAL APPLICATIONS

- Automotive frames and under-bodies
- Rocker panels
- Wheel wells
- Rust holes
- Gutters, roofs, drain systems
- Driveway cracks
- Post preserving

### DIRECTIONS FOR USE

1. Provide adequate ventilation.
2. For best results, apply to clean, dry surfaces.
3. Tap bottom of can to loosen the ball agitator. Shake can for 2 minutes. For best results, aerosol can should be at room temperature before spraying.
4. Apply a uniform coating holding the can 10 to 12 inches from the surface to be coated.

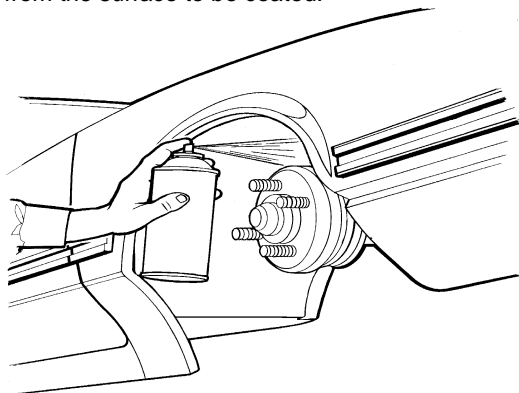

5. Multiple coatings are effective. Allow 15 to 20 minutes between coats. Recommend a minimum of 2 coats.

**Note: Avoid spraying product on exhaust system.  
This product is NOT considered paintable.**

### For Cleanup

1. Turn can upside-down and spray to clear nozzle.
2. Excess material can be removed with mineral sprits.
3. Clean hands with Permatex® brand hand cleaners.

### PROPERTIES OF MATERIAL

	Typical Value
Chemical Type	Rubber
Appearance	Brown to black flim
Odor	Alcohol
Flash Point	Aerosol, contents under pressure, consult MSDS
NFPA 704 Flammability Rating	4 (Highly Flammable)

### GENERAL INFORMATION

**This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected for use with chlorine or other strong oxidizing materials.**

**For safe handling information on this product, consult the Material Safety Data Sheet, (MSDS).**

### ORDERING INFORMATION

Part Number	Container Size
81833 (135EA)	20 oz. aerosol can

### STORAGE

Products shall be ideally stored in a cool, dry location in unopened containers at a temperature between 8° to 28°C (46° to 82°F) unless otherwise labeled. Optimal storage is at the lower half of this temperature range.

### NOTE

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. **Permatex, Inc. specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Permatex, Inc. products and disclaims any liability for consequential or incidental damages of any kind, including lost profits.** This product may be covered by one or more United States or foreign patents or patent applications.

NOT FOR PRODUCT SPECIFICATIONS.  
THE TECHNICAL DATA CONTAINED HEREIN ARE INTENDED AS REFERENCE ONLY.  
PLEASE CONTACT PERMATEX, INC., TECHNICAL SERVICE DEPARTMENT FOR ASSISTANCE AND RECOMMENDATIONS FOR YOUR SPECIFIC APPLICATION.  
PERMATEX, INC., HARTFORD SQUARE NORTH, 10 COLUMBUS BOULEVARD, HARTFORD, CT 06106 PHONE - (1-87PERMATEX)