

Product Datasheet

# PA TERMINAL BLOCKS WITH WIRE PROTECTOR



## Specification

**HOUSING: POLYAMIDE (PA 66)**

**INSERTS: NICKEL PLATED BRASS**

**SCREWS: GALVANISED STEEL**

**TEMP.: 105 °C**

**COLOR: NATURAL**

**Standard: VDE**

## Features:

**SEMI-RIGID;**

**FLAME RETARDANT;**


**HIGH TEMPERATURE;**

**ALL SCREWS ARE CAPTIVE & RAISED FOR EASY WIRING;**

**WITH WIRE PROTECTORS**



# Dimensions

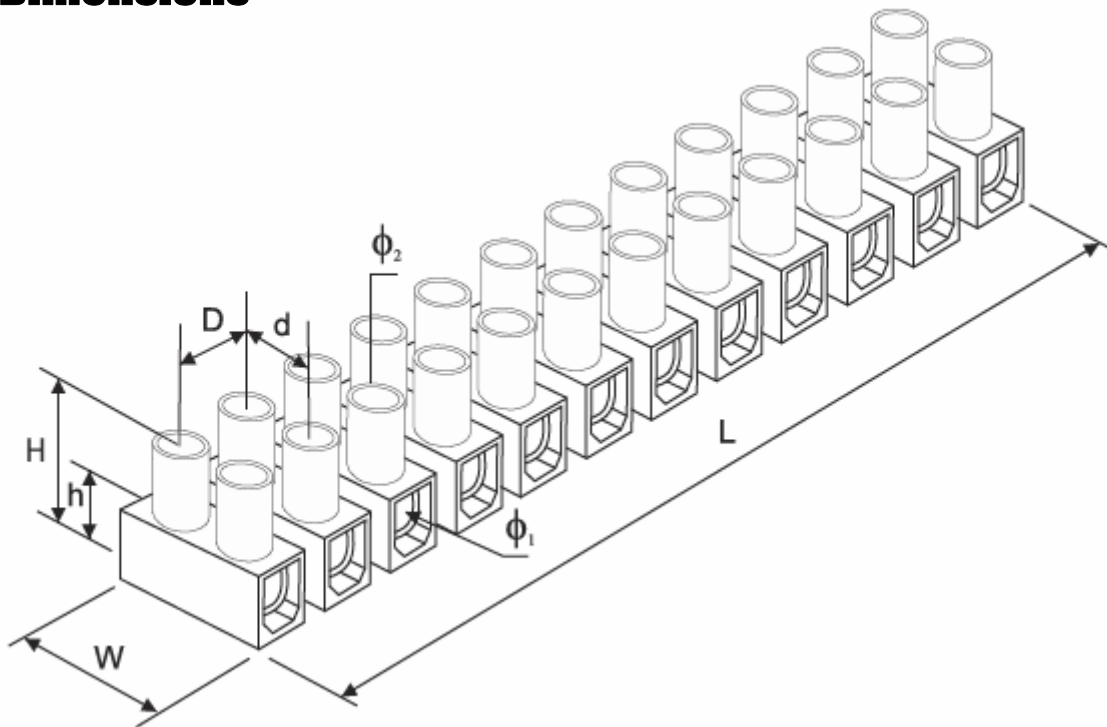

RS CODE	CROSS SECTION	CURRENT RANGE	RATED VOLTAGE	DIMENSIONS (mm)							
				W	L	Φ1	Φ2	D	d	H	h
8407954	1.5 mm <sup>2</sup>	17.5A	450V	18	94	2.8	2.5	7.2	5.6	13	7
8407957	2.5 mm <sup>2</sup>	24A	450V	20	115	3.5	3.2	10	8	15	8
8407951	4 mm <sup>2</sup>	32A	450V	24	138	4.2	3.5	12	9.5	19	10
8407960	6 mm <sup>2</sup>	41A	450V	26	156	5	4.2	14	11	25	15

**Cross Section:** rated for rigid wire and cables (if for flexible wire, it should be reduced one-step, i.e. 6mm<sup>2</sup> is 4mm<sup>2</sup>)  
**Φ1** wire entry hole diameter **Φ2** fixing hole diameter