


# 2.54mm PCB Receptacle with Cap

## Single Row, Vertical, 7.5mm Height, SMD Type

**multicomp** PRO

**RoHS  
Compliant**

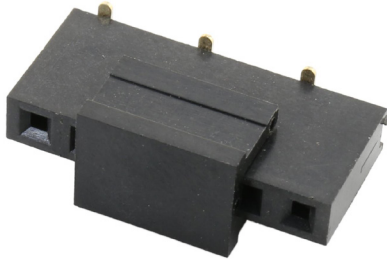


### Specifications

Current Rating	: 3A AC/DC
Voltage Rating	: 250V AC/DC
Contact Resistance	: 20mΩ Max.
Insulation Resistance	: 1000MΩ Min.
Withstanding Voltage	: 600V AC for one minute
Operating Temperature Range	: -40°C to +105°C

### Materials and Finish

Insulator	: High Temp. Plastic (Nylon 9T UL94V-0)
Insulator Colour	: Black
Contact Material	: Phosphor Bronze
Finish	: Gold/Tin Plated

### Diagram

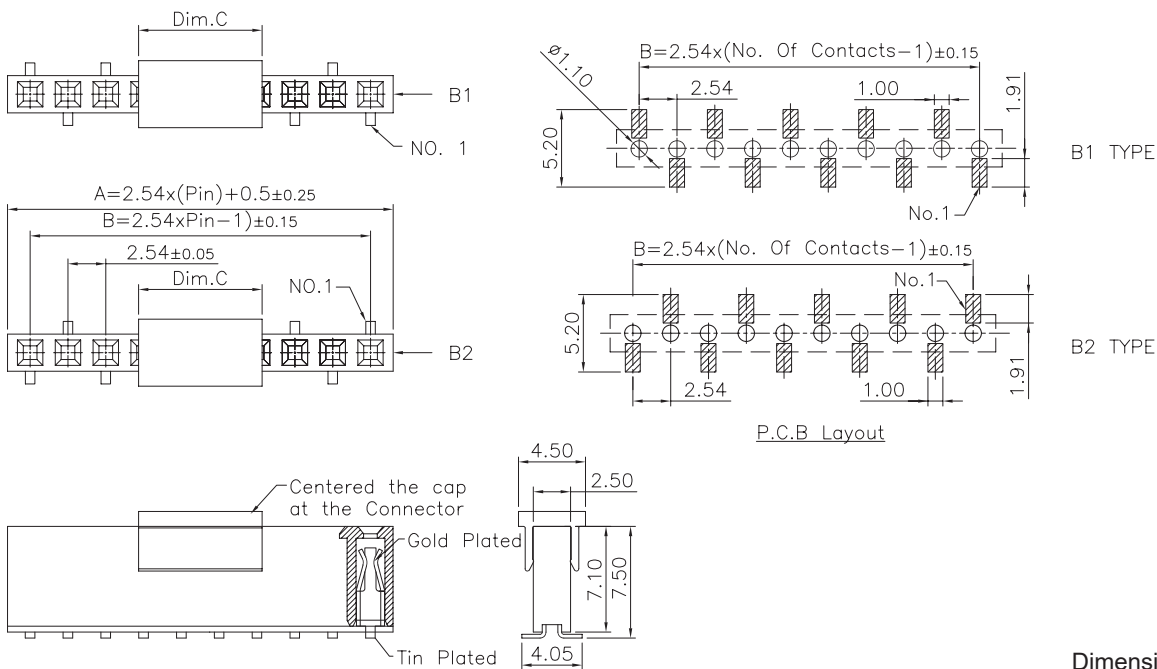

Dimensions : Millimetres

### Solderability Profile

#### Nylon 9T Material Temperature Specification

#### Solder regular Condition

Soldering temp.: 260°C±5°C

Time: 5±0.5 sec

Solder wetting percentage: 95% min


Newark.com/multicomp-pro  
Farnell.com/multicomp-pro  
Element14.com/multicomp-pro

**multicomp** PRO

# 2.54mm PCB Receptacle with Cap Single Row, Vertical, 7.5mm Height, SMD Type



## Reflow Condition

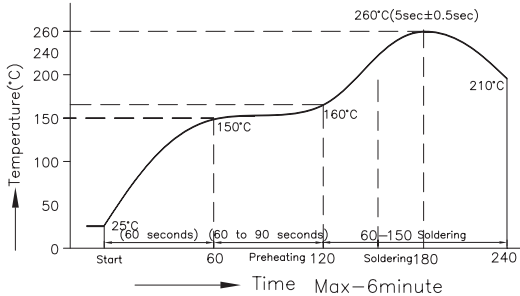

Nylon 9T Recommended Temperature Profile

## Test Conditions

- Solder Method: Reflow or Wave
- Environment: Room air
- Solder Composition: Soldering Paste
- Test Board: 52mm × 36.5mm × 1.6mm thick
- This temperature profile is based on the above conditions. Individual applications the actual temperature may vary. Consult your solder paste and equipment manufacturer for specific recommendations
- There must not be visible defect after testing

## Part Number Table

Description	Dimensions			Part Number
	A (mm)	B (mm)	C (mm)	
PCB Receptacle W/CAP, 2.54mm, Vertical, 7.5mm Height, 2POS, 1 Row, SMD	5.58	2.54	5.8	2212SM-02G-75-B1-PCR
PCB Receptacle W/CAP, 2.54mm, Vertical, 7.5mm Height, 3POS, 1 Row, SMD	8.12	5.08	5.8	2212SM-03G-75-B1-PCR
PCB Receptacle W/CAP, 2.54mm, Vertical, 7.5mm Height, 4POS, 1 Row, SMD	10.66	7.62	8.3	2212SM-04G-75-B1-PCR
PCB Receptacle W/CAP, 2.54mm, Vertical, 7.5mm Height, 5POS, 1 Row, SMD	13.2	10.16	5.8	2212SM-05G-75-B1-PCR
PCB Receptacle W/CAP, 2.54mm, Vertical, 7.5mm Height, 6POS, 1 Row, SMD	15.74	12.7	8.3	2212SM-06G-75-B1-PCR
PCB Receptacle W/CAP, 2.54mm, Vertical, 7.5mm Height, 7POS, 1 Row, SMD	18.28	15.24	5.8	2212SM-07G-75-B1-PCR
PCB Receptacle W/CAP, 2.54mm, Vertical, 7.5mm Height, 8POS, 1 Row, SMD	20.82	17.78	8.3	2212SM-08G-75-B1-PCR
PCB Receptacle W/CAP, 2.54mm, Vertical, 7.5mm Height, 9POS, 1 Row, SMD	23.36	20.32	5.8	2212SM-09G-75-B1-PCR
PCB Receptacle W/CAP, 2.54mm, Vertical, 7.5mm Height, 10POS, 1 Row, SMD	25.9	22.86	8.3	2212SM-10G-75-B1-PCR
PCB Receptacle W/CAP, 2.54mm, Vertical, 7.5mm Height, 12POS, 1 Row, SMD	30.98	27.94	8.3	2212SM-12G-75-B1-PCR
PCB Receptacle W/CAP, 2.54mm, Vertical, 7.5mm Height, 14POS, 1 Row, SMD	36.06	33.02	8.3	2212SM-14G-75-B1-PCR
PCB Receptacle W/CAP, 2.54mm, Vertical, 7.5mm Height, 18POS, 1 Row, SMD	46.22	43.18	8.3	2212SM-18G-75-B1-PCR
PCB Receptacle W/CAP, 2.54mm, Vertical, 7.5mm Height, 20POS, 1 Row, SMD	51.3	48.26	8.3	2212SM-20G-75-B1-PCR

**Important Notice :** This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro  
Farnell.com/multicomp-pro  
Element14.com/multicomp-pro

