

## **FEATURES**

- Insulation Resistance >= 100 MΩ
- Neoprene O-Ring
- Brass nickel plated coupling nut

# RS PRO M12 FEMALE STRAIGHT TO MALE STRAIGHT 4 PIN 4 WIRE 5m 0.34 sq. mm PVC SHIELDED CABLE

**RS Stock No.: 2500678** 



RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.



#### Product Description ATTRIBUTE 1

### M12 Connector Cable Assembly

Brought to you under the trusted RS Brand, this range of M12 connector cable assemblies are commonly used in sensor and automation equipment. Fitted with a secure coupling nut, these RS M12 cable assemblies are an ideal solution for when reliable data transference is needed.

The M12 connector boasts a high degree of environmental protection, and is ideal for industrial use, with applications ranging from process control to commercial electronics.

#### Features and Benefits:

- Insulation Resistance >= 100 MΩ
- Neoprene O-Ring
- Brass nickel plated coupling nut

#### **General Specifications**

Rated Operational Voltage	250 V
Current Rating	4A
Insulation Resistance	>= 100 MΩ
Temperature Range	-25°C +75°C
Tightening Torque	0.6 Nm
Coding	A-Coded

Material Specifications	
Grip Material	PU
Contact	Cu-Zn
Contact Plating	Gold Flash
Contact Carrier	Nylon 66
O-Ring	Neoprene
Grip Color	Black
Coupling Nut	Brass Nickel-Plated


#### **Cable Specifications**

Cable Length-L	5 m
Cable Type	4 Core PVC Shielded Multi Strand
Sheath Color	Black


# RS PRO M12 FEMALE TO MALE CONNECTOR



Cross Section of Wire	0.34 sq. mm
Core Dia	1.35 mm
Cable Dia	4.8 ± 0.1 mm
Shield Details	Polyester Tape (12 x 25 MIC)
	Braiding (16 x 4 x 0.12 mm)

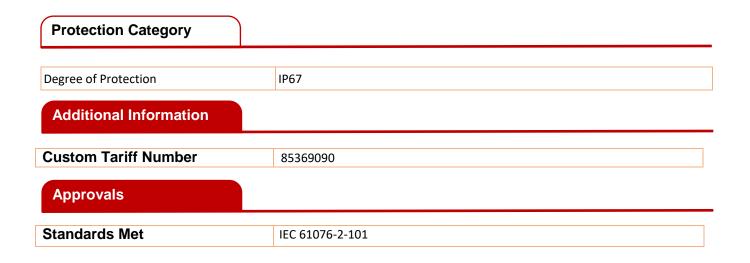

Connection Diagrams / Assembly Diagrams / Illustrations / Accessories

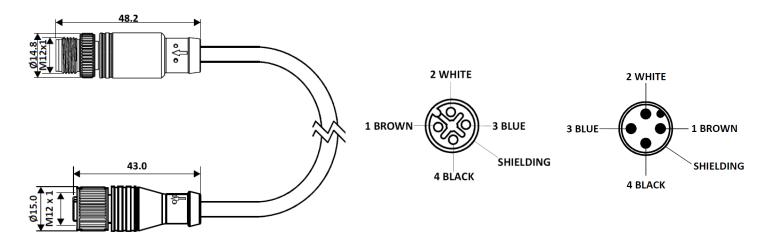

All Dimensions are in mm.