


FEATURES

- Mushroom pushbutton
- Chrome-plated Zamak body

RS PRO Non-Illuminated Push Button Complete Unit

RS Stock No.:
2398186

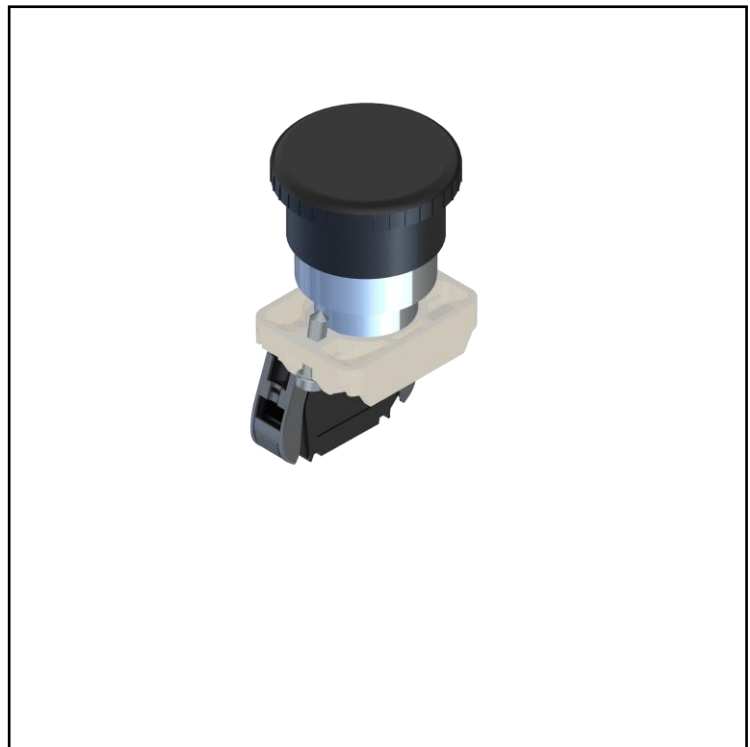

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Push Button Complete Units

Product Description

*Metallic operators and installation by means of metal screws, secure maximum mechanical resistance.
Heavy duty operators*

General Specifications

| | |
|---|---------------------------------|
| Casing Material | Chrome-plated Zamak |
| Operator | Mushroom pushbutton |
| Color | Black |
| Outer diameter | 40 |
| Microswitch | 1NO |
| Connecting Terminals | Screw with captive cable clamp |
| Connecting Cables Dimensions [mm ²] | 1 or 2 conductors - 0.5 ... 2.5 |

Mechanical Specifications

| | |
|--|-----------|
| Operating Temperatures [°C] | -25 / +70 |
| Stock Temperatures [°C] | -40 / +80 |
| Mechanical durability (Millions of operations) | 1 |
| B10d (million of operations) | 2 |
| Max. switching frequency [Cicli/h] | 3600 |

Electrical Specifications

| | |
|--|--|
| Protection against electrical shocks | Class II - Double insulation |
| Rated Insulating Voltage U_i [V] | 690 |
| Pollution Degree | 3 |
| Contact rating secondo UL508 | A 600 Q 300 |
| Rated impulsive voltage [kV] | 8 |
| Conventional thermal current in air free $I_{th} (\theta \text{ min } 40^\circ \text{ C})$ [A (θ) | 10 |
| Short circuit protection (EU min 500Vac - fuses type gG (gl)) [A] | 10 |
| Rated Operational Current I_e - AC-15 (50-60 Hz) [Vac - A] | 24V - 10A / 240V - 6A / 400V - 4A |
| Rated Operational Current DC-13 [Vdc - A] | 24V - 2,8A / 125V - 0.55A / 250V - 0.27A |
| Resistance Between Contacts [m Ω] | 25 |

Push Button Complete Units



Protection Category

| | |
|-------------------------|----------------------------------|
| IP Degree of Protection | 65 (front panel) 20 (rear panel) |
|-------------------------|----------------------------------|

Additional Information

| | |
|----------------------|---------------|
| EAN | 8000126233360 |
| Custom Tariff Number | 85371098 |

Approvals

| | |
|---------------|-------------------------|
| Declarations | CE – UKCA |
| Standards Met | EN 60947-5-1 and UL 508 |