Anti-Vandal Switches
Push Button

multicompPRO

Specifications

RoHS Compliant

Material

Case	: Dially Phthalate, Rated UL 94V-0
Cap	: Polyamide66
Bushing	: Polyamide66
Terminal / Contact	: Gold Over Silver Plated

Electrical

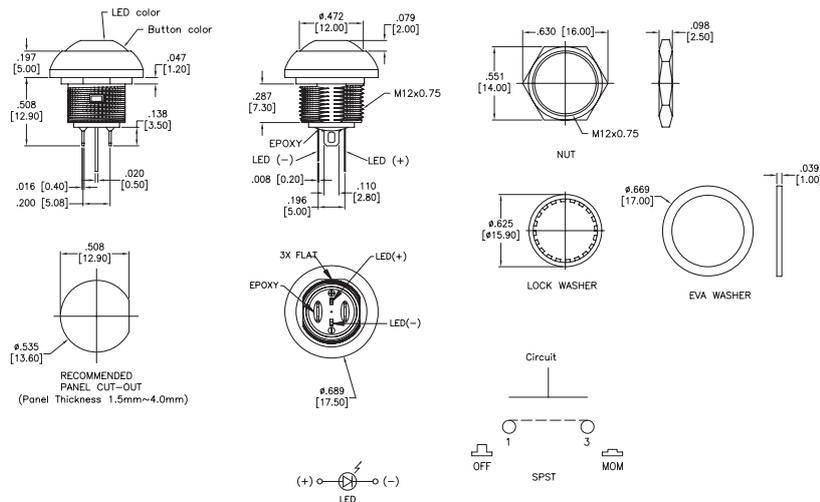|	
Switch Rating	: 400mA @ 32V AC
	100mA @ 50V DC
	125mA @ 125V AC
Contact Resistance	: 50mΩ max.
Insulation Resistance	: 1G–Ω min. @ 500V DC
Dielectric withstanding voltage	: 1000V RMS, 50Hz
Electrical Life	: 500,000 cycles min at full load

Temperature Rating

Operating temperature	: -30°C to +85°C

Environmental

Front Panel Protection	: IP67

Diagram

Dimensions : Millimetres

Part Number Table

Description	Button Colour	LED Voltage	Part Number
Anti Vandal Switch, SPST, Off-MOM, Solder Type	Red	10V	MP-PB11-2CSKR-10
	Green		MP-PB11-2CSKG-10

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

multicompPRO

Page <1>   04/04/23   V1.0