



EN

Datasheet

RS PRO HEAT SHRINKABLE FEMALE DISCONNECTORS

Stock number: **2055286**

MAXIMUM ELECTRIC CURRENT:

| | | | | |
|--------|----|----|----|----|
| A.W.G. | 22 | 20 | 18 | 16 |
| AMP. | 3 | 4 | 17 | 10 |

MAXIMUM ELECTRICAL RATING: 300 VOLTS MAX.

SHRINK TEMP. : 150°C


OPERATING TEMP. : -40°C~+105°C

INSULATION MATERIAL: HIGH DENSITY PE

TERMINAL MATERIAL: BRASS

TERMINAL SURFACE TREATMENT: TIN PLATED

INSULATION COLOR: RED

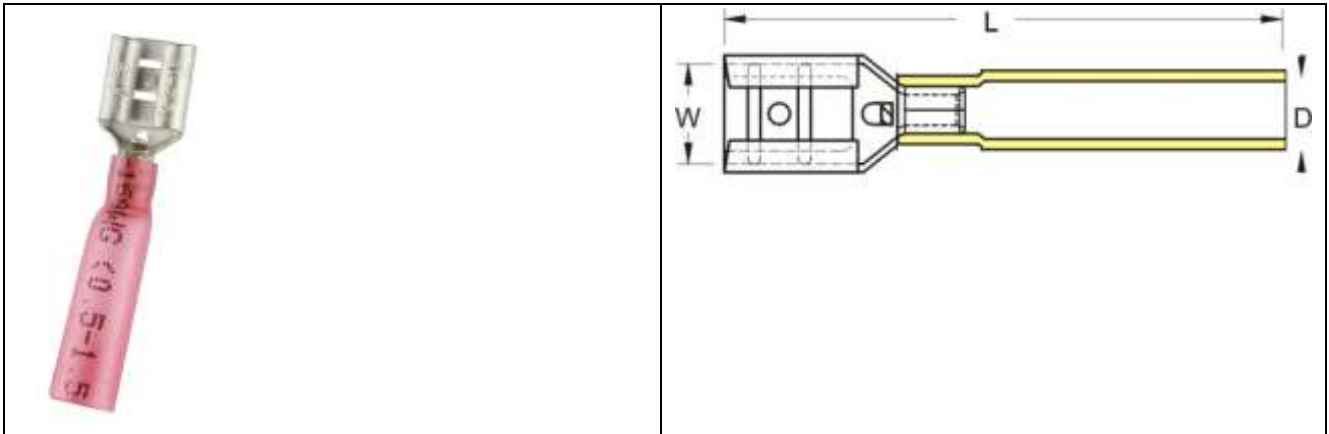

| WIRE RANGE A.W.G. mm ² | NEMA TAB | DIMENSION inch(mm) | | | INSULATED COLOR |
|---|-----------------------|--------------------|----------------|--------------|-----------------|
| | | W | D | L | |
| 22-16 A.W.G. 0.5-1.5 mm ² | .032X.250 0.8X6.35 | 0.26 6.6 | 0.217 5.500 | 1.22 31.0 | RED |