



## FEATURES

- INTEGRAL ROLLER LEVER ACTUATOR.
- MOULDED FROM GLASS FILLED FLAME RETARDANT THERMOPLASTIC(U L94V-0).
- CONFORM TO IEC 1508-1 STANDARD.

-  /  /  APPROVED.

# RS PRO Miniature Micro Switch

RS STOCK NUMBER - 2496862

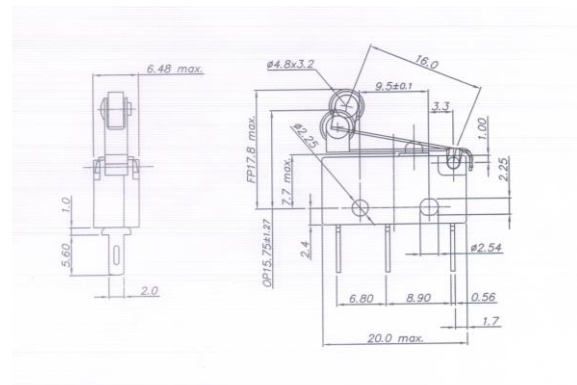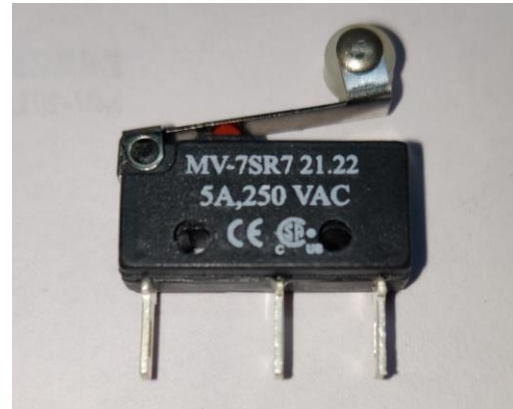

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

## Product Description ATTRIBUTE 1

- *Roller lever operated miniature micro switch.*
- *Single pole change over.*
- *Snap action mechanism.*
- *Fine silver contacts.*
- *Long mechanical and electrical life.*

## General Specifications

<b>Contact Configuration</b>	SPDT
<b>Contact Arrangement</b>	1No + 1NC, snap action.
<b>Contacts</b>	Fine silver contacts.
<b>Terminals</b>	Copper alloy, silver plated.
<b>Plunger</b>	Thermoplastic.
<b>Case</b>	Glass filled flame retardant thermoplastic(UL94-V0).

## Electrical Specifications

Electrical Rating		
	Load	Rating
	<b>AC(Resistive)</b>	5 A at 250V.
	<b>DC(Resistive)</b>	0.5 A at 125V or 0.25 A at 250V.
	<b>DC(Inductive)</b>	0.06 A at 125V or 0.03 A at 250V.
<b>Contact Resistance</b>		10 milliohms(max.).
<b>Insulation Resistance</b>		1000 Megaohms(min.).
<b>Dielectric Strength</b>		1 KV AC for one minute.
<b>Electrical life</b>		50,000 Operations.
<b>Mechanical life</b>		500,000 Operations.

## Mechanical Specifications

<b>Actuating Force (AF)</b>	50gms. (max).
<b>Release Force (RF)</b>	7gms. (min.).
<b>Free Position (FP)</b>	17.8mm. (max.).
<b>Operating Position (OP)</b>	15.75±1.27 mm.
<b>Pretravel</b>	2.05 mm.(max).
<b>Overtravel</b>	Plunger may depress to case.
<b>Movement Differential (MD)</b>	0.38 mm.(max),
<b>Mounting</b>	Switches should be mounted on a flat surface using two M2 or #2 unified thread screws.
<b>Unit Weight</b>	2.3gms. Approx.
<b>Salient Feature</b>	Integral lever with free running nylon roller actuator and 2 mm quick-connect tabs.

## Operation Environment Specifications

<b>Operating Temperature Range</b>	-10°C to +70°C.
------------------------------------	-----------------

## Protection Category

<b>IP Rating</b>	IP40(enclosure).
------------------	------------------

## Approvals

<b>Compliance/Certifications</b>	
----------------------------------	---