



Thermocouple Selection Guide

 uk.rs-online.com (UK)

 www.rs-components.com (International)

SELECTING SENSOR CABLES: GUIDE TO INSULATION & COVERING

Which insulation Material?	usable temperature range	Application Notes
PVC	-10°C to 105°C	Good general purpose insulation for 'light' environments. Waterproof and very flexible.
PFA (extruded)	-75°C to 250°C	Resistant to oils, acids other adverse agents and fluids. Good mechanical strength and flexibility. PTFE better for steam/elevated pressure environments
PTFE (taped & wrapped)	-75°C to 250/300°C	Resistant to oils, acids other adverse agents and fluids. Good mechanical strength and flexibility.
Glassfibre (varnished)	-60°C to 350/400°C	Good temperature range but will not prevent ingress of fluids. Fairly flexible but does not provide good mechanical protection.
High temperature glassfibre	-60°C to 700°C	Will withstand temperature up to 700°C but will not prevent ingress of fluids. Fairly flexible, not good protection against physical disturbance.
Ceramic Fibre	0 to 1000°C	Will withstand high temperature, up to 1000°C. Will not protect against fluids or physical disturbance.
Glassfibre (varnished) stainless steel overbraided	-60°C to 350/400°C	Good resistance to physical disturbance and high temperature (up to 400°C). Will not prevent ingress of fluids.

Screened or unscreened? With long cable runs, the cable may need to be screened and earthed at one end (at the instrument) to minimise noise pick-up (interference) on the measuring circuit. Alternative types of screened cable construction are available and these include the use of copper or mylar screening. Twisted pair configurations are offered and these can incorporate screening as required.

THERMOCOUPLE ACCURACIES

Tolerance classes for thermocouples to IEC 60584-1 : 2013 / BS EN 60584-1 : 2013

Fe-Con (J)	Class	Temperature Range	Accuracy	Symbol	Max Deviation
Fe-Con (J)	Class 1	- 40 +750°C:	±0.004	. t	or ±1.5°C
	Class 2	- 40 +750°C:	±0.0075	. t	or ±2.5°C
	Class 3	- -	-	-	-
Cu-Con (T)	Class 1	- 40 +350°C:	±0.004	. t	or ±0.5°C
	Class 2	- 40 +350°C:	±0.0075	. t	or ±1.0°C
	Class 3	-200 + 40°C:	±0.015	. t	or ±1.0°C
NiCr - Ni (K) and NiCrSi-NiSi (N)	Class 1	- 40 +1000°C:	±0.004	. t	or ±1.5°C
	Class 2	- 40 +1200°C:	±0.0075	. t	or ±2.5°C
	Class 3	-200 + 40°C:	±0.015	. t	or ±2.5°C
NiCr-Con (E)	Class 1	- 40 +800°C:	±0.004	. t	or ±1.5°C
	Class 2	- 40 +900°C:	±0.0075	. t	or ±2.5°C
	Class 3	-200 + 40°C:	±0.015	. t	or ±2.5°C
Pt10Rh-Pt (S) and Pt13Rh-Pt (R)	Class 1	0 +1600°C:	1 for $t < 1100^{\circ}\text{C}$, [1 + 0,003 x (t - 1100)] for $t > 1100^{\circ}\text{C}$. t	or ±1.0°C
	Class 2	0 +1600°C:	±0.0025	. t	or ±1.5°C
Pt30Rh-Pt6Rh (B)	Class 1	- -	-	-	-
	Class 2	+600 +1700°C:	±0.0025	. t	or ±1.5°C
	Class 3	+600 +1700°C:	±0.005	. t	or ±4.0°C

Note: t = actual temperature Use the larger of the two deviation values

COLOUR CODES: THERMOCOUPLE CONNECTORS, EXTENSION AND COMPENSATING WIRES AND CABLES

TYPE	CONDUCTORS +/-	INSULATION COLOUR CODES Extension & Compensating Leads			CABLE CODE
		BRITISH BS1843: 1952	FORMER STANDARD AMERICAN ANSI/MC 96.1	GERMAN DIN 43713 / 43714	
EX	NICKEL CHROMIUM/CONSTANTAN (Nickel Chromium/Copper Nickel, Chromel/Constantan, T1/Advance, NiCr/Constantan)				EX
J	IRON*/CONSTANTAN (Iron/Copper Nickel, Fe/Konst Iron/Advance, Fe/Constantan I/C)				JX
K	NICKEL CHROMIUM/NICKEL ALUMINIUM* (NC/NA, Chromel/ Alumel, C/A, T1/T2, NiCr/Ni, NiCr/ NiAl)				KX
N	NICROSIL/NISIL				NX NC
T	COPPER/CONSTANTAN (Copper/Copper Nickel, Cu/Con, Copper/Advance)				TX
Vx	COPPER/CONSTANTAN (LOW NICKEL) (Cu/Constantan) Compensating for K (Cu/Constantan)				KCB
U	COPPER/COPPER NICKEL Compensating for Platinum 10% or 13% Rhodium/Platinum (Codes S & R respectively) (Copper/Cupronic Cu/CuNi, Copper/No. 11 Alloy)				RCA SCA
* Magnetic, () Alternative & Trade Name		FOR THERMOCOUPLE CONNECTORS body colours are similar to outer sheath colours		FOR THERMOCOUPLE CONNECTORS body colours are similar to outer sheath colours	

CALIBRATION GUIDE


Thermocouple Type	emf in absolute millivolts (IEC 584)					
	100°C	400°C	800°C	1000°C	1200°C	1500°C
T	4.279	20.872	-	-	-	-
E	6.319	28.946	61.017	76.373	-	-
J	5.269	21.848	45.494	57.953	69.553	-
K	4.096	16.397	33.275	41.276	48.838	-
N	2.774	12.974	28.455	36.256	43.846	-
R	0.647	3.408	7.950	10.506	13.228	17.451
S	0.646	3.259	7.345	9.587	11.951	15.582
B	0.033	0.787	3.154	4.834	6.786	10.099

	Thermocouple	Platinum Resistance	Thermistor
Sensor	Thermoelement, two dissimilar metals/alloys	Platinum-wire wound or flat-film resistor	Ceramic (metal oxides)
Accuracy (typical values)	0.5 to 5.0°C	0.1 to 1.0°C	0.1 to 1.5°C
Long term Stability	Variable, Prone to ageing	Excellent	Good
Temperature range	-200 to 1750°C	-200 to 650°C	-100 to 300°C
Thermal response	Sheathed – slow Exposed tip – fast 0.1 to 10 secs typical	Wirewound – slow Film – faster 1-50 secs typical	generally fast 0.05 to 2.5 secs typical
Excitation	None	Constant current required	None
Characteristic	Thermovoltage	PTC resistance	NTC resistance (some are PTC)
Linearity	Most types non-linear	Fairly linear	Exponential
Lead resistance effect	Short cable runs satisfactory	3 & 4 wire – low. 2 wire – high	Low
Electrical “pick-up”	susceptible	Rarely susceptible	Not susceptible
Interface	Potentiometric input. Cold junction compensation required	Bridge 2,3 or 4 wire	2 wire resistance
Vibration effects/ shock	Mineral insulated types suitable	wirewound – not suitable. Film – good	Suitable
Output/ characteristic	From 10µV/°C to 40µV/°C depending on type	approx. 0.4 W/°C	-4% / °C
Extension Leads	Compensating cable	Copper	Copper
Cost	Relatively low cost	Wirewound – more expensive Film – cheaper	Inexpensive to moderate


Comments and values shown in this chart are generalised and nominal. They are not intended to be definitive but are stated for general guidance.

Sheathed Thermocouples - Measuring Junctions

Many alternative sheath materials are used to protect thermoelements, three alternative tip configurations are usually offered:

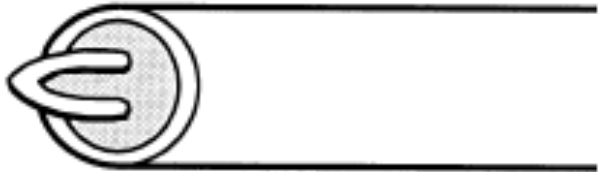

An exposed (measuring) junction is recommended for the measurement of flowing or static non-corrosive gas temperature when the greatest sensitivity and quickest response is required.

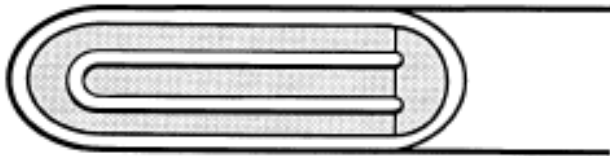

An insulated junction is more suitable for corrosive media although the thermal response is slower. In some applications where more than one thermocouple connects to the associated instrumentation, insulation may be essential to avoid spurious signals occurring in the measuring circuits.



An earthed (grounded) junction is also suitable for corrosive media and for high pressure applications. It provides faster response than the insulated junction and protection not afforded by the exposed junction.

The materials are made according to internationally accepted standards as laid down in IEC 584 1,2 which is based on the international Practical Temperature scale ITS 90. Operating temperature maxima are dependent on the conductor thickness of the thermoelements. The thermocouple types can be subdivided in 2 groups, base metal and rare (noble) metal:

-200°C up to 1200°C - These thermocouples use base metals

Type K - Chromel-Alumel: The best known and dominant thermocouple belonging to the group chromium-nickel aluminium is type K. Its temperature range is extended (-200 up to 1100°C). Its e.m.f./temperature curve is reasonably linear and its sensitivity is 41µV/°C

Type J - Iron-Constantan: Though in thermometry the conventional type J is still popular it has less importance in Mineral Insulated form because of its limited temperature range, - 200C to +750°C. Type J is mainly still in use based on the widespread applications of old instruments calibrated for this type. Their sensitivity rises to 55µV/°C.

Type E - Chromel-Constantan: Due to its high sensitivity (68µV/°C) Chromel-Constantan is mainly used in the cryogenic low temperature range (-200 up to +900°C). The fact that it is non magnetic could be a further advantage in some special applications.

Type N - Nicrosil-Nisil: This thermocouple has very good thermoelectric stability, which is superior to other base metal thermocouples and has excellent resistance to high temperature oxidation.

The Nicrosil-Nisil thermocouple is ideally suited for accurate measurements in air up to 1200°C. In vacuum or controlled atmosphere, it can withstand temperatures in excess of 1200°C. Its sensitivity of 39µV/°C at 900°C is slightly lower than type K (41µV/°C). Interchangeability tolerances are the same as for type K.

Type T - Copper-Constantan: This thermocouple is used less frequently. Its temperature range is limited to -200°C up to +350°C. It is however very useful in food, environmental and refrigeration applications. Tolerance class is superior to other base metal types and close tolerance versions are readily obtainable. The e.m.f./temperature curve is quite non-linear especially around 0°C and sensitivity is 42µV/°C.

0°C up to +1600°C - Platinum-Rhodium (Noble metal) Thermocouples

Type S - Platinum rhodium 10% Rh-Platinum: They are normally used in oxidising atmosphere up to 1600°C. Their sensitivity is between 6 and 12 µV/°C.


Type R - Platinum rhodium 13% Rh-Platinum: Similar version to type S with a sensitivity between 6 and 14µV/°C.

Type B - Platinum rhodium 30% Rh-Platinum rhodium 6% Rh: It allows measurements up to 1700°C. Very stable thermocouple but less sensitive in the lower range. (Output is negligible at room temperature).

Historically these thermocouples have been the basis of high temperature in spite of their high cost and their low thermoelectric power. Until the launching of the Nicrosil-Nisil thermocouples, type N, they remained the sole option for good thermoelectric stability.

Immersion

Thermocouple assemblies are “tip” sensing devices which lends them to both surface and immersion applications depending on their construction. However, immersion types must be used carefully to avoid errors due to stem conduction; this is heat flow to or from the sheath and into or away from the process which can result in a high or low reading respectively. A general rule is to immerse into the medium to a minimum of 4 times the outside diameter of the sheath; no quantitative data applies but care must be exercised in order to obtain meaningful results (e.g. have regard for furnace wall thickness and such like).

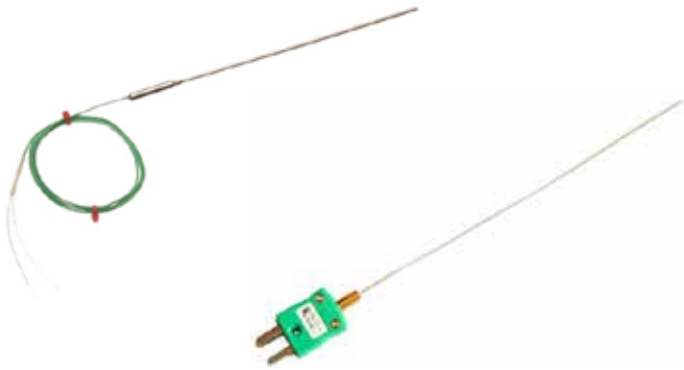

The ideal immersion depth can be achieved in practice by moving the probe into or out of the process medium incrementally; with each adjustment, note any apparent change in indicated temperature. The correct depth will result in no change in indicated temperature.

Surface Temperature Measurement

Although thermocouple assemblies are primarily tip sensing devices, the use of protection tubes (sheaths) renders surface sensing impractical. Physically, the probe does not lend itself to surface presentation and stem conduction would cause reading errors. If a thermocouple is to be used reliably for surface sensing, it must be in either exposed, welded junction form with very small thermal mass or be housed in a construction which permits true surface contact whilst attaching to the surface.



Locating a thermocouple on a surface can be achieved in various ways including the use of an adhesive patch, a washer and stud, a magnet for ferrous metals and pipe clips. Examples of surface sensing thermocouples are shown below:

Sheath Material	Max Continuous	Notes	Applications
Refractory Oxide recrystallised, e.g. Alumina Impervious	1750°C	Good choice for rare metal thermocouples. Good resistance to chemical attack. Mechanically strong but severe thermal shock should be avoided.	Forging iron & steel. Incinerators carburizing and hardening in heat treatment. Continuous furnaces. Glass Lehrs.
Silicon Carbide (Porous)	1500°C	Good level of protection even in severe conditions. Good resistance to reasonable levels of thermal shock. Mechanically strong when thick wall is specified but becomes brittle when aged. Unsuitable for oxidising atmospheres but resists fluxes.	Forging iron & steel. Incinerators Billet heating, slab heating, butt welding. Soaking pits ceramic dryers.
Impervious Mullite	1600°C	Good choice for rare metal thermocouples under severe conditions. Resists Sulphurous and carbonaceous atmospheres. Good resistance to thermal shock should be avoided.	Forging iron & steel. Incinerators. Heat treatment. Glass flues. Continuous furnaces.
Mild Steel (cold drawn seamless)	600°C	Good physical protection but prone to rapid corrosion.	Annealing up to 500°C. Hardening pre-heaters. Baking ovens.
Stainless steel 25/20	1150°C	Resists corrosion even at elevated temperature. Can be used in Sulphurous atmospheres.	Heat treatment annealing, flues, many chemical processes. Vitreous enamelling. Corrosion resistant alternative to mild steel.
Inconel 600/800*	1200°C	Nickel-Chromium-Iron alloy which extends the properties of stainless steel 25/20 to higher operating temperatures. Excellent in Sulphur free atmospheres; superior corrosion resistance at higher temperatures. Good mechanical strength.	Annealing, carburizing, hardening. Iron and steel hot blast. Open hearth flue & stack. Waste heat boilers. Billet heating, slab heating. Continuous furnaces. Soaking pits. Cement exit flues & kilns. Vitreous enamelling. Glass flues and checkers. Gas superheaters. Incinerators up to 1000°C. Highly sulphurous atmospheres should be avoided above 800°C.
Chrome Iron	1100°C	Suitable for very adverse environments. Good mechanical strength. Resists severely corrosive and sulphurous atmospheres.	Annealing, carburizing, hardening. Iron & steel hot blast. Open hearth flue and stack. Waste heat boilers. Billet heating, slab heating. Continuous furnaces. Soaking pits. Cement exit flues & kilns. Vitreous enamelling. Glass flues and checkers. Gas superheaters. Incinerators up to 1000°C.
Microbell*	1300°C	Highly stable in vacuum and oxidising atmospheres. Corrosion resistance generally superior to stainless steels. Can be used in Sulphurous atmospheres at reduced temperatures. High operating temperature.	As Inconel plus excellent choice for vacuum furnaces and flues.

* Tradenames

Sheath materials range from mild and stainless steels to refractory oxides (ceramics, so called) and a variety of exotic materials including rare metals. The choice of sheath must take account of operating temperature, media characteristics, durability and other considerations including the material relationship to the type of sensor.

Choosing between a Thermocouple and RTD Sensor

Thermocouples comprise a thermoelement which is a junction of two specific, dissimilar alloys and a suitable two wire extension lead. The junction is a short circuit only, the EMF is generated in the temperature gradient between the hot junction and the 'cold' or reference junction. This characteristic is reasonably stable and repeatable and allows for a family of alternative thermocouple types (e.g. J,K,T,N) to be used.

The alternative types are defined by the nature of the alloys used in the thermoelements and each type displays a different thermal EMF characteristic.

Resistance Thermometers utilise a high precision sensing resistor, usually platinum, the resistance value of which increases with temperature. The dominant standard adopted internationally is the Pt100 which has a resistance value of 100.0 Ohms at 0°C and a change of 38.50 Ohms between 0 and 100°C (the fundamental interval).

The platinum sensing resistor is highly stable and allows high accuracy temperature sensing. Resistance thermometer sensing resistors are 2 wire devices but the 2 wires will usually be extended in a 3 or 4 wire configuration according to the application, the associated instrumentation and accuracy requirements.

Thermocouples are, generally:

- Relatively inexpensive
- More rugged
- Less accurate
- More prone to drift
- More sensitive
- Tip sensing
- Available in smaller diameters
- Available with a wider temperature range
- More versatile

RTD's are, generally:

- More expensive
- More accurate
- Highly stable (if used carefully)
- Capable of better resolution
- Restricted in their range of temperature
- Stem, not tip sensitive
- Rarely available in small diameters (below 3mm)

In both cases, the choice of thermocouple or RTD must be made to match the instrumentation and to suit the application.

M.I. (Mineral Insulated) cable is used to insulate thermocouple wires from one another and from the metal sheath that surrounds them. MI Cable has two (or four when duplex) thermocouple wires running down the middle of the tube. The tube is then filled with magnesium oxide powder and compacted to ensure the wires are properly insulated and separated. MI cable helps to protect the thermocouple wire from corrosion and electrical interference.

- * Long stable life
- * Small size
- * Rapid response
- * Great mechanical strength
- * Water, oil & gas tight
- * Ease of installation
- * Adaptability
- * High insulation resistance
- * Low cost





A Plug Termination



B Plain Pot with Tails Termination



C Threaded Pot with Tails Termination

Image	Type	Probe Dia. (mm)	Probe Length(mm)	Sheath	Junction	Termination	Temperature Range	RS Order Code	Allied Code
A	K	0.5	150	310SS	Insulated	Miniature Plug	-40°C to +750°C	444-1275	70644212
A	K	1.0	250	310SS	Insulated	Miniature Plug	-40°C to +750°C	787-7765	70653223
A	K	3.0	500	310SS	Insulated	Miniature Plug	-40°C to +1100°C	787-7784	70653229

Image	Type	Probe Dia. (mm)	Probe Length(mm)	Sheath	Cable Type	Cable Length	Cable Colour	Temperature Range	RS Order Code	Allied Code
B	K	1.5	250	310SS	PFA 7/0.2mm	1 metre	Green	-40°C to +1100°C	397-1258	70643844
B	K	3.0	500	310SS	PFA 7/0.2mm	1 metre	Green	-40°C to +1100°C	787-7734	70653214
B	K	6.0	1000	310SS	PFA 7/0.2mm	1 metre	Green	-40°C to +1100°C	787-7753	70653219
B	J	1.5	150	321SS	PFA 7/0.2mm	1 metre	Black	-40°C to +1100°C	455-4270	70644364
B	J	3.0	250	321SS	PFA 7/0.2mm	1 metre	Black	-40°C to +1100°C	455-4309	70644367
B	J	6.0	250	321SS	PFA 7/0.2mm	1 metre	Black	-40°C to +1100°C	455-4321	70644369

Image	Type	Probe Dia. (mm)	Probe Length(mm)	Sheath	Cable Type	Cable Length	Cable Colour	Temperature Range	RS Order Code	Allied Code
C	K	1.5	150	310SS	PFA T/T 7/0.2mm	100mm	Green/White	-40°C to +1100°C	228-7445	70641663
C	K	3.0	250	310SS	PFA T/T 7/0.2mm	100mm	Green/White	-40°C to +1100°C	228-7489	70641666
C	K	4.5	500	310SS	PFA T/T 7/0.2mm	100mm	Green/White	-40°C to +1100°C	787-7854	70653314
C	K	6.0	1000	310SS	PFA T/T 7/0.2mm	100mm	Green/White	-40°C to +1100°C	219-4422	70641617

This is just a small selection of Mineral Insulated Thermocouples offered by RS / Allied



A Thermocouples with Compact KNS Terminal Head

B Thermocouple with Ceramic Plug Termination

Image	Type	Probe Dia. (mm)	Length (mm)	Sheath	Head Type	Block	Gland	Temperature Range	RS Order Code	Allied Code
A	K	6.0	100	310SS	KNS	2-way ceramic	M16 x 1.5mm Plated brass	-40°C to +1100°C	787-7804	70653235
A	K	6.0	150	310SS	KNS	2-way ceramic	M16 x 1.5mm Plated brass	-40°C to +1100°C	787-7813	70653302
A	K	6.0	200	310SS	KNS	2-way ceramic	M16 x 1.5mm Plated brass	-40°C to +1100°C	787-7816	70653303
A	K	6.0	250	310SS	KNS	2-way ceramic	M16 x 1.5mm Plated brass	-40°C to +1100°C	787-7810	70653301
A	K	6.0	300	310SS	KNS	2-way ceramic	M16 x 1.5mm Plated brass	-40°C to +1100°C	787-7829	70653306

Image	Type	Probe Dia. (mm)	Length (mm)	Sheath	Head Type	Termination	Probe Temperature Range	Plug Temperature Range	RS Order Code	Allied Code
B	K	1.0	150	310SS	KNS	Miniature ceramic plug + Socket	-40°C to +1100°C	650°C	872-2654	-
B	K	1.5	300	310SS	KNS	Miniature ceramic plug + Socket	-40°C to +1100°C	650°C	872-2660	-
B	K	3.0	150	310SS	KNS	Miniature ceramic plug + Socket	-40°C to +1100°C	650°C	872-2679	-
B	K	3.0	300	310SS	KNS	Miniature ceramic plug + Socket	-40°C to +1100°C	650°C	872-2672	-

This is just a small selection of Mineral Insulated Thermocouples offered by RS / Allied



A Magnet Thermocouple



B Button Magnet




C Magnetic Strip

Image	Type	Length	Cable	Termination	Temperature Range	RS Order Code	Allied Code
A	K	1 Metre	PFA Teflon® insulated with stainless steel over-braid	Miniature Plug	-50°C to + 250°C	131-4735	-
A	K	2 Metre	PFA Teflon® insulated with stainless steel over-braid	Miniature Plug	-50°C to + 250°C	762-1115	70651739

Image	Type	Length	Cable	Termination	Temperature Range	RS Order Code	Allied Code
B	K	1 Metre	PFA Teflon® insulated twin twisted	Miniature Plug	-50°C to + 250°C	236-4255	70641755
B	K	2 Metre	PFA Teflon® insulated twin twisted	Miniature Plug	-50°C to + 250°C	131-4736	-

Image	Type	Length	Cable	Termination	Temperature Range	RS Order Code	Allied Code
C	K	1 Metre	PFA Teflon® insulated twin twisted	Miniature Plug	-50°C to +100°C	131-4737	-
C	K	2 Metre	PFA Teflon® insulated twin twisted	Miniature Plug	-50°C to +100°C	219-4545	70641628

This is just a small selection of Fabricated and Specialist Thermocouples offered by RS / Allied

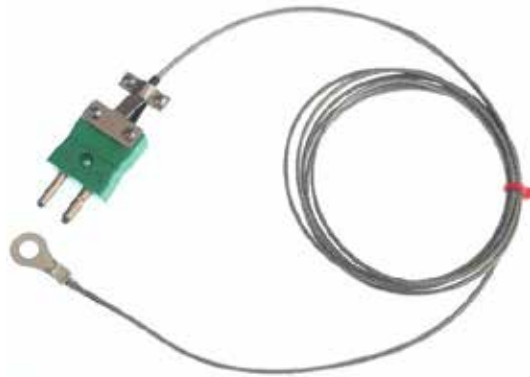

A Washer Thermocouple



B Nozzle Thermocouple



C Leaf Thermocouple

Image	Type	Length	Cable	Termination	Temperature Range	RS Order Code	Allied Code
A	K	2 Metre	Glassfibre insulated, stainless steel over braid	Standard Plug	-60°C to 350°C	131-4761	-
A	J	2 Metre	Glassfibre insulated, stainless steel over braid	Standard Plug	-60°C to 350°C	131-4744	-

Image	Type	Length	Cable	Termination	Temperature Range	RS Order Code	Allied Code
B	K	2 Metre	Glassfibre insulated, stainless steel over braid	Standard Plug	-60°C to 350°C	131-4745	-

Image	Type	Length	Cable	Termination	Temperature Range	RS Order Code	Allied Code
C	K	2 Metre	Glassfibre insulated, stainless steel over braid	Standard Plug	-60°C to 350°C	131-4746	-

This is just a small selection of Fabricated and Specialist Thermocouples offered by RS / Allied



A Bolt Thermocouple



B Bayonet Thermocouple



C Silicone Rubber Patch Thermocouple

Image	Type	Thread Pitch	Thread Length	Cable Length	Cable	Termination	Temperature Range	RS Order Code	Allied Code
A	K	M8 x 1mm	13mm	2 Metre	Glassfibre stainless steel over braided	Tails	Up to +250°C	872-2581	-
A	K	M10 x 1mm	25mm	2 Metre	Glassfibre stainless steel over braided	Tails	Up to +250°C	872-2597	-
A	K	M12 x 1mm	13mm	2 Metre	Glassfibre stainless steel over braided	Tails	Up to +250°C	872-2607	-
A	J	M8 x 1mm	13mm	2 Metre	Glassfibre stainless steel over braided	Tails	Up to +250°C	872-2569	-
A	J	M10 x 1mm	25mm	2 Metre	Glassfibre stainless steel over braided	Tails	Up to +250°C	872-2575	-
A	J	M12 x 1mm	13mm	2 Metre	Glassfibre stainless steel over braided	Tails	Up to +250°C	872-2584	-

Image	Type	Length	Cable	Spring	Termination	Temperature Range	RS Order Code	Allied Code
B	K	2 Metre	Glassfibre insulated, stainless steel over braid	170mm spring, adjustable cap	Standard Plug	-60°C to 350°C	131-4743	-
B	J	3 Metre	Glassfibre insulated, stainless steel over braid	170mm spring, adjustable cap	Standard Plug	-60°C to 350°C	131-4764	-

Image	Type	Length	Cable	Patch (mm)	Termination	Temperature Range	RS Order Code	Allied Code
C	K	1 Metre	Teflon® insulated, twin twist	40x13x5 (LxWxH)	Tails	-50°C to +150°C	290-5036	70642886

This is just a small selection of Fabricated and Specialist Thermocouples offered by RS / Allied



A PVC Extension Lead with Miniature Connectors



B PVC Extension Lead with Standard Connectors



C Glassfibre Extension Lead with Miniature Connectors

Image	Type	Length	Cable	Termination	Cable Temperature Range	RS Order Code	Allied Code
A	K	2 Metre	PVC Insulated, 7/0.2mm	Miniature Plug + Socket	-10°C to 105°C	768-6581	70652090
A	K	5 Metre	PVC Insulated, 7/0.2mm	Miniature Plug + Socket	-10°C to 105°C	768-6585	70652091

Image	Type	Length	Cable	Termination	Cable Temperature Range	RS Order Code	Allied Code
B	K	2 Metre	PVC Insulated, 7/0.2mm	Standard Plug + Socket	-10°C to 105°C	768-6626	70652103
B	K	5 Metre	PVC Insulated, 7/0.2mm	Standard Plug + Socket	-10°C to 105°C	768-6620	70652101

Image	Type	Length	Cable	Termination	Cable Temperature Range	RS Order Code	Allied Code
C	K	2 Metre	Glassfibre Insulated with SSOB, 7/0.2mm	Miniature Plug + Socket	-60°C to 350°C	779-9678	70652776
C	K	5 Metre	Glassfibre Insulated with SSOB, 7/0.2mm	Miniature Plug + Socket	-60°C to 350°C	779-9671	70652774

This is just a small selection of Extension Leads offered by RS / Allied



A 1/2"UNF-20 Melt Bolt Thermocouple with Type 'J' Thermocouple Plug



B Twist Melt Bolt Thermocouple with Standard Thermocouple Plug

Image	Type	Thread	Bolt Length	Tip Immersion Length	Temperature Range	Termination	RS Order Code	Allied Code
A	J	1/2"UNF-20	76mm (3" inch)	5.0mm (3.0mm diameter)	Up to +500°C	Standard plug	219-4731	70641639
A	J	1/2"UNF-20	152mm (6" inch)	5.0mm (3.0mm diameter)	Up to +500°C	Standard plug	353-4578	70642070

Image	Type	Thread	Bolt Length	Tip Immersion Length	Temperature Range	Termination	RS Order Code	Allied Code
B	J	1/2"UNF-20	152mm (6" inch)	20.0mm	Up to +400°C	Standard plug	872-2783	-
B	K	1/2"UNF-20	152mm (6" inch)	20.0mm	Up to +400°C	Standard plug	872-2792	-



A Type K PFA Exposed Junction with Miniature Plug



B Type J PFA Exposed Junction with Miniature Plug



C Type T PFA Exposed Junction with Miniature Plug

Image	Type	Conductors	RS Code	Allied Code	RS Code	Allied Code	RS Code	Allied Code	RS Code	Allied Code
			1 Metre		2 Metre		5 Metre		10 Metre	
A	K	1/0.315mm	123-6318	-	123-6319	-	762-1118	70651740	804-7886	70654802
A	K	7/0.2mm	123-6320	-	123-6321	-	762-1112	70651738	804-7880	70654800
A	K	1/0.2mm	123-6322	-	123-6323	-	804-7899	70654805	123-6324	-

Image	Type	Conductors	RS Code	Allied Code	RS Code	Allied Code	RS Code	Allied Code	RS Code	Allied Code
			1 Metre		2 Metre		5 Metre		10 Metre	
B	J	1/0.2mm	123-6325	-	123-6326	-	804-7883	70654801	123-6327	-

Image	Type	Conductors	RS Code	Allied Code	RS Code	Allied Code	RS Code	Allied Code	RS Code	Allied Code
			1 Metre		2 Metre		5 Metre		10 Metre	
C	T	1/0.315mm	123-6328	-	123-6329	-	762-1121	70651741	804-7892	70654803
C	T	7/0.2mm	123-6330	-	123-6331	-	762-1124	70651742	804-7896	70654804
C	T	1/0.2mm	123-6332	-	123-6333	-	804-7906	70654807	123-6334	-


This is just a small selection of Exposed Junctions offered by RS / Allied



A Type K PTFE Exposed Junction with Miniature Plug



B Type J PTFE Exposed Junction with Miniature Plug

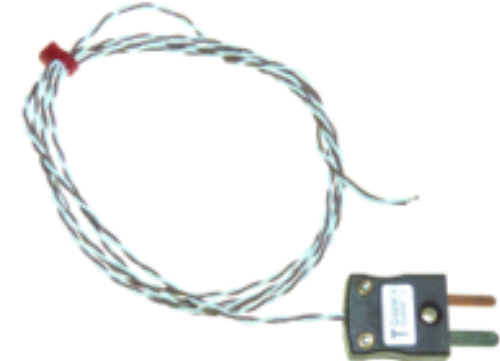

C Type T PTFE Exposed Junction with Miniature Plug

Image	Type	Conductors	RS Code	Allied Code	RS Code	Allied Code	RS Code	Allied Code	RS Code	Allied Code
			1 Metre		2 Metre		5 Metre		10 Metre	
A	K	1/0.2mm	363-0250	70643600	110-4482	-	123-6306	-	123-6307	-

Image	Type	Conductors	RS Code	Allied Code	RS Code	Allied Code	RS Code	Allied Code	RS Code	Allied Code
			1 Metre		2 Metre		5 Metre		10 Metre	
B	J	1/0.2mm	363-0244	70643599	123-6308	-	123-6309	-	123-6310	-

Image	Type	Conductors	RS Code	Allied Code	RS Code	Allied Code	RS Code	Allied Code	RS Code	Allied Code
			1 Metre		2 Metre		5 Metre		10 Metre	
C	T	1/0.2mm	363-0266	70643601	123-6311	-	123-6312	-	123-6313	-

This is just a small selection of Exposed Junctions offered by RS / Allied



A

Type K PFA Fine Gauge Exposed Junction with Miniature Plug

B

Type T PFA Fine Gauge Exposed Junction with Miniature Plug

Image	Type	Conductors	RS Code	Allied Code	RS Code	Allied Code	RS Code	Allied Code
			0.5 Metre		1 Metre		2 Metre	
A	K	1/0.076mm	804-7987	70654832	804-7981	70654830	804-7990	70654833

Image	Type	Conductors	RS Code	Allied Code	RS Code	Allied Code	RS Code	Allied Code
			0.5 Metre		1 Metre		2 Metre	
B	T	1/0.076mm	804-7993	70654834	804-7997	70654835	804-8000	70654836

This is just a small selection of Exposed Junctions offered by RS / Allied



A PFA Twin Twist Exposed Junction with Miniature Plug + Cable Tidy



B PFA Flat Pair Exposed Junction with Miniature Plug + Cable Tidy

Image	Type	Cable	RS Code	Allied Code	RS Code	Allied Code
			1 Metre		2 Metre	
A	K	PFA Twin Twist	110-4463	-	110-4467	-
A	T	PFA Twin Twist	110-4465	-	110-4469	-

Image	Type	Cable	RS Code	Allied Code	RS Code	Allied Code
			1 Metre		2 Metre	
B	K	PFA Flat Pair	110-4464	-	110-4468	-
B	T	PFA Flat Pair	110-4466	-	110-4470	-

This is just a small selection of Exposed Junctions offered by RS / Allied



A

PFA Twin Twist Exposed Junction with Miniature Plug + Cable Tidy



B

PFA Twin Twist Exposed Junction with Miniature Plug + Cable Tidy

Image	Type	Conductors	RS Code	Allied Code	RS Code	Allied Code	RS Code	Allied Code
			1 Metre		2 Metre		3 Metre	
A	K	1/0.3mm	131-4752	-	131-4753	-	131-4754	-
A	K	1/0.5mm	131-4755	-	131-4756	-	131-4757	-

Image	Type	Conductors	RS Code	Allied Code
			1 Metre	
B	K	1/0.2mm	363-0323	70643606
B	J	1/0.2mm	363-0317	70643605
B	T	1/0.2mm	363-0339	70643607

This is just a small selection of Exposed Junctions offered by RS / Allied

L60 Thermocouple & Fine Wire Welder



The Thermocouple Welder is a compact, simple-to-use instrument designed for thermocouple and fine wire welding

It is primarily designed for use by sensor manufacturers to produce commercial grade thermocouple junctions; it is ideal for producing large numbers of exposed junction thermocouples for test and development laboratories. The L60 Thermocouple Welder is ideally suited to transducer and RTD extension lead attachment

Use of the Thermocouple Welder does not require special skills and most operatives will be capable of producing quality work with little practice. The instrument is supplied with a full range of user accessories.

- Simple to use Thermocouple Welder
- Designed for the production of commercial grade thermocouple junctions
- Also suitable for other fine wire work
- Front panel or footswitch operation
- Argon gas shield facility

RS Code	Allied Code
363-0351	70825788

Digital Thermometer & Data Logger



The L200 thermocouple thermometer can be used in conjunction with a PC to provide accurate, versatile 8 channel thermocouple temperature measurement, scanning and logging of measured values. It can also be used as a “stand alone” indicator/logger and incorporates a digital display of measured temperature.

The in-built, self-calibration facility for the thermocouple version is a rapid and convenient method for on-site calibration and does not require any additional equipment other than a special, external link.

The L200 is designed to provide exceptional stability with high measurement resolution and represents an ideal crossover between plant practicality and laboratory performance at a very competitive price.

RS Code	Allied Code
910-6817	-

Information given here is for general guidance only and is not definitive – it is not intended to be the basis for product installation or decision making.

Q. What is the difference between a Mineral Insulated (MI) and a fabricated sheath?

A. An MI is flexible, a fabricated sheath is rigid.

Q. How accurately can I measure temperature using a standard sensor?

A. To published, internationally specified tolerances as standard, typically $\pm 2.5^{\circ}\text{C}$ for popular thermocouples, $\pm 0.5^{\circ}\text{C}$ for PRT. Higher accuracy sensors can be supplied to order, e.g. $\pm 0.5^{\circ}\text{C}$ for type T thermocouple, $\pm 0.2^{\circ}\text{C}$ for PRT. All of these values are temperature dependent. A close tolerance, 4-wire PRT will give best absolute accuracy and stability.

Q. How do I choose between a thermocouple and a PRT?

A. Mainly on the basis of required accuracy, probe dimensions, speed of response and the process temperature.

Q. My thermocouple is sited a long way from my controller, is this a problem?

A. It could be; try to ensure a maximum sensor loop resistance of 100 Ohms for thermocouples and 4-wire PRTs. Exceeding 100 Ohms could result in a measurement error. Note By using a 4-20mA transmitter near the sensor, cable runs can be much longer and need only cheaper copper wire. The instrument must be suitable for a 4-20mA input though.

Q. Should I choose a Type K or Type N thermocouple?

A. Generally, Type N is more stable and usually lasts longer than Type K; N is a better choice for high temperature work depending on the choice of sheath material.

Q. Does it matter what type of steel I specify for the thermocouple sheath?

A. Often no, sometimes yes. In some cases, reliability depends on the ideal choice of material.

Q. Are there other types of temperature sensor apart from thermocouple and PRT Types?

A. Several, but these two groups are the most common. Alternatives include thermistors, infra-red (non-contact), conventional thermometers (stem & dial types) and many others.

Q. Why are so many different types of thermocouple used?

A. They have been developed over many years to suit different applications world-wide.

Q. What is a duplex sensor?

A. One with two separate sensors in a single housing

Q. Why use a thermowell?

A. To protect the sensor from the process medium and to facilitate its replacement if necessary.

Q. I use many thermocouples in testing and experiments, can I make my own thermocouple junctions?

A. Yes, using a benchtop welder and fine thermocouple wires – it is easy and inexpensive to make unshielded thermocouples.

Q. Why should I use actual thermocouple connectors instead of ordinary electrical connectors?

A. Good quality thermocouple connectors use thermocouple alloys, polarized connections and colour coded bodies to guarantee perfect, error-free interconnections.

Q. I need to measure quickly changing temperature; what type of sensor should I use?

A. A fast-response (low thermal mass) thermocouple.

Q. There are several different types of extension cable construction; is the choice important?

A. Yes; some are waterproof, some mechanically stronger, some suitable for high or low temperature.

Q. Is a sensor with a calibration certificate more accurate than an uncalibrated one?

A. No. However, the errors and uncertainties compared with a reference sensor are published and corrected values can be used to obtain better measurement accuracy.

Q. How long will my sensor last in the process?

A. Not known but predictable in some cases; this will be a function of sensor type, construction, operating conditions and handling.

Q. Which thermocouple type do I need for my application?

A. This depends on several factors including the nature of the process, heated medium and temperature.

Q. What is the longest thermocouple I can have without losing accuracy?

A. Try to ensure a maximum sensor loop resistance of 100 Ohms for thermocouples and 4 wire PRTs. Exceeding 100 Ohms could result in a measurement error. Note By using a 4-20mA transmitter near the sensor, cable runs can be much longer and need only cheaper copper wire. The instrument must be suitable for a 4-20mA input though.

Q. Do I need a power supply when using a transmitter, and what length of extension lead can I run with a transmitter fitted?

A. A 24Vdc, 20mA supply will be needed if this is not incorporated in the measuring instrument. Long runs of copper cable can be used.

Q. What sensor will I need to work in molten metal or a corrosive atmosphere?

A. There is no simple answer but special grades of Stainless Steel, Inconel 600, Niobium and Ceramics offer alternatives.

Information given here is for general guidance only and is not definitive – it is not intended to be the basis for product installation or decision making.