

Datasheet

RS PRO NON-INSULATED RING TERMINALS

Stock number: 178-8606


MAXIMUM ELECTRIC CURRENT:

A.W.G. 16-14

AMP. 18-30

TERMINAL MATERIAL: COPPER

SURFACE TREATMENT: TIN PLATED

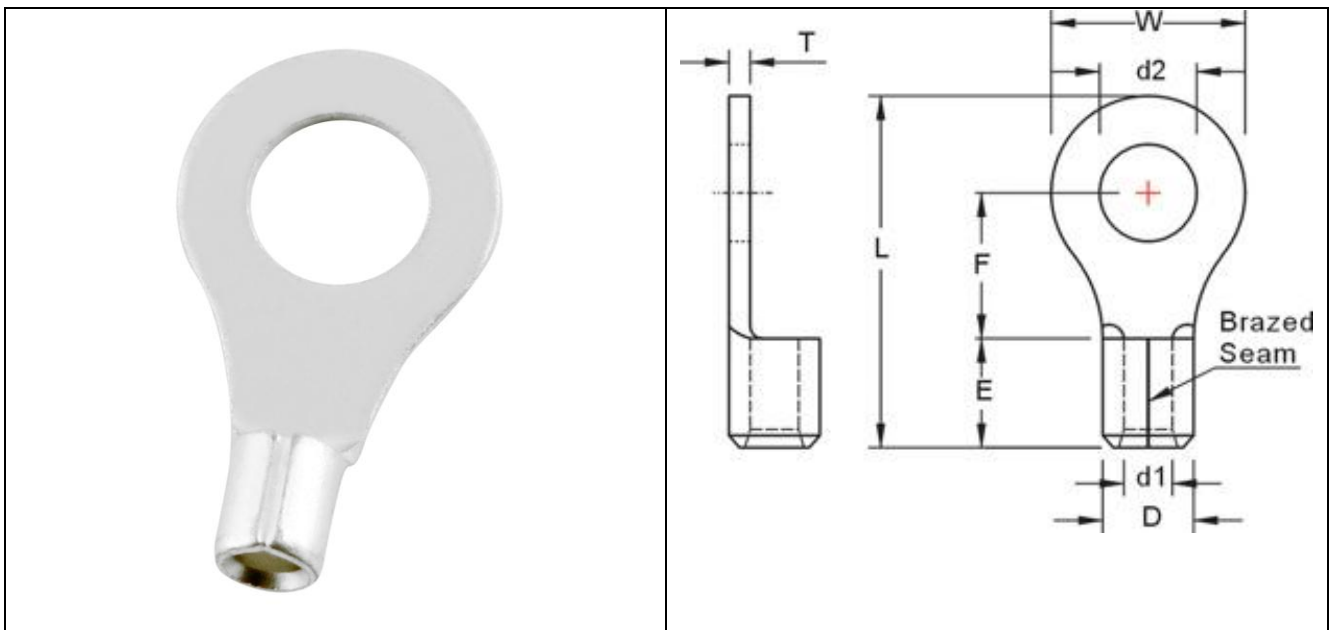

WIRE RANGE A.W.G. mm ²	ITEM NO. BRAZED SEAM	STUD SIZE 2 x d2	DIMENSION inch(mm)							
			W	F	L	E	D	d1	T	
16-14 A.W.G.	178-8606	5/16	0.331	0.472	0.433	0.858	0.189	0.161	0.091	0.031
1.5-2.5 mm ²			8.4	12	11	21.8	4.8	4.100	2.3	0.8