

1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC-4 GHz
- 1.2 NOMINAL IMPEDANCE: 50 OHMS
- 1.3 VOLTAGE RATING: 500 VOLTS MAX.

2.0 MATERIALS

- 2.1 BODIES: BRASS PER JIS-C3604
- 2.2 CENTER CONTACT: BRASS PER JIS-C3604
- 2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710

3.0 FINISHES AND OTHERS


- 3.1 SEE BELOW TABLE FOR DETAILS.

4.0 MECHANICAL


- 4.1 FOR USE WITH H551014 OR SIMILAR STYLE CABLE
- 4.2 CABLE ATTACHMENT: OUTER: CLAMP, INNER: SOLDER

5.0 ENVIRONMENTAL

- 5.1 OPERATING TEMPERATURE RANGE: -20° C TO +80° C



STRIPPING DIMENSION
SCALE 3:1

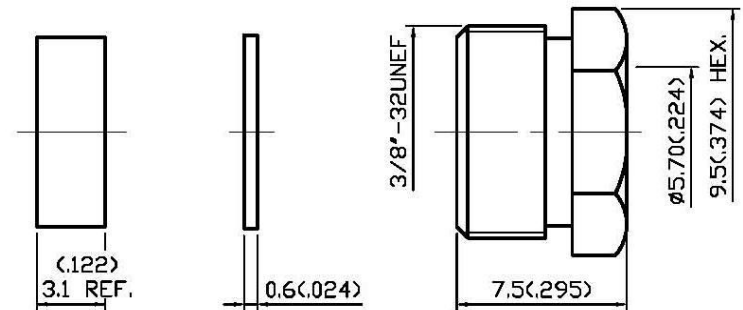

12	CENTER CONTACT	BRASS	1	GOLD
11	NUT	BRASS	1	NICKEL 100μ" MIN.
10	WASHER	BRASS	1	NICKEL
9	GASKET	RUBBER	1	RED
8	BRAID CLAMP	BRASS	1	NICKEL 100μ" MIN.
7	WASHER	BRASS	1	NICKEL
6	SPRING WASHER	SK-5	1	NICKEL
5	WASHER	BRASS	1	NICKEL
4	GASKET	RUBBER	1	RED
3	INSULATION	TEFLON	1	NONE
2	BODY	BRASS	1	NICKEL 100μ" MIN.
1	SHELL	ZINC	1	NICKEL
NO	DESCRIPTION	MATERIAL	Q'TY	FINISH

APPROVED by _____ DATE: _____



DESCRIPTION		BNC STRAIGHT PLUG CLAMP			
製圖	DRAWN	TOLERANCE	品名	13-01-3	T.G.Z H551014
	Yoko		TITLE	\ROHS COMPLIANT <50Ω>	日期
檢圖	CHECK	單位	單位	DWG.NO. 13-0006	
	Arc		mm(in)	SCALE	
認定	APPROVAL	ANGLE	比例		
	Jenny		±5°	4:1	
		REV.	A-0		