


# Datasheet

## H07V-K Cable

9028394  
 9028397  
 9028391  
 9028401  
 9028404  
 9028408  
 9028417  
 9028410  
 9028414  
 9028423  
 9028426  
 9028420  
 9028439  
 9028432  
 9028436  
 9028445  
 9028448  
 9028442  
 9028451  
 9028454

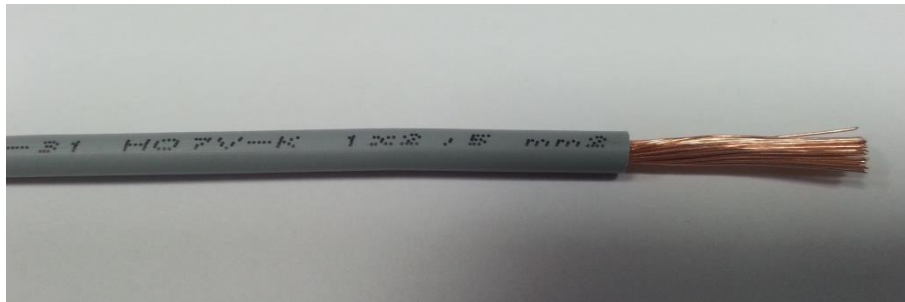

- PVC insulated cables with rated voltage of up to & including 450/750V
- For fixed installations
- Flame retardant to IEC 60332-1

No. of Cores and mm <sup>2</sup> per conductor	Cu ∅ Mm	Insulation thickness Nominal mm	Outer diameter in mm	Max. resistance at 20°C (Ω/km)
1x1,5	27/0,25	0,70	2,80-3,40	13,3
1x2,5	45/0,25	0,80	3,40-4,10	7,98
1x4	50/0,30	0,80	3,90-4,8	4,95
1x6	75/0,30	0,80	4,4-5,3	3,3