


NO	DESCRIPTION	DATE
⚠	BACKGROUND FORMAT UPDATED	04.25.03'
②	MODIFICATION PART ⑤⑥	10.21.06'
③	BACKGROUND FORMAT UPDATED	10.30.08'
④	DEL INTERFACE -65°C TO +165° C → -40°C TO +60° C	03.01.10'
⚠	WORKING VOLTAGE → VOLTAGE RATING DEL PROOF VOLTAGE	04.01.14'

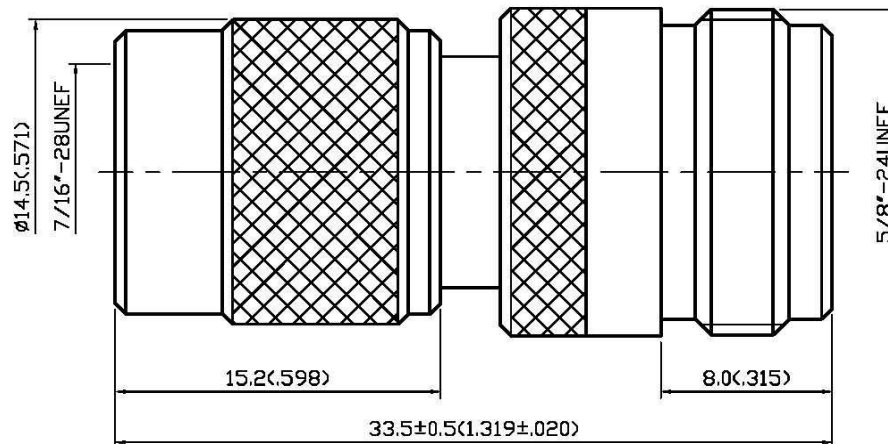

**1.0 ELECTRICAL**

- 1.1 FREQUENCY RANGE: DC-11 GHz
- 1.2 NOMINAL IMPEDANCE: 50 OHM
- 1.3 VOLTAGE RATING: 500 VOLTS MAX. ⚠

**2.0 MATERIALS**

- 2.1 BODIES: BRASS PER JIS-C3604
- 2.2 CENTER CONTACT: BRASS PER JIS-C3604

**3.0 FINISHES AND OTHERS**

- 3.1 SEE BELOW TABLE FOR DETAILS.

**4.0 ENVIRONMENTAL**

- 4.1 OPERATING TEMPERATURE RANGE: -40° C TO +60° C ⚠

8	CHASSIS	BRASS	1	NICKEL 100μ" MIN.
7	INSULATION	POM	1	NONE
6	CENTER CONTACT	BRASS	1	GOLD
5	BODY	BRASS	1	NICKEL 100μ" MIN.
4	WASHER	BRASS	1	NONE
3	SHELL	BRASS	1	NICKEL 100μ" MIN.
2	GASKET	RUBBER	1	RED
1	INSULATION	POM	1	NONE
NO	DESCRIPTION	MATERIAL	Q'TY	FINISH

APPROVED by \_\_\_\_\_ DATE: \_\_\_\_\_



DESCRIPTION		STRAIGHT TNC PLUG-N JACK ADAPTER							
製圖	DRAWN	TOLERANCE	品名	15-44 D.G.N	日期	DATE	版次	REV.	TITLE
	Kristina								
檢圖	CHECK	UNIT	單位	DWG.NO.	15-0132	SCALE			
	Arc								
認定	APPROVAL	ANGLE	比例	5465272					
	Angela								