


Datasheet

Feed Through Terminal Block

RS Stock number 872-4694

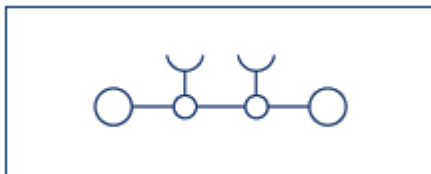

Feed-through terminal
2 connections

Features

- Foot can be snapped on TS 35 DIN rail
- Housing made from Polyamide 6.6 UL 94-V0

Specifications:

Rated cross-section, mm²|AWG: 35 | 16-1/0

Rated impulse voltage, kV|Contamination degree: 8|3

Plug gauge acc. to EN 60 947-1|Flamm. class acc. to UL 94: B9|V0

Connection data

Single wire (solid)|stranded, mm²: 1.5-50|

Finely-stranded|finely-stranded (w/ferrules DIN 46 228/1), mm²: 1.5-50 | 1.5-35

Clamping area, mm²: 1.5-50

Stripping length, mm: 18

Torque, Nm|Screw: 3.2-3.7|Slotted M6