

Meeting today's lubrication needs and tomorrow's demands

# LUPROMAX®

Lubricates • Protects • Maximizes

## LUPROMAX PULLING LUBRICANT SERIES

PRODUCT BROCHURE

Version Release 2007.7.1

# ENVIRONMENTALLY SAFE & NON-TOXIC



### LUPROMAX LUBRICANT RANGE

- Metalworking Fluids
- Greases - Mineral, Silicone, Synthetic
- Gear Oil Additives
- Open Gear Lubricants
- Pulling Lubricants
- Engine Oil Additives
- Fuel Oil Additives
- Penetrating Oil Additives
- Wire Rope Lubricants
- Aerosol Lubricants

### PRODUCT MODEL

**LUPROMAX**

### PRODUCT CATEROGY

LUPROMAX Pulling Lubricant Series

### PRODUCT NAME

**LUPROMAX-GCL**  
GEL CABLE PULLING LUBRICANT

### PRODUCT BRIEF

**LUPROMAX-GCL** is a water-based clear gel cable pulling lubricant specially developed to eliminate the mess and staining caused by the conventional oil based lubricants. It is compatible with all common cables, including polyethylene jackets, and does not pollute the environment as it evaporates after use. **LUPROMAX-GCL** is non toxic and does not cause any harms to applicators.

**LUPROMAX-GCL** exhibits good friction reducing properties and does not cement-in cables. It is non-flammable and eliminates all potential fire hazards as compared to wax-based cable pulling lubricants.



#### Headquarters & Far East

##### Office:

Magna International Pte Ltd  
Blk 9005, Tampines Street 93,  
#02-242 Tampines Industrial Park A,  
Singapore 528839

Tel (65) 6788-1228

Fax (65) 6785-1497

##### Email

magnaintl@pacific.net.sg

##### Website

<http://www.magnachem.com.sg>

#### North America Office:

No. 15 Bowman Avenue  
Matheson, Ontario P0K 1N0  
Canada

Tel 705-273-3353

Fax 705-273-3352

Email [magna@ntl.sympatico.ca](mailto:magna@ntl.sympatico.ca)

The details of our products are given completely free of undertaking. Since their application lies outside our control, we cannot accept any liability for the results. User shall determine the suitability of the product for its intended use, and user assumes all risk and liability whatsoever in connection therewith.

## FEATURES & BENEFITS

---

- Environmentally Safe & Non-Toxic
- Non-Flammable- Eliminates all fire hazards
- Thermal Stable and Wide Operational Temperature Range
- Low solids will not cement-in cables
- Compatible with all common cables, including polyethylene jackets.
- Ease of applications
- Clean and non-staining
- Non-combustible

## TYPICAL PROPERTIES

---

### APPEARANCE

- Clear, odourless, colourless stringy liquid

### FLASH POINT

- None

### pH

- 6.5 to 7

### TOXICITY

- Non-toxic

### OPERATIONAL TEMPERATURE RANGE

- 0°C up to 60°C

### LUBRICITY


- PVC/ LDPE jacketed cable on PVC conduit at 90 kgs/ 0.3 m normal pressure; coefficient of dynamic friction <.22. PVC or LDPE jacketed cable on LDPE conduit at 90kgs/0.3m normal pressure; coefficient of dynamic friction <.14.

### CABLE COMPATIBILITY

- No deleterious effects on physical or electrical properties of common cable jackets

For more information about **LUPROMAX**, please request for **LUPROMAX PRODUCT GUIDE** from any **LUPROMAX** representative.

Please contact our distributor or reseller for more information:

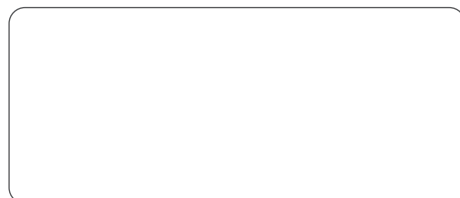

#### Headquarters & Far East Office:

Magna International Pte Ltd  
Blk 9005, Tampines Street 93,  
#02-242 Tampines Industrial Park A,  
Singapore 528839.  
Tel (65) 6788-1228  
Fax (65) 6785-1497  
Email [magnaintl@pacific.net.sg](mailto:magnaintl@pacific.net.sg)  
Website <http://www.magnachem.com.sg>

#### North America Office:

No. 15 Bowman Avenue  
Matheson, Ontario P0K 1N0  
Canada  
Tel 705-273-3353  
Fax 705-273-3352  
Email [magna@ntl.sympatico.ca](mailto:magna@ntl.sympatico.ca)



Magna International Pte Ltd.  
Website: <http://www.magnachem.com.sg>